MILITARY SPECIFICATION SHEET

(A) CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, STRAIGHT, RFI, EMI, CATEGORY 3B (FOR MIL-C-38999 SERIES III AND IV CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the accessories described herein shall consist of this specification sheet and the latest issue of MIL-C-85049.

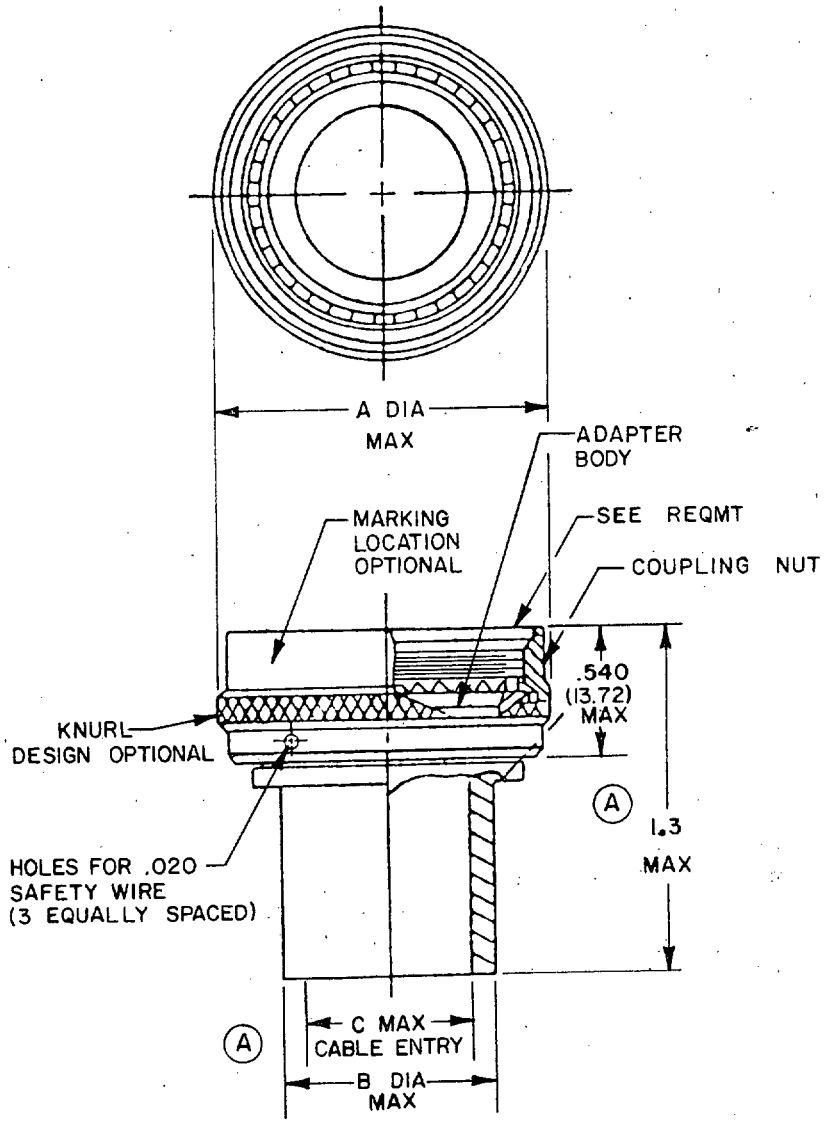


FIGURE 1. Configuration and dimensions.

(A) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

Ⓐ

Shell size	A DIA MAX	B DIA MAX	C MAX Cable Entry	M85049/26-2 Ring, shield crimp (Ref)
9	.75 (19.1)	.347 (8.81)	.265 (6.73)	-8
11	.85 (21.6)	.498 (12.65)	.343 (8.71)	-10
13	1.00 (25.4)	.510 (12.95)	.437 (11.10)	-12
15	1.10 (27.9)	.630 (16.00)	.562 (14.27)	-14
17	1.25 (31.8)	.760 (19.30)	.687 (17.45)	-16
19	1.40 (35.6)	.890 (22.61)	.812 (20.62)	-18
21	1.50 (38.1)	1.010 (25.65)	.937 (23.80)	-20
23	1.65 (41.9)	1.130 (28.70)	1.046 (26.57)	-22
25	1.75 (44.5)	1.202 (30.53)	1.125 (28.58)	-24

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Metric equivalents are in parentheses.
5. Crimp tool is Burndy Y40LH or equivalent.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Interface dimensions shall conform to MIL-C-38999 series III and IV.

The coupling nut shall be captivated to the adapter body and free to rotate.

Simplified assembly instructions shall be shipped with the unit package.

Material:

Ⓐ Adapter body and coupling nut - Aluminum alloy in accordance with MIL-C-85049.

Ⓐ Finish: In accordance with MIL-C-85049.

1/ N - Electroless nickel
W - Cadmium - olive drab

Part number: See example below:

M85049/ 20 - 11 W

Military designator
Specification sheet
Shell size, see table I
Finish

QUALIFICATION: See MIL-C-85049, category 3B.

Ⓐ QPL evaluating activity: Naval Avionics Center, Code D/714, 6000 East 21st Street, Indianapolis, Indiana 46218.

1/ Not for Navy use. Limited to Space application for Air Force use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 19, 99
DLA - ES

User activity:
Army - AV

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3294-3)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983-605-034/1791

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.