[INCH-POUND]

A-A-183B
December 11, 1991
SUPERSEDING
A-A-183A
March 26,1980

COMMERCIAL ITEM DESCRIPTION

SHEATH, PEN AND PENCIL, POCKET (PLASTIC)

The General Services Administration has authorized the use of this commercial item description as a replacement for Federal Specification GG-S-00310 which has been cancelled.

This commercial item description covers pocket sheaths of one size and style. The pocket sheath is intended for use as a holder and protector when carrying pens, pencils, scales and similar equipment in shirt pockets.

1. Salient Characteristics

A. The dimensions and features of the pocket sheath shall conform to Figure 1. The color of the sheath shall be clear with a matte finish or white with a plain or embossed finish.

B. The sheath material shall be homogenous and free of surface defects and uniform in appearance.

C. It shall be constructed of flexible plastic (0.014 ± 0.001 inches thick) and be comprised of no more than three pieces of plastic, with one piece each composing the front, back, and downward projecting front flap.

D. The sheath shall be designed to be safe in normal usage and shall pass the flammability test when tested as specified in 2C.

E. All seams shall be straight, uniform and adequate to insure flexibility and strength. All cuts shall be straight, uniform and free of burrs and sharp corners.

F. The sheath shall pass the brittleness test when tested as specified in 2C.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:05Z
Check the source to verify that this is the current version before use.

Workmanship. The sheaths shall be free from fabrication defects which affect serviceability or appearance or may cause injury to the end user.

2. Quality Assurance Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the government. The Government reserves the right to perform any of the inspections set forth in this Commercial Item Description, where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

Each lot of sheaths shall be inspected for conformance to the requirements herein. Sampling for inspection shall be in accordance with MIL-STD-105 using the plans specified below.

A. Visual characteristics - Inspection Level S-2 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one sheath.

B. Dimensional characteristics - Inspection Level S-2 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one sheath.

C. Tests - (see below) Inspection Level S-2 with an Acceptable Quality Level (AQL) of 4.0 percent defective. The sample unit shall be one sheath.

Flammability Test

Test the specimen in accordance with ANSI/ASTM D568.
If the specimen burns when in contact with the flame, but will not continue to burn when removed from the flame, it is flame resistant. If the specimen continues to burn at a rate of 2.0 inches or less per minute, it is slow burning. If the specimen bursts into flames or burns at a rate faster than 2.0 inches per minute,it does not meet the requirements of this test.

Brittleness Test

Test the specimen in accordance with ASTM D1790-90.
Note:In lieu of the above test, material data tracible by lot from the material manufacturer to the end item fabricator may be used. The lower temperature limit shall be zero degrees Fahrenheit.

D. Packaging, Packing, and Marking - Inspection Level S-2 with an AQL of 4.0 percent defective. The sample unit shall be one fully prepared shipping container.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T08:05Z
Check the source to verify that this is the current version before use.

3. Preparation for delivery
packaging, packing and marking shall be as specified in the contract or purchase order.

4. Recovered materials

The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

5. Application for copies of technical documents referenced herein:
The issue date in effect on date of invitation for bids or request for proposal shall apply (Unless Otherwise Specified).

A. Mil-STD-105 (Sampling Procedures And Tables For Inspection By Attributes) Military Specifications are available from the, Standardization Documents Order Desk, Building 4D, 700 Robins Ave., Philadelphia, PA. 19111-5094.

B. Public Law 94-580, Resource Conservation and Recovery Act, is part of U.S. Code, Title 42. Available from congressional sales office, U.S. Government Printing Office, Washington, D.C. 20402.

C. ANSI/ASTM D568 (Rate Of Burning Of Plastics in The Vertical Position) ANSI/ASTM test methods. Application for copies of test methods should be addressed to the American Society for Testing and Materials; 1916 Race Street; Philadelphia, PA 19103.

D. ASTM D1790-90/Brittleness Test for plastic sheet.
Application for copies of test methods should be addressed to the American Society for Testing and Materials; 1916 Race Street; Philadelphia, PA 19103.

6.Notes
A.Ordering Data

Purchasers should specify the packaging, packing and marking required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:05Z
Check the source to verify that this is the current version before use.

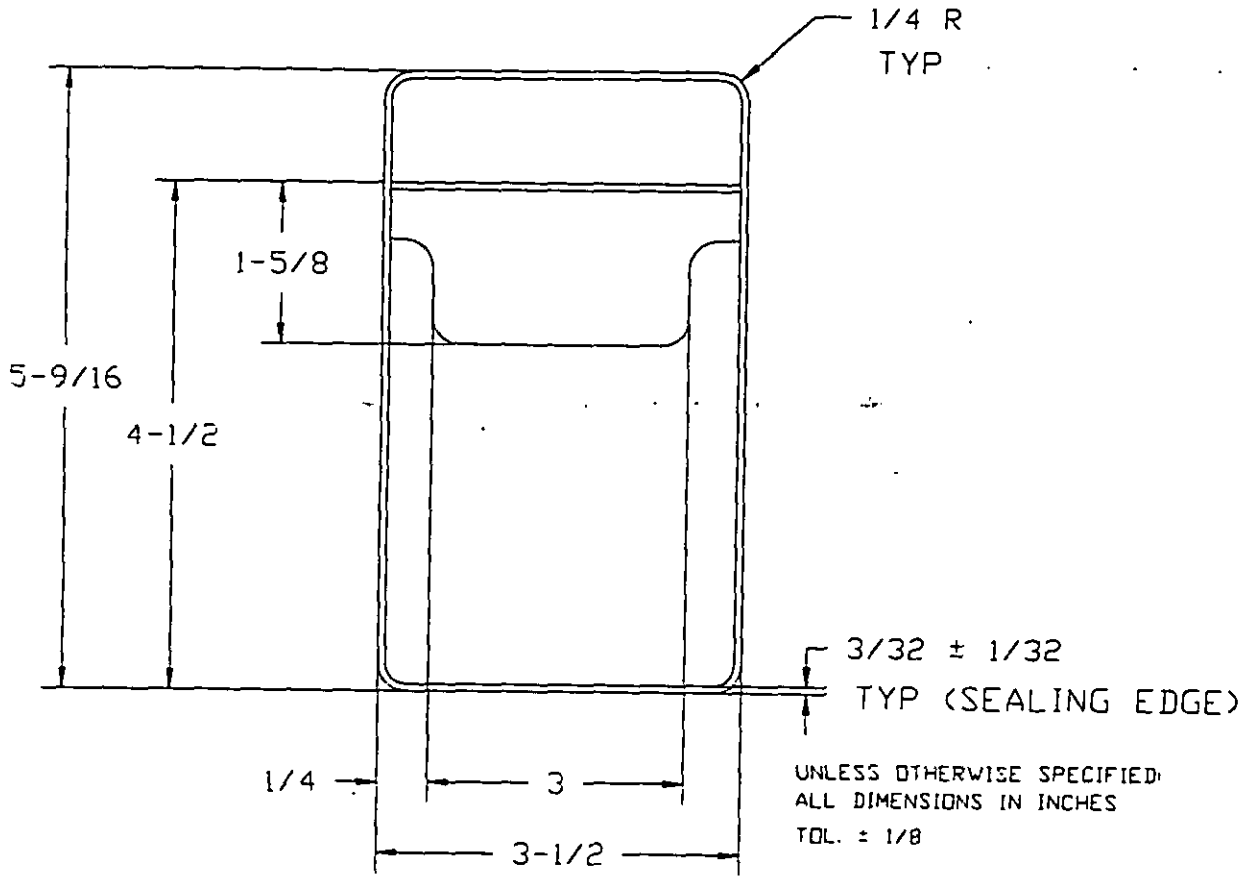


FIGURE 1

MILITARY INTERESTS:
None Registered

PREPARING ACTIVITY:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:05Z
Check the source to verify that this is the current version before use.