A-A-2434
June 2, 1986

COMMERCIAL ITEM DESCRIPTION

FILE, HAND (SWISS PATTERN), PILLAR, REGULAR

The General Services Administration has authorized the use of this commercial item description in preference to Type XI, Class 3 of Federal Specification GGG-F-331.

This commercial item description covers hand files used for smoothing and finishing flat surfaces.

Salient characteristics:

Material: Carbon alloy steel.


Design: Uniform in width from heel to point. Either uniform or slightly tapered in thickness from heel to point. Double-cut (two sets of parallel cuts on the surface, one set crossing the other) on both flat sides. Uncut (safe) on the two square edges.

Tang: Of a conventional shape and size suitable for attachment to a wood handle. Tempered to a maximum hardness of 45 on the Rockwell C scale at a point approximately midway of its length and width.

Teeth: Uniformly cut or etched and of uniform height throughout the fully cut portion. Cutting surfaces hardened to a uniform hardness. The distance between the heel and point of the file, excluding the tang, shall be hardened to not greater than 68 nor less than 63 on the Rockwell C scale. Free from decarburization and brittleness.

Marking: Marked with the cut number, the country of origin, and the name of the manufacturer or with a trademark of such known character that the source of manufacture may be readily determined.

Workmanship: The teeth of the file shall be well-defined, sharp, and uniform in height and form. There shall be no evidence of rust or other defect which may impair serviceability, durability, or appearance.

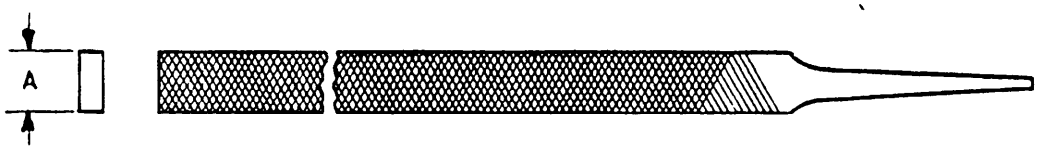

tional Stock Number	Cut Number	Length Inches	Dimension at section A Inch	Number of teeth per inch	Allowable distortion (maximum) Inch	Allowable warpage (maximum) Degrees
10-00-293-1487	0	6	31/64	50	0.006	2
10-00-156-0108	0	8	39/64	46	.008	2
10-00-239-7625	1	6	31/64	66	.006	2
10-00-239-7626	2	6	31/64	84	.006	2
10-00-156-0114	3	8	39/64	98	.008	2
10-00-239-7621	4	4	23/64	130	.004	2
10-00-239-7627	4	6	31/64	120	.006	2

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:22Z
Check the source to verify that this is the current version before use.

Length dimension: Measured from the point (free or front end) to the heel (junct
of the tang with the body of the file) and have a tolerance o:
plus or minus 1/8 inch.

Tolerance: Width (A) - plus or minus 1/32 inch.
Number of teeth per inch - plus or minus 5 percent.

Regulatory requirements. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of t ehhighest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performa requirements or exposing suppliers' employees to undue hazards from the recovere materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packa ing, packing, labeling, and marking shall be as specified in the contract or orde

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:22Z
Check the source to verify that this is the current version before use.