A-A-462B
September 1, 1988
SUPERSEDING
A-A-462A
July 8, 1988

COMMERCIAL ITEM DESCRIPTION

HOOK AND EYE, DOOR

The General Services Administration has authorized the use of this commercial item description in lieu of Federal Specification FF-H-111C.

This commercial item description covers steel wire hooks and eyes for securing doors.

Salient characteristics:

Design. The hook and eye shall consist of a hook and eye assembly and an additional eye similar to that shown in figure 1 below. Hook lengths shall be 1 to 6 inches as specified. Hook length shall be determined as shown in figure 1 below. The dimensional tolerance for hook length shall be ± 1/4 inch. The eyes shall have self-tapping wood screw threads. The minimum diameter of 1 through 3 inch length hooks shall be 7/64 inch. The minimum diameter for 4 through 6 inch length hooks shall be 9/64 inch. The minimum diameter for eyes shall be 7/64 inch, regardless of hook length.

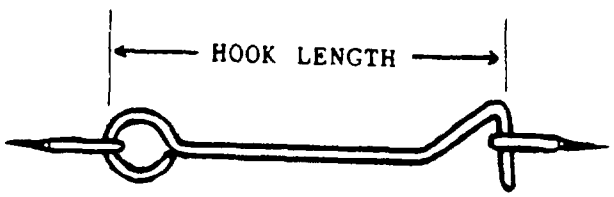


Figure 1

Finish. The hook and eyes shall have either a bright steel finish or zinc coating in accordance with ANSI/BHMA A156.18 finish code 603 or 604 as specified.

Workmanship. The hooks and eyes shall have a smooth surface and be free of defects affecting serviceability or appearance.

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

Quality Assurance Provisions. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Sampling.

Lot. All hooks and eyes of the same size and finish presented for acceptance at one time shall be considered a lot for purposes of inspection.

Sampling for quality conformance examination and testing. A random sample of hooks and eyes shall be selected from each lot in accordance with Military Standard MIL-STD-105 `Sampling Procedures And Tables For Inspection By Attributes'.

Visual and dimensional inspection. Samples shall be selected in accordance with MIL-STD-105, special inspection level S-1, AQL 6.5 expressed in terms of defects per hundred unit The hooks and eyes shall be visually and dimensionally examined to verify compliance with this specification.

Examination for preparation for delivery. A random sample of unit, intermediate and shipping containers (as applicable) shall be selected from each lot and examined for conformance with the preservation, packaging, packing, labeling and marking required in the contract or order. Samples shall be selected in accordance with MIL-STD-105, Inspection level II, AQL 6.5 expressed in terms of defects per hundred unit

Preservation,packaging,packing,labeling,and marking (Civil Agencies). The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Packaging (DOD). The packaging shall be in accordance with ASTM Standard D3951 `Commercial Packaging, Practice for'.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

Notes:

Ordering activities should specify hook length and finish.

The COMMERCIAL ITEM CERTIFICATION CLAUSE is not required when this commercial item description is used for procurement.

Copies of Military Standard 105 are available from the Naval Publications and Forms Center, 5801 Tabor Ave., Philadelphia, PA 19120.

ASTM standards are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia,PA 19103.

ANSI/BHMA standards are available from the Builders Hardware manufacturers Institute, 60 East 42nd Street, New York, NY 10165

The standards referenced in this document shall be the issues in effect on the date of the invitation for bids or request for quotation and shall be used to determine compliance with these requirements. In the event that there is a conflict between this document and a standard referenced herein, this document shall take precedence.

PREPARING ACTIVITY:
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.