
FEDERAL SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, GENERAL PURPOSE, HOSPITAL GRADE
GROUNDING, 2 POLE, 3 WIRE, 15 AMPERES, 125 VOLTS, 50/60 HERTZ

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification W-C-596.

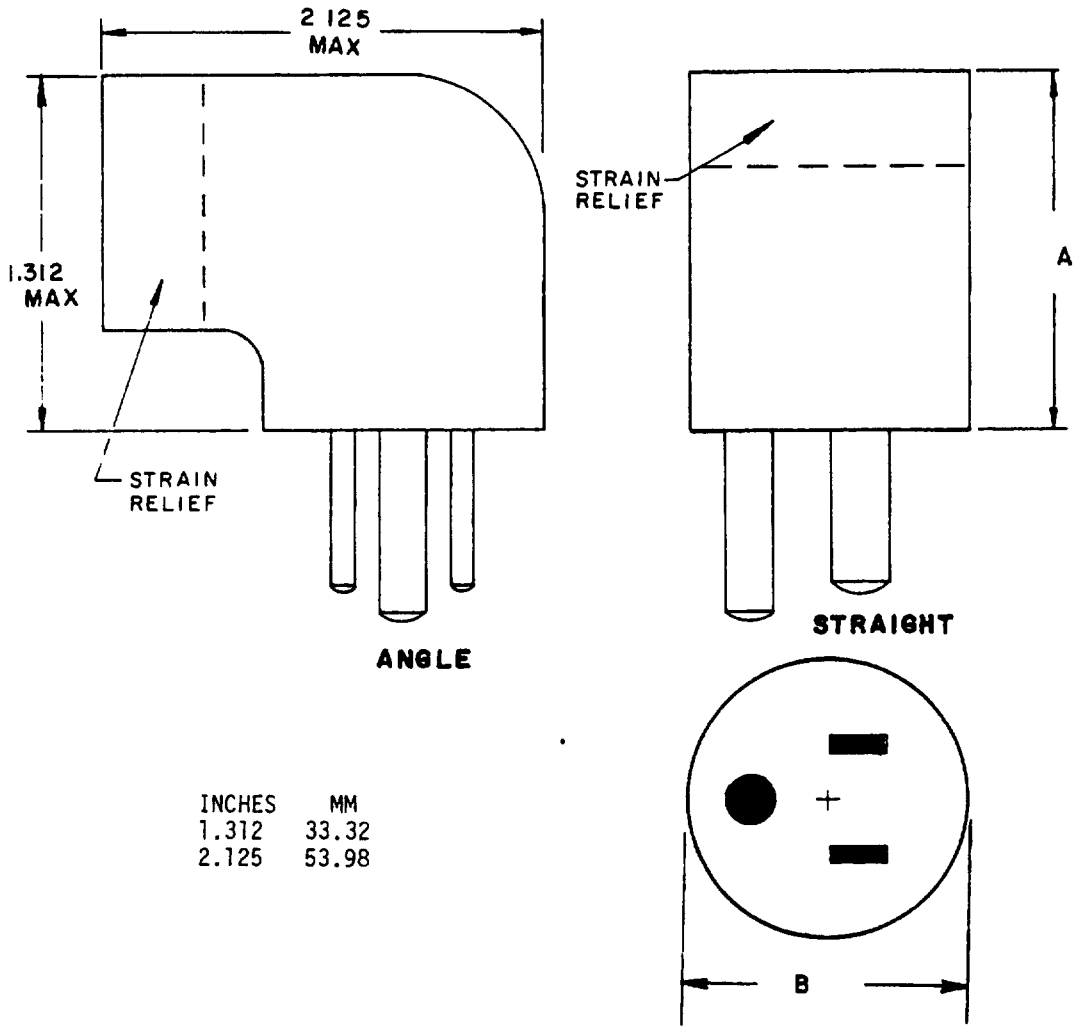

INCHES	MM
1.312	33.32
2.125	53.98

FIGURE 1. Dimensions and configuration.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Design and configuration Hospital grade (see figure 1). Wiring method to provide straight-in wiring using clamp type terminals.

Dimensions conform to ANSI C73.11.

Mating face Dead-front construction.

Armored construction: Not acceptable.

Ratings.
Voltage. 125 volts.
Current: 15 amperes.
Frequency 50/60 Hertz.

Mating connector: W-C-596/11, W-C-596/12, or W-C-596/14.

Strain relief Accommodate cable diameter .325-.575 inch (8.26-14.60 mm).

Blade strength. Connectors shall not have wires connected to terminals during test.

Part number. WC596/13- (dash number from table I).

TABLE I. Dash number.

Dash number	Supersedes style	Description	A(max)	B(max)
3 1/	D21, D22, D23, D24, D25, D26, D27	Straight, dead front plug	2.750	1.550
4 2/	D21, D22, D23, D24, D25, D26, D27	Angled, dead front plug	---	---
5 3/		Straight, dead front plug	1 90	1.250

1/ WC596/13-3 supersedes WC596/13-1.
2/ WC596/13-4 supersedes WC596/13-2.
3/ WC596/13-5 is a minature version of W-C-596/13-3 for use with test equipment where power cables are stored within the equipment.

TABLE II. Supersession and cross reference.

Active Government part number	Superseded Government part number	Superseded numbers									
		FSCM 4/ 75582	FSCM 04009	FSCM 71183	FSCM 73586	FSCM 77881	FSCM 81091	FSCM 21873	FSCM 79409	FSCM 39317	FSCM 74545
WC596/13-3	WC596/13-1	5010 5010-I 614 615 5007 5008 5078 5079	5211 5214 5216 5274 5276 5263 5263-I	5263-I 5263 5274 5276 5256 5264 5266 5266N 5266NCR 5266NSY 8266N	2517B-I 2517-B 2501 2517	515 516 583 584 587 588	5263-I 5263	5276 5200	1447	515P	5266-C 5923 8215-C
WC596/13-4	WC596/13-2			5295 5295T 8295		589	5264-AN 5266-AN		14R47 14T47		5266-CA 5266-CAT

4/ FSCM is the Federal Supply Code for Manufacturers in accordance with Federal Supply Handbooks H4-1 and H4-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:28Z
Check the source to verify that this is the current version before use.

Military custodians:
Army - CR
Navy - YD
Air Force - 85

Review activities
Army - MI
Navy - EC, AS
Air Force - 11, 99

User activities.
Army - ME, AV
Navy - MC, SH
Air Force -

Preparing activity.
DLA - ES

Civil agency coordinating activities:
DCGOVT - DCG
DOT - ACO
GSA - FSS, PCD
HEW - FEC
Interior - BPA
USDA - AFS
VA - DMS

(Project 5935-3123-3)

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of the general specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:28Z
Check the source to verify that this is the current version before use.