MIL-J-641/2D
1 July 1971
SUPERSEDING
MIL-J-641/2C
3 April 1968


MILITARY SPECIFICATION SHEET

JACKS, TELEPHONE

TYPES JJ-016, JJ-017, JJ-024, JJ-035, JJ-072, JJ-084, JJ-085, JJ-086, AND JJ-087

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the jacks described herein shall consist of this document and the latest issue of specification MIL-J-641.

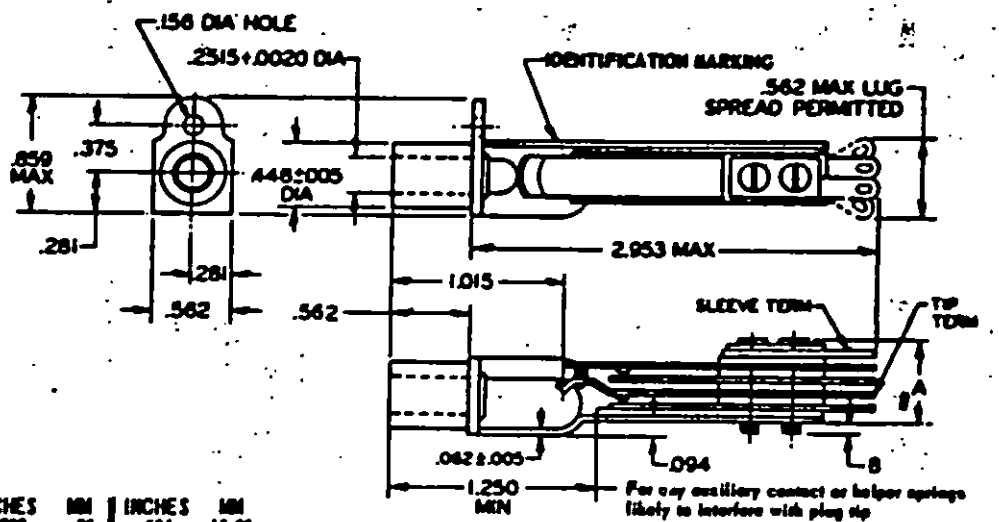


INCHES	MM	INCHES	MM
.0020	.05	.594	15.09
.005	.13	.625	15.88
.015	.38	.656	16.66
.040	1.02	.719	18.26
.062	1.57	.750	19.05
.094	2.39	.781	19.84
.156	3.96	.844	21.44
.2515	6.39	.859	21.82
.281	7.14	.906	23.01
.375	9.53	.922	23.42
.438	11.13	1.015	25.78
.448	11.38	1.094	27.79
.500	12.70	1.250	31.75
.562	14.27	2.953	75.01

			Center-to-center dimensions for multiple mounting on panel.	
Type	A (min)	B (min)	In direction of pileup (min)	At right angle to pileup (min)
JJ-016	.562	.040	.719	.922
JJ-017	.750	.062	.906	
JJ-024	.500	.040	.656	
JJ-035	.625	.062	.781	
JJ-072	.625	.062	.781	
JJ-084	.625	.062	.781	
JJ-085	.562	.040	.781	
JJ-086	.438	.062	.594	
JJ-087	.844	.062	1.094	


Table 1.

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:00Z
Check the source to verify that this is the current version before use.




Schematic J8
JJ-016




Schematic J4-D
JJ-017




Schematic J4
JJ-024




Schematic J1-C
JJ-035




Schematic J4-B
JJ-072




Schematic J1-A
JJ-084



Schematic J4-B
JJ-085
(with IB lead spring connected to frame)



Schematic J1
JJ-086



Schematic J1-A-C
JJ-087

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerance on dimensions is ±.015.
2. Metric equivalents (to the nearest .01 mm) are given for general information only, and are based upon 1 inch = 25.4 mm.
3. Multiple mounting: Jacks may be multiple-mounted on a panel in accordance with the minimum center-to-center dimensions specified in table I.
4. Arrangement of contact spring fibers is optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as follows:

Insertion force - - - - - - - - - 7 pounds (maximum).

Withdrawal force - - - - - - - - 1.5 pounds (minimum).
7 pounds (maximum).

Test plug TP55, conforming to MIL-J-641, shall be used.

Spring life: Test plug TP55, conforming to MIL-J-641, shall be used.

Frame strength: Frame strength test is applicable.

Terminal of tip contact spring shall be on left side when terminals are viewed from the rear, with the jack in a position such that the contact spring pileup is on top of the jack frame.

Cutout in jack frame shall be positioned so that a minimum of .016 inch clearance exists between the tip of the TP55 plug and the edge of the frame cutout at all times during insertion of the plug.

Ground terminal shall be placed on top of pileup, as shown in schematic.

Part number: M641/2- (dash number from table II).

TABLE II. Types of telephone jacks.

Dash no.	Type designation	Connection	Mounting	Switching action upon insertion of plug 1/
1	JJ-016	Tip and sleeve	Single hug	One make-break
2	JJ-017			One make-break, one break
3	JJ-024			One break
4	JJ-035			One break-make
5	JJ-072			Two breaks
6	JJ-084			One make
7	JJ-085			Two breaks
8	JJ-086			None
9	JJ-087			One break-make, one make

1/ The hyphen indicates sequence.

TABLE III. Group qualification.

Submission and qualification of following types:	Qualifies the following types:
JJ-017 or JJ-087	JJ-016, JJ-017, JJ-024, JJ-035 JJ-072, JJ-084, JJ-085, JJ-086, JJ-087
JJ-072 or JJ-085	JJ-016, JJ-024, JJ-035, JJ-072, JJ-084, JJ-085, JJ-086
JJ-016 or JJ-035	JJ-016, JJ-024, JJ-035, JJ-084, JJ-086
JJ-084 or JJ-024	JJ-024, JJ-084, JJ-086
JJ-086 1/	JJ-086

1/ Two JJ-086 jacks are required to mate with PJ-327 of MIL-P-642.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:00Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI, ME, SL, MU
Navy - AS
Air Force - 80
DSA - ES

User activities:
Army - MU, MI, WC, AV
Navy - OS, MC, SH, YD
Air Force - 17, 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-1854-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION TYPES JJ-016, JJ-17, JJ-024, JJ-35, JJ-72, JJ-84, JJ-85, JJ-86, AND JJ-987

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO (If "yes", in what way?)

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity - Optional) | DATE

DD FORM 1 JAN 64 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-PM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:00Z
Check the source to verify that this is the current version before use.