MIL-C-11272/12B
7 January 1970
SUPERSEDING
MIL-C-11272/12A
23 February 1961

MILITARY SPECIFICATION

CAPACITORS, FIXED, GLASS DIELECTRIC,

STYLE CY32

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION. USE MIL-C-23269.

1. SCOPE

1.1 This specification covers the detail requirements for style CY32, axial-lead, glass-dielectric (vitreous enamel), fixed capacitors.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-11272 Capacitors, Fixed, Glass Dielectric, General Specification for.


(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Requirements.** Requirements shall be in accordance with MIL-C-11272, and as specified herein.

3.2 **Design and construction.** Capacitors shall be of the design, construction, and physical dimensions specified on figure and in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:51Z
Check the source to verify that this is the current version before use.

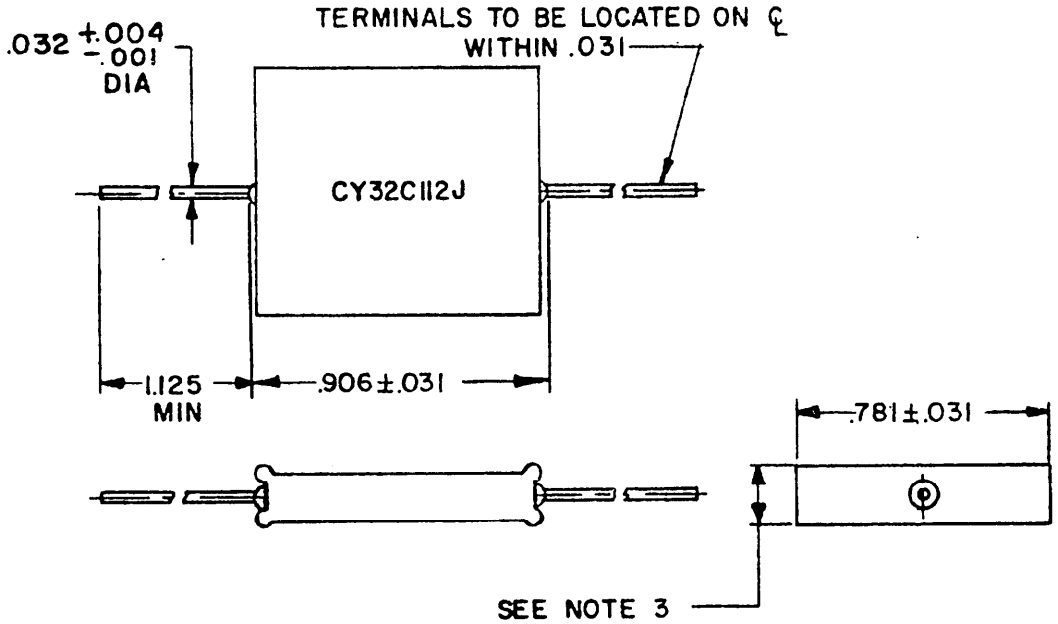

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.062	1.57	.906	23.01
.004	.10	.188	4.78	1.125	28.58
.031	.79	.250	6.35		
.032	.81	.781	19.84		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. For any value 2200 pF or less, this dimension shall be .188 ±.031; for any value above, this dimension shall be .250 $^{+.062}_{-.031}$.

Style CY32 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:51Z
Check the source to verify that this is the current version before use.

TABLE I. *Style CY32.*

Type designation 1/	Capacitance	DC rated voltage	Capacitance tolerances available
	pF	*volts*	*(±)*
CY32C112-	1,100	500	FGJ
CY32C122-	1,200	500	FGJ
CY32C132-	1,300	500	FGJ
CY32C152-	1,500	500	FGJ
CY32C162-	1,600	500	FGJ
CY32C182-	1,800	500	FGJ
CY32C202-	2,000	500	FGJ
CY32C222-	2,200	500	FGJ
CY32C242-	2,400	500	FGJ
CY32C272-	2,700	500	FGJ
CY32C302-	3,000	500	FGJ
CY32C332-	3,300	500	FGJ
CY32C362-	3,600	300	FGJ
CY32C392-	3,900	300	FGJ
CY32C432-	4,300	300	FGJ
CY32C472-	4,700	300	FGJ
CY32C512-	5,100	300	FGJ
CY32C562-	5,600	300	FGJ
CY32C622-	6,200	300	FGJ
CY32C682-	6,800	300	FGJ

1/ Complete type designation will include an additional letter symbol to indicate capacitance tolerance.

3.3 Life.

3.3.1 *For qualification inspection.* Capacitors shall meet the following requirements, as applicable:

(a) At 25°C:
  (1) Insulation resistance – 100,000 megohms or 100 ohmfarads, whichever is less.
  (2) Dissipation factor – Shall not exceed 0.002.
(b) At 125°C:
  (1) Insulation resistance – 10,000 megohms or 10 ohmfarads, whichever is less.
  (2) Dissipation factor – Shall not exceed 0.003.

3.3.2 *For quality conformance inspection.*

3.3.2.1 *Performance check.* Capacitors shall meet the following requirements:

(a) Insulation resistance – 100,000 megohms or 100 ohmfarads, whichever is less.
(b) Dissipation factor – Shall not exceed 0.002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:51Z
Check the source to verify that this is the current version before use.

3.4 **Quality factor (Q).** The Q shall be not less than 2,000.

3.5 **Temperature coefficient and capacitance drift.** The temperature coefficient and capacitance drift shall be within the limits specified in table II.

TABLE II. *Temperature coefficient and capacitance drift.*

Temperature coefficient	Capacitance drift (-55° to +125°C)
Parts/million/°C 105 ± 25	0.1 percent or 0.1 pF, whichever is greater.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-C-11272.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-11272.

6. NOTES

6.1 **Notes.** In addition to the notes specified herein, the notes specified in MIL-C-11272 are applicable to this specification.

Custodians:
Army – EL
Navy – EC
Air Force – 11

Review activities:
Army – EL
Navy – EC, SH
Air Force – 11, 17, 85
DSA – ES

User activities:
Army –
Navy –
Air Force – 19

Preparing activity:
Air Force – 11

Agent:
DSA – ES

(Project 5910-0904-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:51Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENESS
Wright-Patterson AFB, OH 45433

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:51Z
Check the source to verify that this is the currentversion before use.