
FED. SUP CLASS 5307

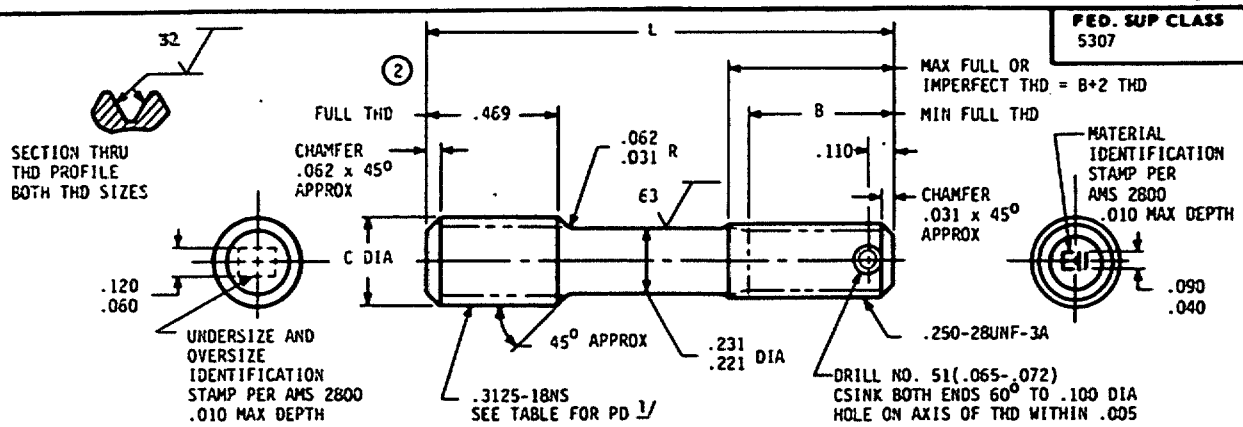

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C 1/		.307- .312	.307- .312	.307- .312	.307- .312	.316- .321	.316- .321
PD BEFORE PLATING		.2775-.2785	.2805-.2815	.2835-.2845	.2865-.2875	.2895-.2905	.2925-.2935
PD AFTER PLATING		.2780-.2795	.2810-.2825	.23400.2855	.2870-.2885	.2900-.2915	.2930-.2945
PD LEAD THREAD		.2714-.2734	.2744-.2764	.2774-.2794	.2804-.2824	.2834-.2854	.2864-.2884
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.031	.438	AN152919	AN152920	AN152921	AN152922	AN152923	AN152924
1.094	.500	AN152925	AN152926	AN152927	AN152928	AN152929	AN152930
1.156	.562	AN152931	AN152932	AN152933	AN152934	AN152935	AN152936
1.219	.562	AN152937	AN152938	AN152939	AN152940	AN152941	AN152942
1.281	.562	AN152943	AN152944	AN152945	AN152946	AN152947	AN152948
1.344	.562	AN152949	AN152950	AN152951	AN152952	AN152953	AN152954
1.406	.562	AN152955	AN152956	AN152957	AN152958	AN152959	AN152960
1.469	.562	AN152961	AN152962	AN152963	AN152964	AN152965	AN152966
1.531	.562	AN152967	AN152968	AN152969	AN152970	AN152971	AN152972
1.594	.562	AN152973	AN152974	AN152975	AN152976	AN152977	AN152978
1.656	.562	AN152979	AN152980	AN152981	AN152982	AN152983	AN152984
1.719	.562	AN152985	AN152986	AN152987	AN152988	AN152989	AN152990
1.781	.562	AN152991	AN152992	AN152993	AN152994	AN152995	AN152996
1.844	.562	AN152997	AN152998	AN152999	AN153000	AN153001	AN153002
1.906	.562	AN153003	AN153004	AN153005	AN153006	AN153007	AN153008
1.969	.562	AN153009	AN153010	AN153011	AN153012	AN153013	AN153014
2.031	.562	AN153015	AN153016	AN153017	AN153018	AN153019	AN153020
2.094	.562	AN153021	AN153022	AN153023	AN153024	AN152025	AN152026
2.156	.562	AN153027	AN153028	AN153029	AN153030	AN153031	AN153032
2.219	.562	AN153033	AN153034	AN153035	AN153036	AN153037	AN153058
2.344	.562	AN153039	AN153040	AN153041	AN153042	AN153043	AN153044
2.469	.562	AN153045	AN153046	AN153047	AN153048	AN153049	AN153050
2.594	.562	AN153051	AN153052	AN153053	AN153054	AN153055	AN153056
2.719	.562	AN153057	AN153058	AN153059	AN153060	AN153061	AN153062
2.844	.562	AN153063	AN153064	AN153065	AN153066	AN153067	AN153068
2.969	.562	AN153069	AN153070	AN153071	AN153072	AN153073	AN153074
3.094	.562	AN153075	AN153076	AN153077	AN153078	AN153079	AN153080
3.219	.562	AN153081	AN153082	AN153083	AN153084	AN153085	AN153086
3.344	.562	AN153087	AN153088	AN153089	AN153090	AN153091	AN153092
3.469	.562	AN153093	AN153094	AN153095	AN153096	AN153097	AN153098

1/ PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

NOTES:
1. MATERIAL: STEEL AMS 6322- (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
2. HARDNESS: ROCKWELL C26-32.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
4. SURFACE ROUGHNESS: AS 107.
5. MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
6. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED:
8. TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

(2) REVISED AND REDRAWN

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 MAY 50 REVISED (1) 25 MAR 55 (2) 14 OCT 61

User activity:

Review activity:
DLA - IS
NS

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

P.A.	11
Other Cust	AS

PROCUREMENT SPECIFICATION
NONE

AERONAUTICAL STANDARD

STUD, STEPPED, DRILLED, 1.5 DIS ENGAGEMENT, .3125-18 x .250-28

AN152901 THRU AN153200

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.

DISC Form 1299
APR 76

PROPOSED