
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN159501 THRU AN159800

FSC 5307

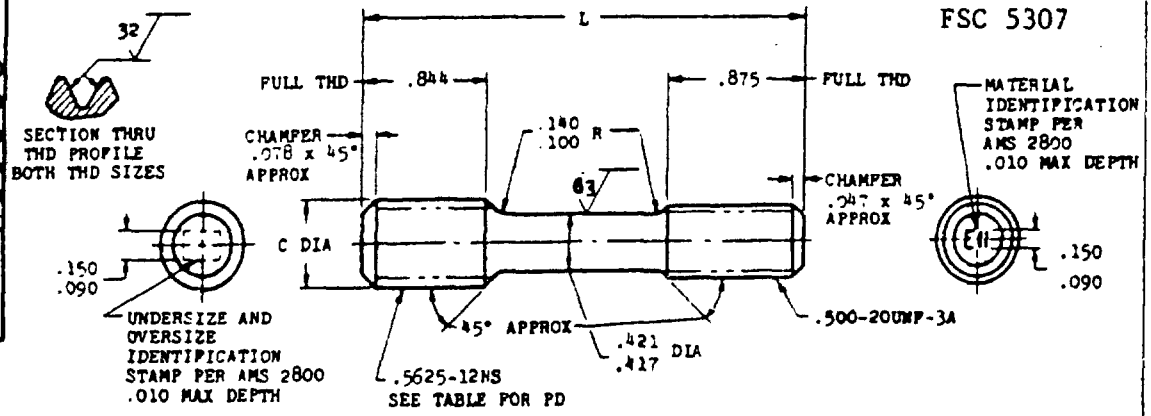

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003	STANDARD	+.003	+.006	+.009	+.012
	(-3)	( )	(3)	(6)	(9)	(12)
C	.557- .562	.557- .562	.557- .562	.557- .562	.566- .571	.566- .571
PD BEFORE PLATING	.5104-.5114	.5134-.5144	.5154-.5174	.5194-.5204	.5224-.5234	.5254-.5264
PD AFTER PLATING	.5109-.5124	.5139-.5154	.5159-.5184	.5199-.5214	.5229-.5244	.5259-.5274
PD LEAD THREAD	.5034-.5054	.5064-.5084	.5094-.5114	.5124-.5144	.5154-.5174	.5184-.5204
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.969	AN159513	AN159514	AN159515	AN159516	AN159517	AN159518
2.031	AN159519	AN159520	AN159521	AN159522	AN159523	AN159524
2.094	AN159525	AN159526	AN159527	AN159528	AN159529	AN159530
2.156	AN159531	AN159532	AN159533	AN159534	AN159535	AN159536
2.219	AN159537	AN159538	AN159539	AN159540	AN159541	AN159542
2.281	AN159543	AN159544	AN159545	AN159546	AN159547	AN159548
2.344	AN159549	AN159550	AN159551	AN159552	AN159553	AN159554
2.406	AN159555	AN159556	AN159557	AN159558	AN159559	AN159560
2.469	AN159561	AN159562	AN159563	AN159564	AN159565	AN159566
2.531	AN159567	AN159568	AN159569	AN159570	AN159571	AN159572
2.594	AN159573	AN159574	AN159575	AN159576	AN159577	AN159578
2.719	AN159579	AN159580	AN159581	AN159582	AN159583	AN159584
2.844	AN159585	AN159586	AN159587	AN159588	AN159589	AN159590
2.969	AN159591	AN159592	AN159593	AN159594	AN159595	AN159596
3.094	AN159597	AN159598	AN159599	AN159600	AN159601	AN159602
3.219	AN159603	AN159604	AN159605	AN159606	AN159607	AN159608
3.344	AN159609	AN159610	AN159611	AN159612	AN159613	AN159614
3.469	AN159615	AN159616	AN159617	AN159618	AN159619	AN159620
3.594	AN159621	AN159622	AN159623	AN159624	AN159625	AN159626
3.719	AN159627	AN159628	AN159629	AN159630	AN159631	AN159632
3.844	AN159633	AN159634	AN159635	AN159636	AN159637	AN159638
3.969	AN159639	AN159640	AN159641	AN159642	AN159643	AN159644
4.094	AN159645	AN159646	AN159647	AN159648	AN159649	AN159650
4.219	AN159651	AN159652	AN159653	AN159654	AN159655	AN159656
4.344	AN159657	AN159658	AN159659	AN159660	AN159661	AN159662
4.469	AN159663	AN159664	AN159665	AN159666	AN159667	AN159668
4.594	AN159669	AN159670	AN159671	AN159672	AN159673	AN159674
4.719	AN159675	AN159676	AN159677	AN159678	AN159679	AN159680
4.844	AN159681	AN159682	AN159683	AN159684	AN159685	AN159686
4.969	AN159687	AN159688	AN159689	AN159690	AN159691	AN159692
5.094	AN159693	AN159694	AN159695	AN159696	AN159697	AN159698
5.219	AN159699	AN159700	AN159701	AN159702	AN159703	AN159704
5.344	AN159705	AN159706	AN159707	AN159708	AN159709	AN159710
5.469	AN159711	AN159712	AN159713	AN159714	AN159715	AN159716
5.594	AN159717	AN159718	AN159719	AN159720	AN159721	AN159722

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: ~~STEEL AMS 6322~~ (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

DO NOT USE UNASSIGNED PART NUMBERS.

(3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 14 May 50 REVISED 1 25 Mar 55 2 25 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN159501 THRU AN159800
NONE	STUD-STEPPED, NECKED, 1.5 DIA ENGAGEMENT, .5625-12 x .500-20	

E-25-121

Project 5307-0395

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.