
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN168201 THRU AN168500

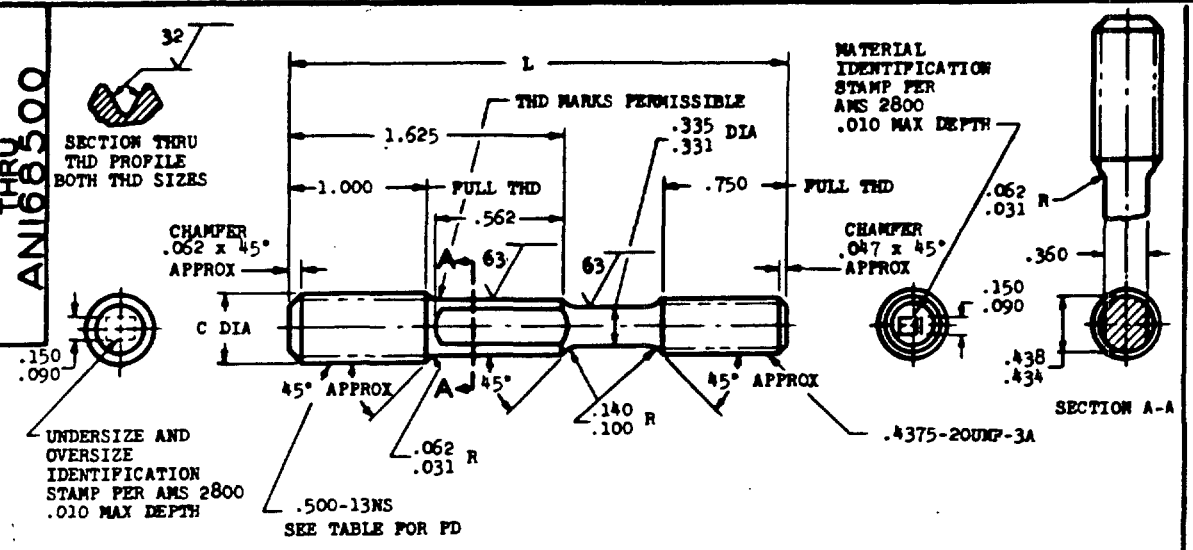

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (2)	+.012 (12)
C	.495- .500	.495- .500	.495- .500	.495- .500	.504- .509	.504- .509
PD BEFORE PLATING	.4518-.4528	.4548-.4558	.4578-.4588	.4508-.4618	.4638-.4648	.4668-.4678
PD AFTER PLATING	.4523-.4538	.4553-.4568	.4583-.4598	.4613-.4628	.4643-.4658	.4673-.4688
PD LEAD THREAD	.4450-.4470	.4480-.4500	.4510-.4530	.4540-.4560	.4570-.4590	.4600-.4620
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.625	AN168213	AN168214	AN168215	AN168216	AN168217	AN168218
2.688	AN168219	AN168220	AN168221	AN168222	AN168223	AN168224
2.750	AN168225	AN168226	AN168227	AN168228	AN168229	AN168230
2.875	AN168231	AN168232	AN168233	AN168234	AN168235	AN168236
3.000	AN168237	AN168238	AN168239	AN168240	AN168241	AN168242
3.125	AN168243	AN168244	AN168245	AN168246	AN168247	AN168248
3.250	AN168249	AN168250	AN168251	AN168252	AN168253	AN168254
3.375	AN168255	AN168256	AN168257	AN168258	AN168259	AN168260
3.500	AN168261	AN168262	AN168263	AN168264	AN168265	AN168266
3.625	AN168267	AN168268	AN168269	AN168270	AN168271	AN168272
3.750	AN168273	AN168274	AN168275	AN168276	AN168277	AN168278
3.875	AN168279	AN168280	AN168281	AN168282	AN168283	AN168284
4.000	AN168285	AN168286	AN168287	AN168288	AN168289	AN168290
4.125	AN168291	AN168292	AN168293	AN168294	AN168295	AN168296
4.250	AN168297	AN168298	AN168299	AN168300	AN168301	AN168302
4.375	AN168303	AN168304	AN168305	AN168306	AN168307	AN168308
4.500	AN168309	AN168310	AN168311	AN168312	AN168313	AN168314
4.625	AN168315	AN168316	AN168317	AN168318	AN168319	AN168320
4.750	AN168321	AN168322	AN168323	AN168324	AN168325	AN168326
4.875	AN168327	AN168328	AN168329	AN168330	AN168331	AN168332
5.000	AN168333	AN168334	AN168335	AN168336	AN168337	AN168338
5.125	AN168339	AN168340	AN168341	AN168342	AN168343	AN168344
5.250	AN168345	AN168346	AN168347	AN168348	AN168349	AN168350
5.375	AN168351	AN168352	AN168353	AN168354	AN168355	AN168356
5.500	AN168357	AN168358	AN168359	AN168360	AN168361	AN168362
5.625	AN168363	AN168364	AN168365	AN168366	AN168367	AN168368
5.750	AN168369	AN168370	AN168371	AN168372	AN168373	AN168374
5.875	AN168375	AN168376	AN168377	AN168378	AN168379	AN168380
6.000	AN168381	AN168382	AN168383	AN168384	AN168385	AN168386
6.125	AN168387	AN168388	AN168389	AN168390	AN168391	AN168392
6.250	AN168393	AN168394	AN168395	AN168396	AN168397	AN168398
6.375	AN168399	AN168400	AN168401	AN168402	AN168403	AN168404
6.500	AN168405	AN168406	AN168407	AN168408	AN168409	AN168410

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

NOTE: This drawing was approved by Joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of commercial supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

DB: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN168201 THRU AN168500
NONE	STUD-STEPPED, HEXED, WRENCH PAD, 2 DIA ENGAGEMENT, .500-13 x .4375-20	

E-25-121 PROJECT 5307-0424

5307

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.