
FED. SUP CLASS
4730

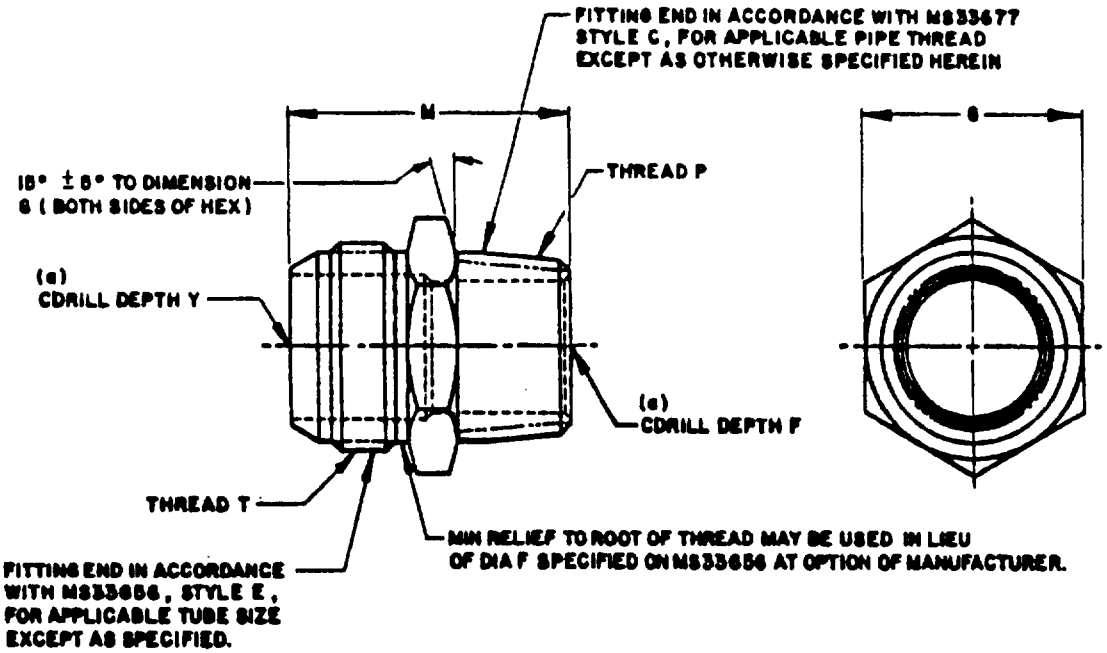

(a) CDRILL IS ONLY FROM THE END OF LARGER DRILL. THE LARGER COUNTERDRILL IS NOT MANDATORY. AT THE OPTION OF THE MANUFACTURER THE SMALLER DIA MAY BE DRILLED THROUGH THE FITTING FROM END TO END.

MATERIAL: STEEL, ALUMINUM ALLOY, COPPER ALLOY, CORROSION RESISTANT STEEL (CRES): BARS.
SEE PROCUREMENT SPECIFICATION

FINISH: SEE PROCUREMENT SPECIFICATION.

NO CODE LETTER IN PART NUMBER FOR CARBON STEEL
ADD B AFTER DASH NUMBER FOR COPPER ALLOY.
ADD D AFTER DASH NUMBER FOR FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J AFTER DASH NUMBER FOR CRES, TYPE 304.
ADD K AFTER DASH NUMBER FOR CRES, TYPE 316.
ADD S AFTER DASH NUMBER FOR CRES, TYPE 347.
ADD W AFTER DASH NUMBER FOR 7075-T73 ALUMINUM ALLOY.

EXAMPLE OF PART NUMBERS:
AN816-4 - ADAPTER, 1/4 TUBING OD TO 1/8 PIPE, CARBON STEEL.
AN816-4B - ADAPTER, 1/4 TUBING OD TO 1/8 PIPE, COPPER ALLOY.
AN816-4D - ADAPTER, 1/4 TUBING OD TO 1/8 PIPE, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN816-8J - ADAPTER, 1/2 TUBING OD TO 3/8 PIPE, CRES, TYPE 304.
AN816-8K - ADAPTER, 1/2 TUBING OD TO 3/8 PIPE, CRES, TYPE 316.
AN816-8S - ADAPTER, 1/2 TUBING OD TO 3/8 PIPE, CRES, TYPE 347.
AN816-8W - ADAPTER, 1/2 TUBING OD TO 3/8 PIPE, 7075-T73 ALUMINUM ALLOY.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1/2°.
CERTAIN PROVISIONS (SCREW THREADS, HEXAGON, AND UNDERCUT DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

INACTIVE FOR DESIGN AFTER 9 JANUARY 1964, EXCEPT FOR USE ON OXYGEN SYSTEMS AND GROUND SERVICE EQUIPMENT. SEE MIL-STD-962 FOR STATUS CRITERIA.

NOTES:
REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.

(13) ENTIRE STANDARD REVISED

APPROVED 13 DEC 40 REVISED (13) 15 APRIL 1988

USER ACTIVITIES:
ARMY-MI, AV
NAVY-AS
DLA-CS

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

REVIEWER ACTIVITIES:
ARMY-MI, AV
NAVY-AS
DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AMSC N/A

P. A.	INTERNATIONAL INTEREST	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN816
AIR FORCE - 82 Other Cost AIR FORCE - 99		ADAPTER, STRAIGHT, PIPE TO TUBE	
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.

DASH NO	TUBING OD	THD P AMPT ±.016	THREAD T (REF) ±.016	F ±.016	G		M ±.016	Y ±.016
-2	1/8	.125	.3125-24UNJF-3A	.469	.438	+.003 -.004	1.016	
-3	3/16		.3750-24UNJF-3A				1.047	
-4	1/4		.4375-20UNJF-3A		.500		1.109	
-4-4		.250		.688	.563	±.004	1.375	
-5	5/16	.125	.5000-20UNJF-3A		.562		1.141	.625
-5-4		.250		.688	.563		1.375	
-6-2	3/8	.125	.5625-18UNJF-3A		.625		1.187	.687
-6		.250					1.375	
-6-6		.375		.688	.750		1.406	
-6-8		.500		.875	.875		1.625	
-7	1/2	.250	.7500-16UNJF-3A		.813		1.500	.844
-8		.375		.688				
-10	5/8	.500	.8750-14UNJF-3A	.906	.938		1.828	
-10-12		.750			1.125	±.005	1.844	
-12-8	3/4	.500	1.0625-12UNJ-3A				1.953	1.062
-12		.750		.906				
-12-16		1.000		1.062	1.375		2.187	
-16-12	1	.750	1.3125-12UNJ-3A				2.031	1.031
-16		1.000		1.125			2.219	
-20	1-1/4	1.250	1.6250-12UNJ-3A	1.187	1.688	±.016	2.359	
-21		1.000					2.328	1.250
-25	1-1/2	1.250	1.8750-12UNJ-3A		2.000		2.547	1.344
-28	1-3/4	1.500	2.2500-12UNJ-3A		2.375	±.020	2.828	1.437
-32	2	2.000	2.5000-12UNJ-3A	1.437	2.625		3.109	

APPROVED 13 DEC 40 REVISED (13) FOR CHANGES SEE PAGES 1 & 2.

(13) ENTIRE STANDARD REVISED

P. A.
AIR FORCE - 82
Other Cust
AIR FORCE - 99

INTERNATIONAL INTEREST

AIR FORCE - NAVY AERONAUTICAL STANDARD

ADAPTER, STRAIGHT, PIPE TO TUBE

AN816

PROCUREMENT SPECIFICATION
MIL-F-5509

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 MAY 51 672-1 (COORDINATED)

Source: https://assist.dla.mil - Downloaded: 2026-10-20T14:16Z
Check the source to verify that this is the current version before use.