

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


NOTE: This drawing was approved by joint action of the War and Navy Departments as the Army-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.




STYLE A




STYLE B




STYLE C

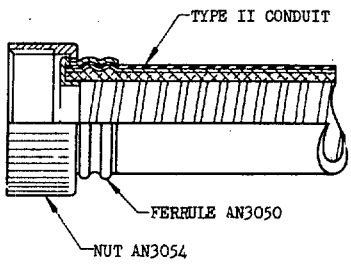

STYLE D



STYLE E



STYLE F

CONDUIT ID	END STYLE	FERRULE AN PART NO.	NUT AN PART NO.	NUT THREAD REF
3/16	A	AN3050-3	AN3054-3	1/2-28
	B	AN3051-3	AN3054-4	5/8-24
	D	AN3050-3	AN3054-3	1/2-28
	E	AN3051-3	AN3054-4	5/8-24
1/4	A	AN3050-4	AN3054-4	5/8-24
	B	AN3051-4	AN3054-6	3/4-20
	C	AN3052-4	AN3054-8	7/8-20
	D	AN3050-4	AN3054-4	5/8-24
	E	AN3051-4	AN3054-6	3/4-20
	F	AN3052-4	AN3054-8	7/8-20
3/8	A	AN3050-6	AN3054-6	3/4-20
	B	AN3051-6	AN3054-8	7/8-20
	C	AN3052-6	AN3054-10	1 -20
	D	AN3050-6	AN3054-6	3/4-20
	E	AN3051-6	AN3054-8	7/8-20
	F	AN3052-6	AN3054-10	1 -20
1/2	A	AN3050-8	AN3054-8	7/8-20
	B	AN3051-8	AN3054-10	1 -20
	C	AN3052-8	AN3054-12	1-3/16-18
	D	AN3050-8	AN3054-8	7/8 -20

CONDUIT ID	END STYLE	FERRULE AN PART NO.	NUT AN PART NO.	NUT THREAD REF
1/2	E	AN3051-8	AN3054-10	1 -20
	F	AN3052-8	AN3054-12	1-3/16-18
5/8	A	AN3050-10	AN3054-10	1 -20
	B	AN3051-10	AN3054-12	1-3/16-18
	C	AN3052-10	AN3054-16	1-7/16-18
	D	AN3050-10	AN3054-10	1 -20
	E	AN3051-10	AN3054-12	1-3/16-18
	F	AN3052-10	AN3054-16	1-7/16-18
3/4	A	AN3050-12	AN3054-12	1-3/16-18
	B	AN3051-12	AN3054-16	1-7/16-18
	C	AN3052-12	AN3054-20	1-3/4 -18
	D	AN3050-12	AN3054-12	1-3/16-18
	E	AN3051-12	AN3054-16	1-7/16-18
	F	AN3052-12	AN3054-20	1-3/4 -18
1	A	AN3050-16	AN3054-16	1-7/16-18
	B	AN3051-16	AN3054-20	1-3/4 -18
	C	AN3052-16	AN3054-24	2 -18
	E	AN3048-16	AN3054-20	1-3/4 -18

CONDUIT ID	END STYLE	FERRULE AN PART NO.	NUT AN PART NO.	NUT THREAD REF
1-1/4	A	AN3050-20	AN3054-20	1-3/4-18
	B	AN3051-20	AN3054-24	2 -18
	C	AN3052-20	AN3054-28	2-1/4-16
	E	AN3048-20	AN3054-24	2 -18
1-1/2	A	AN3050-24	AN3054-24	2 -18
	B	AN3051-24	AN3054-28	2-1/4-16
	C	AN3052-24	AN3054-32	2-1/2-16
	E	AN3048-24	AN3054-28	2-1/4-16
1-3/4	A	AN3050-28	AN3054-28	2-1/4-16
	B	AN3051-28	AN3054-32	2-1/2-16
	C	AN3052-28	AN3054-40	3 -16
	E	AN3048-28	AN3054-32	2-1/2-16
2	A	AN3050-32	AN3054-32	2-1/2-16
	B	AN3051-32	AN3054-40	3 -16
	E	AN3048-32	AN3054-40	3 -16
2-1/2	A	AN3050-40	AN3054-40	3 -16

CONDUIT IN ACCORDANCE WITH SPECIFICATION AN-WW-C-561.

IDENTICAL TYPE ENDS OR ANY COMBINATION OF TYPES MAY BE USED.

FERRULES SHALL BE ATTACHED TO CONDUIT BY SWAGING AND SHALL WITHSTAND 50 LB TEST LOAD.

DIMENSIONS IN INCHES.

APPROVED 23 Jan 47 REVISED

ARMY-NAVY AERONAUTICAL DESIGN STANDARD

CONDUIT ASSEMBLY – FLEXIBLE METALLIC

AND10391

NOT A PART NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.