
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP. CLASS
6240

This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, types TS-21 and TS-48. The item covered hereon is standard for use in the design of new equipment procured by the Bureau of Ships.

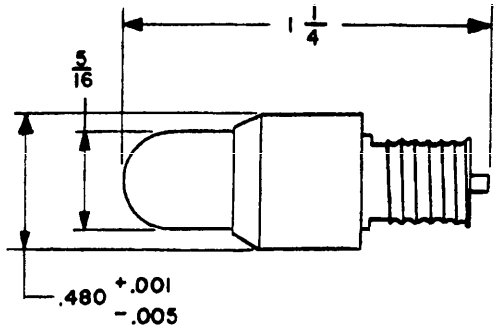

MS part number	Type	FIIN
MS15583-1	TS-21	153-8713
MS15583-2	TS-48	153-8929

Characteristic	Type TS-21	Type TS-48
Amperes	0.25	0.40
Volts	10	6
Bulb	T-2-1/2	T-2-1/2
Finish	Clear	Clear
Base	Special screw	Special screw
Filaments	C-2	C-2
Overall length (maximum inches)	1-1/4	1-1/4
Hours life (approximate)	1500	1000
Use	Ordnance Mk. 1 sight light sperry Mk. I, II, III, S.S. A. Telescope Arma, Mk. III repeater panel	Ordnance Mk. II sight light

APPROVED 10 AUG. 1954 REVISED

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS15583
Ships	A - N - AF -	LAMP, INCANDESCENT, T-2-1/2, SPECIAL SCREW	(SHIPS)
Procurement Specification		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672
1 OCT 52

A10304

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:49Z
Check the source to verify that this is the current version before use.