CE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


CUSTODIAN
Navy - Bureau
Air Force

DEPARTMENT OF DEFENSE SPECIFICATION

MILITARY STANDARD

VALVE - HYDRAULIC, DIRECTIONAL CONTROL, SLIDE SELECTOR

MS28881

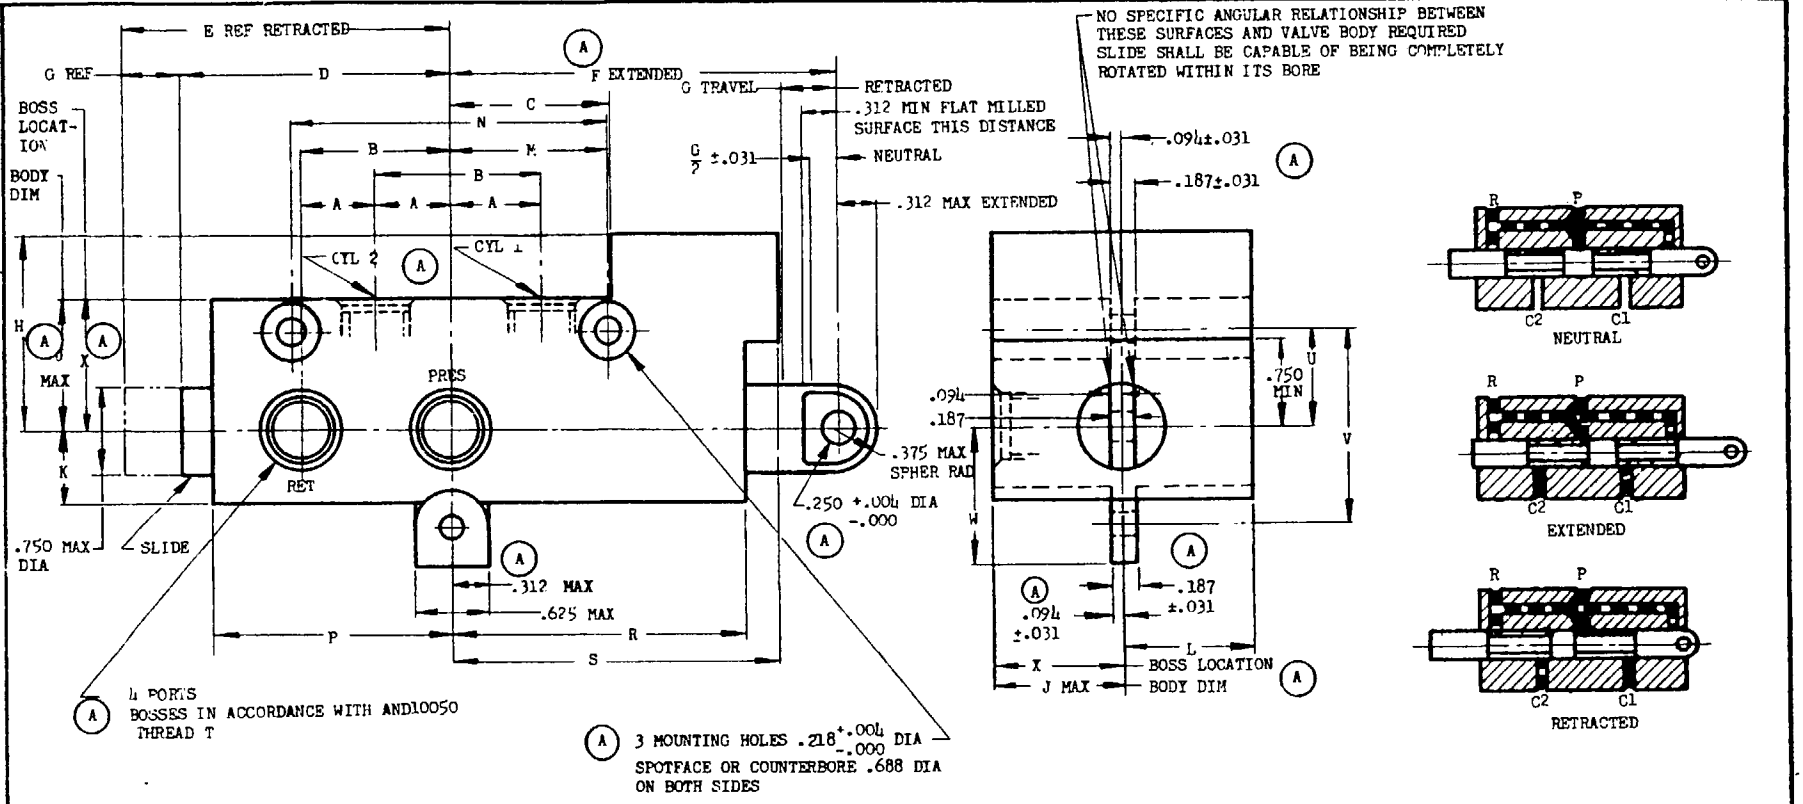

MS PART NO.	TUBE SIZE	THREAD T	A ±.031	B ±.031	C MIN	D MAX	E MAX	F ±.031	G ±.031	H MAX	(A) J MAX	K MAX	L MAX	M	N	P MAX	R MAX	S MAX	U	V	W MAX	X ±.031
MS28881-4	1/4	7/16-20 NF-3	.656	1.312	1.375	2.312	2.812	3.375	.500	1.688	1.300	.625	1.125	1.375	2.750	2.062	2.562	2.875	.844	1.687	1.188	1.300
MS28881-6	3/8	9/16-18 NF-3	.750	1.500	1.625	2.375	3.125	3.875	.750	1.688	1.325	.688	1.125	1.562	3.125	2.250	2.812	3.125	.875	1.750	1.188	1.325
MS28881-8	1/2	3/4 -16 NF-3	.938	1.875	2.125	2.625	3.375	4.375	.750	1.688	1.500	.875	1.625	1.812	3.625	2.625	3.312	3.625	1.062	2.125	1.375	1.500
MS28881-12	3/4	1-1/16-12 N -3	1.219	2.438	-	3.312	4.062	5.125	.750	1.812	1.812	1.188	1.875	2.375	4.750	3.312	4.062	4.375	1.312	2.625	1.625	1.812

THERE SHALL BE NO FREE FLOW FROM PRESSURE TO RETURN IN ANY INTERMEDIATE POSITION.
IN MOVEMENT FROM NEUTRAL TO EXTENDED, PORT P SHALL NOT OPEN TO C2 BEFORE C1 OPENS TO R.
IN MOVEMENT FROM NEUTRAL TO RETRACTED, PORT P SHALL NOT OPEN TO C1 BEFORE C2 OPENS TO R.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.

FED. SUP CLASS. 1820

APPROVED 15 Apr 52 REVISED (A) 22 Dec 53

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.