INCH-POUND

MS27595E
w/AMENDMENT 1
23 December 2019
SUPERSEDING
MS27595E
25 January 2006

DETAIL SPECIFICATION SHEET

RETAINER, PACKING BACKUP, CONTINUOUS RING, POLYTETRAFLUOROETHYLENE

Inactive for new design after 18 July 1997

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist this specification sheet and SAE-AS8791.

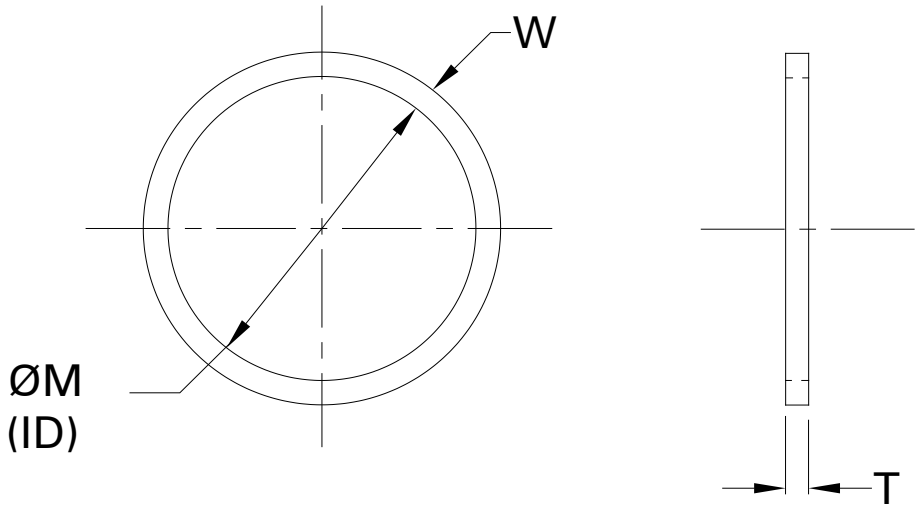


FIGURE 1. Retainer

AMSC N/A

FSC 5330

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.

TABLE I. Retainer Part Number and Dimensions

PART NO.	ØM (ID)		T	W
MS27595-004	.080			
MS27595-005	.111			
MS27595-006	.125			
MS27595-007	.156			
MS27595-008	.187			
MS27595-009	.219			
MS27595-010	.250	±.001	.050	.055
MS27595-011	.312			
MS27595-012	.375		±.002	±.001
MS27595-013	.440			
MS27595-014	.503			
MS27595-015	.565			
MS27595-016	.628			
MS27595-017	.690			
MS27595-018	.753			
MS27595-019	.815			
MS27595-020	.881			
MS27595-021	.943			
MS27595-022	1.006			
MS27595-023	1.068			
MS27595-024	1.131	±.002		
MS27595-025	1.193			
MS27595-026	1.256			
MS27595-027	1.318			
MS27595-028	1.381			
MS27595-110	.374			
MS27595-111	.437			
MS27595-112	.499			
MS27595-113	.562			
MS27595-114	.624			
MS27595-115	.687	±.001		
MS27595-116	.749			
MS27595-117	.815			
MS27595-118	.877			
MS27595-119	.940		.050	.088
MS27595-120	1.002			
MS27595-121	1.065		±.002	±.001
MS27595-122	1.127			
MS27595-123	1.190			
MS27595-124	1.252	±.002		
MS27595-125	1.315			
MS27595-126	1.377			
MS27595-127	1.440			
MS27595-128	1.502			

PART NO.	ØM (ID)		T	W
MS27595-129	1.565			
MS27595-130	1.629			
MS27595-131	1.691			
MS27595-132	1.754			
MS27595-133	1.816			
MS27595-134	1.879			
MS27595-135	1.942			
MS27595-136	2.004			
MS27595-137	2.067			
MS27595-138	2.129		.050	.088
MS27595-139	2.192	±.002		
MS27595-140	2.254		±.002	±.001
MS27595-141	2.317			
MS27595-142	2.379			
MS27595-143	2.442			
MS27595-144	2.504			
MS27595-145	2.567			
MS27595-146	2.629			
MS27595-147	2.692			
MS27595-148	2.754			
MS27595-149	2.817			
MS27595-210	.753			
MS27595-211	.815	±.001		
MS27595-212	.878			
MS27595-213	.940			
MS27595-214	1.003			
MS27595-215	1.065			
MS27595-216	1.128			
MS27595-217	1.190			
MS27595-218	1.253			
MS27595-219	1.315			
MS27595-220	1.378			
MS27595-221	1.440			
MS27595-222	1.503	±.002		
MS27595-223	1.629		.050	.119
MS27595-224	1.754			
MS27595-225	1.880			
MS27595-226	2.005		±.002	±.001
MS27595-227	2.130			
MS27595-228	2.255			
MS27595-229	2.380			
MS27595-230	2.505			
MS27595-231	2.630			
MS27595-232	2.755			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.

TABLE I. Retainer Part Number and Dimensions-continued

PART NO.	ØM (ID)		T	W
MS27595-233	2.880			
MS27595-234	3.005			
MS27595-235	3.130			
MS27595-236	3.255			
MS27595-237	3.380			
MS27595-238	3.505			
MS27595-239	3.630	±.002	.050 ±.002	.119 ±.001
MS27595-240	3.755			
MS27595-241	3.880			
MS27595-242	4.005			
MS27595-243	4.130			
MS27595-244	4.255			
MS27595-245	4.380			
MS27595-246	4.505			
MS27595-247	4.630			
MS27595-325	1.497			
MS27595-326	1.622			
MS27595-327	1.748			
MS27595-328	1.873			
MS27595-329	1.998			
MS27595-330	2.123			
MS27595-331	2.248			
MS27595-332	2.373			
MS27595-333	2.498			
MS27595-334	2.623		.073	.185
MS27595-335	2.748	±.002		
MS27595-336	2.873		±.002	±.001
MS27595-337	2.998			
MS27595-338	3.123			
MS27595-339	3.248			
MS27595-340	3.373			
MS27595-341	3.498			
MS27595-342	3.623			
MS27595-343	3.748			
MS27595-344	3.873			
MS27595-345	3.998			
MS27595-346	4.123			

PART NO.	ØM (ID)		T	W
MS27595-347	4.248		.073 ±.002	.185 ±.001
MS27595-348	4.373			
MS27595-349	4.498			
MS27595-425	4.502			
MS27595-426	4.627			
MS27595-427	4.752			
MS27595-428	4.877			
MS27595-429	5.002			
MS27595-430	5.127			
MS27595-431	5.252			
MS27595-432	5.377			
MS27595-433	5.502	±.002		
MS27595-434	5.627			
MS27595-435	5.752			
MS27595-436	5.877			
MS27595-437	6.002			
MS27595-438	6.252			
MS27595-439	6.502			
MS27595-440	6.752			
MS27595-441	7.002		.108 ±.002	.236 ±.001
MS27595-442	7.252			
MS27595-443	7.502			
MS27595-444	7.752			
MS27595-445	8.002			
MS27595-446	8.502			
MS27595-447	9.002			
MS27595-448	9.502	±.003		
MS27595-449	10.002			
MS27595-450	10.502			
MS27595-451	11.002			
MS27595-452	11.502			
MS27595-453	12.002	±.004		
MS27595-454	12.502			
MS27595-455	13.002			
MS27595-456	13.502			
MS27595-457	14.002			
MS27595-458	14.502	±.005		
MS27595-459	15.002			
MS27595-460	15.502			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.

NOTES:

1. SURFACES MUST BE SMOOTH AND FREE FROM IRREGULARITIES. EDGES MUST BE CLEAN AND SHARP.

2. DIMENSIONS IN INCHES.

3. FOR USE IN PACKING GROOVES CONFORMING TO SPECIFICATION MIL-G-5514, EXCEPT NOT FOR USE IN O.D. (PISTON) APPLICATIONS USING MIL-G-5514 A & B GLANDS.

4. FOR SINGLE TURN RING (CUT) SEE MS28774.

5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

6. CHANGES FROM PREVIOUS ISSUE. THE MARGINS OF THIS SPECIFICATION ARE MARKED WITH VERTICAL LINES TO INDICATE WHERE CHANGES FROM THE PREVIOUS ISSUE WERE MADE. THIS WAS DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.

Custodians:
Army – MR
Navy – AS
Air Force – 20

Preparing activity:
DLA – IS

(Project 5330-2020-001)

Review Activities:
Army – AV, MI
Navy – SA, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.