INCH-POUND

A-A-52506E
31 March 2023
SUPERSEDING
A-A-52506D
13 September 2021

COMMERCIAL ITEM DESCRIPTION

CLAMPS, HOSE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE.

1.1 Scope. This commercial item description (CID) covers metal hose clamps that are used for holding flexible ducts, or hose on to a male fitting. These hose clamps are generally used on coolant, fuel, oil, vacuum, and emission systems. The selection of type and size of hose clamps for a specific application involves factors, such as torque, vibration, and pressure requirements (see 7.4).

2. CLASSIFICATION

2.1 Classification. Hose clamps are classified by types as specified in SAE J1508 and illustrated in figure 2 for ease of reference. The type and size of hose clamps are predicated on application requirements. Refer to SAE J1508 for availability of size for each type of hose clamps (see 7.2).

3. SALIENT CHARACTERISTICS

3.1 Material. Unless otherwise specified herein, hose clamp materials and finishes, including screws and other hardware, shall be as specified in SAE J1508. The use of recovered material made in compliance with regulatory requirements is acceptable providing that all requirements of this CID are met (see 7.5).

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to U.S. Army Ground Vehicle Systems Center, ATTN: FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Detroit Arsenal, MI 48397-5000 or emailed to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST online database at https://assist.dla.mil/.

FSC 4730


Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

3.1.1 Finish. Zinc with hexavalent chromium free passivation per ASTM F1941/F1941M Fe/Zn 5ANS or 5AN.

3.2 Design, construction, and performance. Unless otherwise specified herein, the clamp design, construction, and performance of hose clamps shall be in accordance with SAE J1508, except the use of hexavalent chromium containing compounds is prohibited. Clamp component parts shall remain as an assembly during installation and removal of the clamp.

3.2.1 Band length. The maximum overlap band length at the maximum of the hose diameter for type F, I, and M clamps shall be as specified in Figure 1 and shall be verified when subjected to salient characteristics. Metric measurements are noted in parenthesis (millimeter).

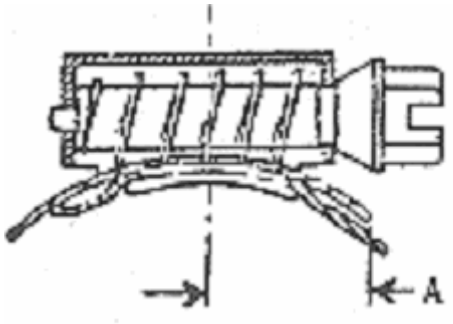

Clamp Type	A Dimension (mm)
F	0.75 (19)
I	0.50 (13)
M	0.44 (11)

FIGURE 1. Band length.

3.2.2 Clamping diameter verification. To verify the clamping diameter, the hose clamps shall be assembled over and closed tight upon round mandrels of diameters equal to the corresponding open and closed diameters specified in the dimensional tables in SAE J1508. Diameters smaller than closed diameters specified in SAE J1508 are allowable. Hose clamps shall meet the open diameter required with all threads engaged.

3.2.3 Torque. The hose clamp torque requirements shall conform to SAE J1508 for the appropriate type and size required.

3.2.4 Sealing capability. SAE J1610 shall be used to evaluate the pressure, vibration, and temperature (PVT) sealing capabilities of type F hose clamps.

3.3 Identification and marking. Unless otherwise specified (see 7.2), the hose clamps shall be identified or marked in a legible and permanent manner with the type, size, and manufacturer's name or trademark. When required (see 7.2), the marking on small clamp sizes shall be placed on the outside of the box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. The contractor is responsible for meeting all of the performance and acceptance requirements outlined in section 13 of SAE J1508.

5. PRODUCT CONFORMANCE PROVISIONS. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Source of documents.

7.1.1 ASTM documents. Copies of ASTM F1941/F1941M "Standard Specification for Electrodeposited Coatings on Mechanical Fasteners, Inch and Metric" are available from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959 or on their website at https://www.astm.org.

7.1.2 SAE documents. Copies of SAE J1508 "Hose Clamp Specifications" and SAE J1610 "Test Method for Evaluating the Sealing Capability of Hose Connections with a PVT Test Facility" are available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001 or on their website at https://www.sae.org.

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Hose clamp type and size in accordance with SAE J1508.
c. Selection of applicable level and packaging requirements.
d. If hose clamp marking is required.
e. Small clamps, marking is acceptable on the box only.

7.3 Cross reference data. Hose clamp types and sizes conforming to this CID are direct replacements for hose clamp types and sizes conforming to WW-C-440B and MS35842E, as shown in table II. MS35842E part numbers are cross referenced to the SAE sizes for type F hose clamps. WW-C-440B hose clamp types are cross referenced to the corresponding types of clamps available in SAE J1508. Hose clamp style TB and SLTB, which were not available on either MS35842E or WW-C-440B, are now available in this CID.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

TABLE II. Cross reference data.


SAE J1508/CID A-A-52506 Hose clamp type(s)	Superseded WW-C-440B Hose clamp type(s)
A, AHH & SLA	A
B	B
C	C
D	D
E, CTB, CTW	E
F, FE, FEO, HD, I, M, MX, SLF, SLHD & T	F, MS35842E
NOT APPLICABLE (N/A)	G
N/A	H
TB, SLTB	N/A

7.4 Clamp types. The clamp types shown in figure 2 are for illustration purposes only. Refer to SAE J1508 for a more accurate depiction of the hose clamp types.

7.5 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent possible. Copies of Public Law 94-580 are available online at https://www.congress.gov/94/statute/STATUTE-90/STATUTE-90-Pg2795.pdf.

7.6 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PIN to be used for a hose clamp using this CID, and associated federal specification sheets will be indicated in each federal specification sheet.

The PIN used for a hose clamp only using this CID is generated as follows: Hose clamps conforming to this CID are interchangeable with hose clamps conforming to SAE J1508.

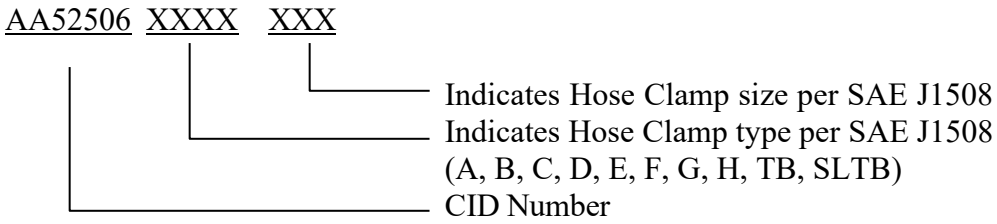

Example: AA52506F296 = An “F” type hose clamp that is SAE J1508 size 296.

7.7 Changes from previous issue. The margins of this CID are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.



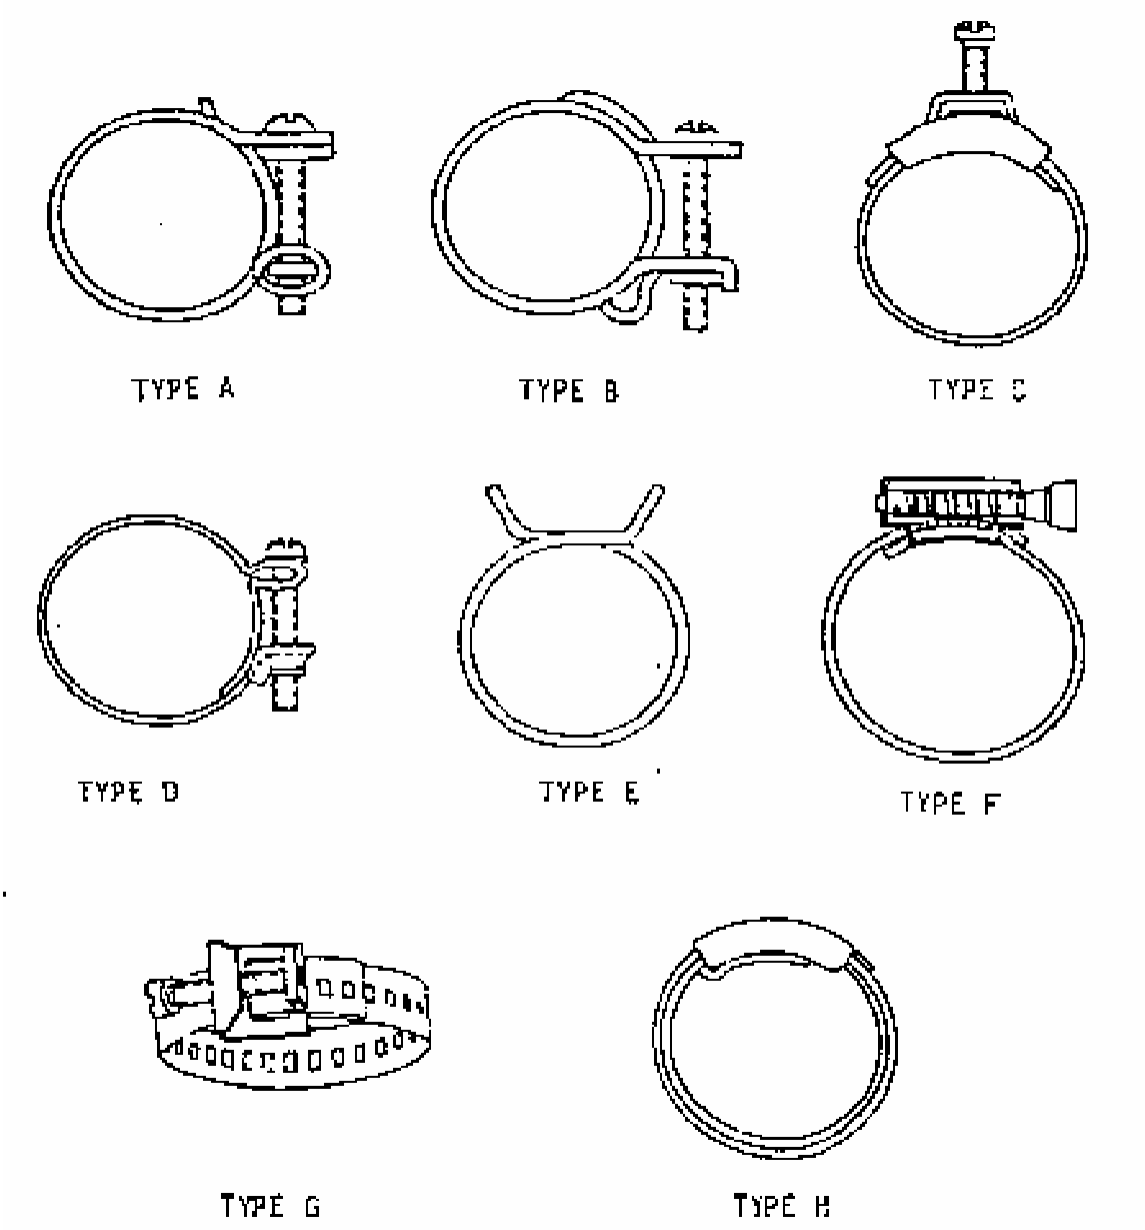


FIGURE 2. Referenced clamp types.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

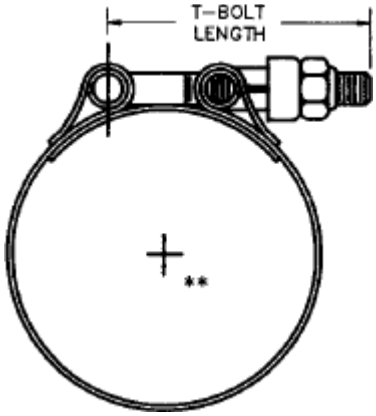

Type TB

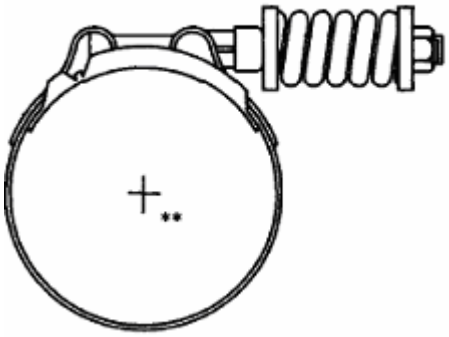

Type SLTB

FIGURE 2. Referenced clamp types (Continued).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

CIVIL AGENCY COORDINATION ACTIVITY:
GSA - FSS
HSS - FEC
NASA - NA

Custodians:
Army - AT
Navy - YD
Air Force - 84

Preparing Activity:
Army - AT

(Project 4730-2023-041)

Review Activities:
Army - AR, AV, MI
Navy - AS, SH
Air Force - 11
DLA - CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.