MILITARY STANDARD

MIL-STD-1322-63
(NAVY)

10 APRIL 1987


UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT
BATTERY, MERCURY MK 131 OR
BATTERY, MERCURY MK 132
IN CONTAINER DWG 3268750

UNIT LOAD DATA	BATTERY	MK 131	MK 132
	DODIC/NALC NO.	WW70	WW71


NUMBER OF BATTERIES PER CONTAINER..... 2
NUMBER OF CONTAINERS PER UNIT LOAD..... 60
GROSS WEIGHT OF ONE CONTAINER..... 28 LBS
WEIGHT OF PALLET..... 90 LBS
WEIGHT OF WOODEN DUNNAGE..... 132 LBS
WEIGHT OF STRAPPING..... 10 LBS
GROSS WEIGHT OF UNIT LOAD..... 1912 LBS△
CUBE..... 49.2 CU FT

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
5 UNIT LOADS HIGH IN STORAGE

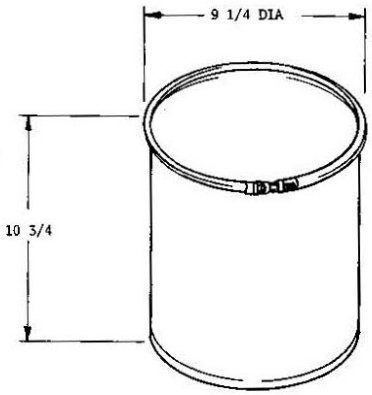

SHIPPING(PACKING) CONDITION
10001-3269034

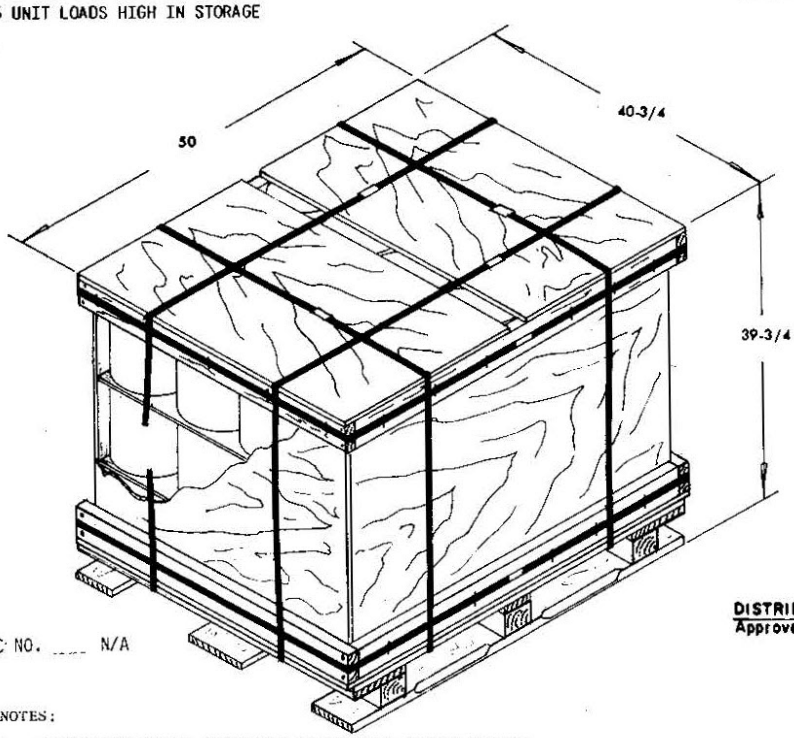

AMSC NO. ____ N/A

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-256 (NAVY).

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322 (NAVY)

W.S. Gray WPNSTA EARLE 4/9/87
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly WPNSTA EARLE 4/10/87
SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR William C. Schroeder 4/10/87
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-02-26 10:14:42
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD STRAPPING, ITEM 9, THROUGH SLOTS IN PALLET DECK AS SHOWN IN DETAIL A.

(B) PLACE THE PREFABRICATED BOTTOM ADAPTER WITH GIRTHWISE STRAPPING, ITEM 10, ON PALLET.

(C) POSITION 20 CONTAINERS IN ADAPTER AS SHOWN IN PLAN VIEW. PLACE SEPARATOR SHEET, ITEM 7, OVER FIRST LAYER OF CONTAINERS, ADD ANOTHER LAYER AND SHEET AND THEN THE FINAL (3RD) LAYER OF 20 CONTAINERS.


(D) POSITION SIDE AND END COVER PLATES, ITEM 5 AND 6, INSIDE BOTTOM ADAPTER, PLACE THE TOP ADAPTER ASSEMBLY OVER CONTAINERS AND COVER PLATES, AS SHOWN.

(E) POSITION STRAPPING, ITEM 8 UNDER PALLET DECK AND AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL, ITEM 11.


(F) POSITION STRAPPING, ITEM 9, AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL.

(G) SECURE STRAPPING TO ADAPTERS WITH STAPLES, ITEM 12, AS SHOWN.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1222.



DETAIL A

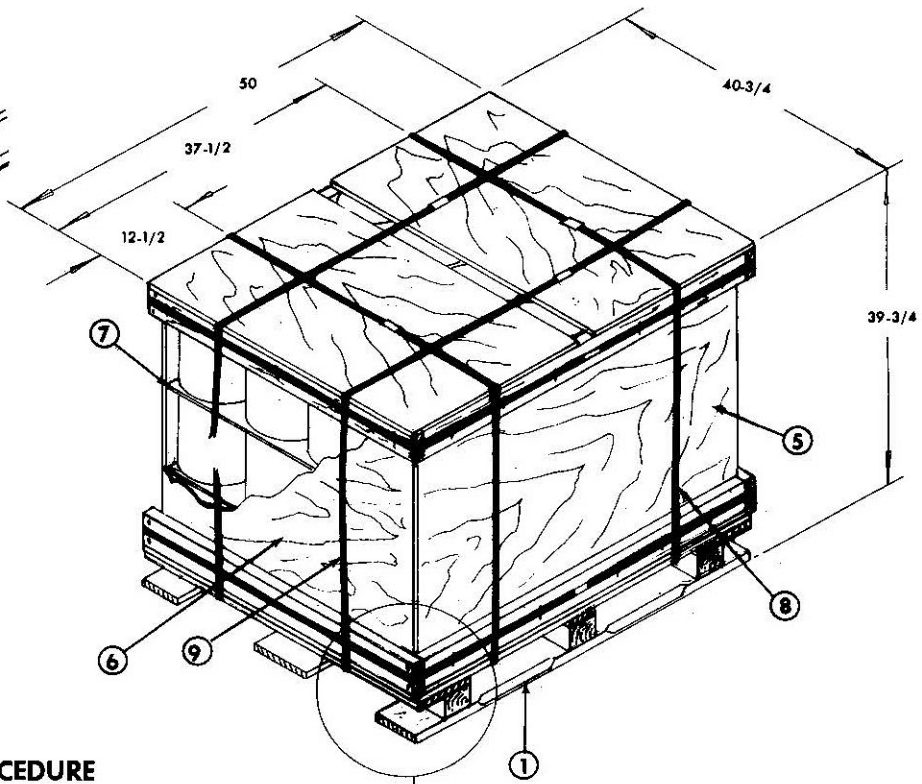

DEPALLETIZING PROCEDURE


(A) CUT AND REMOVE STRAPPING, ITEM 8 AND 9 ONLY.

(B) REMOVE TOP ADAPTER.

(C) REMOVE CONTAINERS AND SEPARATOR SHEETS.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:44Z
Check the source to verify that this is the current record before use.

ADAPTER DETAIL
TOP OR BOTTOM ADAPTER

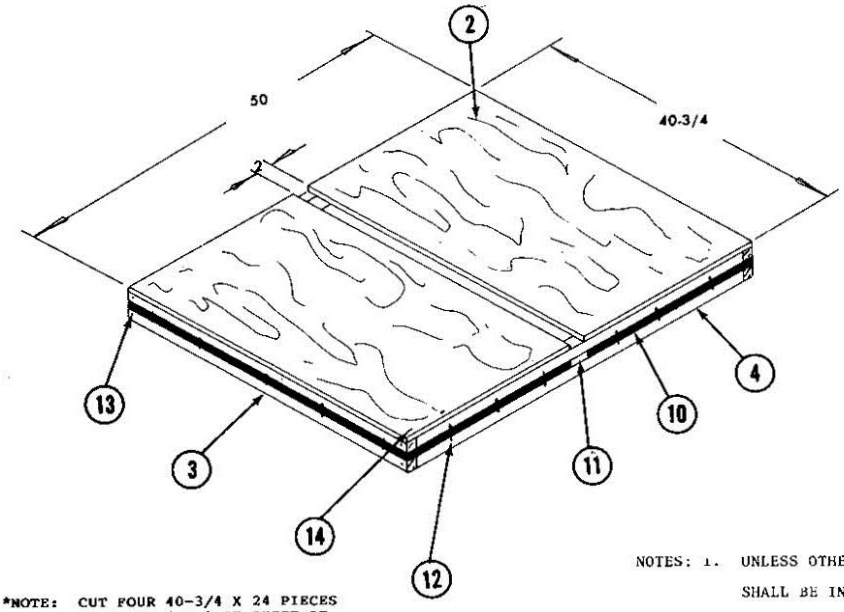

*NOTE: CUT FOUR 40-3/4 X 24 PIECES FROM ONE 4 X 8 FT SHEET OF 3/4 PLYWOOD LEAVING 2 INCH GAP IN CENTER.

NOTES: 1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1522.
2. DO NOT USE TYPE I STRAPPING WITH POWER TOOLS.



PLAN VIEW

20 CONTAINERS/LAYER
5 LAYERS HIGH WITH PLYWOOD SEPARATOR SHEETS (2 REQ'D) BETWEEN LAYERS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1 EVERY 6*	14	NAILS, COMMON	SEE NOTE 1	10d
2 PER JOINT	13	NAILS, BOX	SEE NOTE 1	16d
AS REQ'D	12	STAPLE	SEE NOTES 1 & 2	3/4
6	11	SEAL	SEE NOTES 1 & 2	3/4
2	10	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 16 FT
2	9	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 15 FT
2	8	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 13 FT 6
2	7	SEPARATOR SHEET	PLYWOOD	1/4 X 46-1/4 X 37
2	6	COVER PLATE	PLYWOOD	1/4 X 37-1/4 X 32-3/4
2	5	COVER PLATE	PLYWOOD	1/4 X 47 X 32-3/4
4	4	ADAPTER, FRAME	WOOD	2 X 4 X 47
4	3	ADAPTER, FRAME	WOOD	2 X 4 X 40-3/4
4	2	ADAPTER, TOP OR BOTTOM	PLYWOOD	3/4 X 40-3/4 X 24 *
1	1	PALLET	MIL-P-15011 STYLE 1, CL1	40 x 48 x 5-1/2

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-0282)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:44Z
Check the source to verify that this is the current version before use.