MILITARY STANDARD

UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT
TARGET DETECTING DEVICE MK 58 MOD 0
IN CONTAINER DWG 3268734

MIL-STD-1322-66
(NAVY)


25 SEPTEMBER 1985

UNIT LOAD DATA DODIC/NALC NO.


NUMBER OF DETECTORS PER CONTAINER	1
NUMBER OF CONTAINERS PER UNIT LOAD	36
GROSS WEIGHT OF ONE CONTAINER	27.5 LBS
WEIGHT OF PALLET	75 LBS
WEIGHT OF WOODEN DUNNAGE	95 LBS
WEIGHT OF STRAPPING	9 LBS
GROSS WEIGHT OF UNIT LOAD	1169 LBS △
CUBE	48.1 CU.FT.

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
4 UNIT LOADS HIGH IN STORAGE

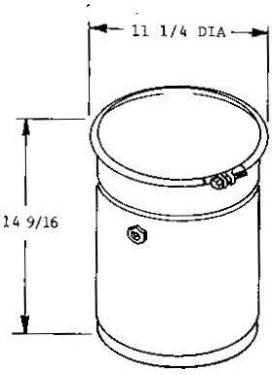

SHIPPING (PACKING) CONDITION
53711 - 3268734

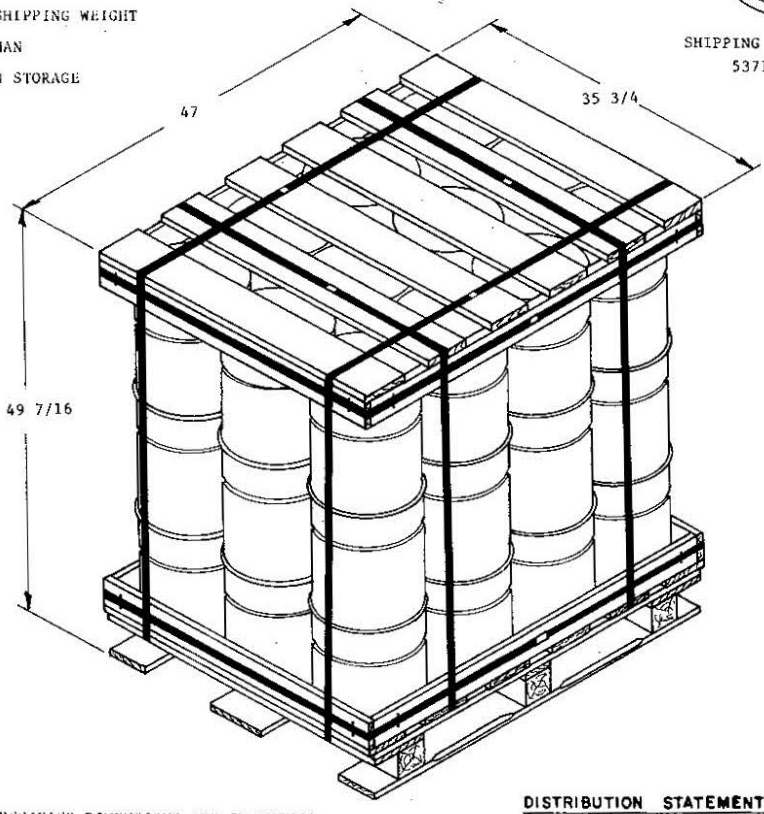

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY).

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

M S Gray NWHC 4/9/85
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

SIGNATURE SEASYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322 (NAVY)

ORIGINATOR 10 Apr 1985
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:44Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD STRAPPING, ITEM 6, THROUGH SLOTS ON PALLET DECK, AS SHOWN IN DETAIL A.

(B) PLACE THE PREFABRICATED BOTTOM ADAPTER WITH GIRTHWISE STRAPPING, ITEM 7 ON PALLET.

(C) POSITION 12 CONTAINERS IN ADAPTER AS SHOWN IN PLAN VIEW. ADD ANOTHER LAYER AND THEN THE FINAL (3RD) LAYER OF 12 CONTAINERS.


(D) PLACE THE TOP ADAPTER ASSEMBLY OVER CONTAINERS AND COVER PLATES, AS SHOWN.

(E) POSITION STRAPPING, ITEM 5, UNDER PALLET DECK AND AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL, ITEM 8.


(F) POSITION STRAPPING, ITEM 6 AROUND THE UNIT LOAD , TENSION AND DOUBLE NOTCH SEAL.

(G) SECURE STRAPPING TO ADAPTERS WITH STAPLES, ITEM 9, AS SHOWN.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1522.



DETAIL A

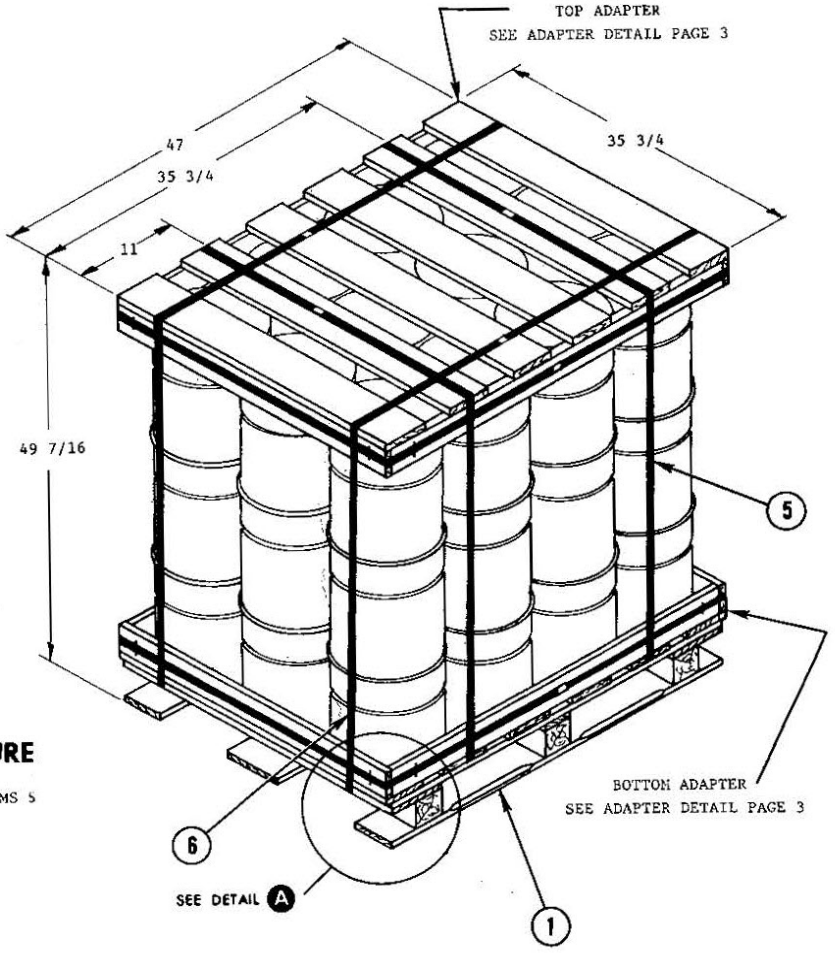

DEPALLETIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING, ITEMS 5 AND 6 ONLY.


(B) REMOVE TOP ADAPTER.


(C) REMOVE CONTAINERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:44Z
Check the source to verify that this is the current version before use.

ADAPTER DETAIL

TOP OR BOTTOM ADAPTER

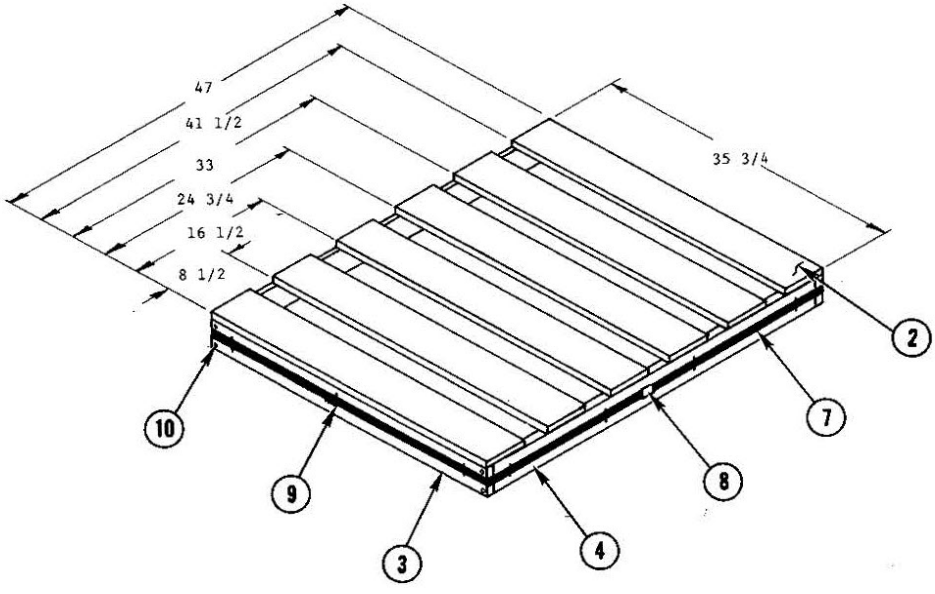

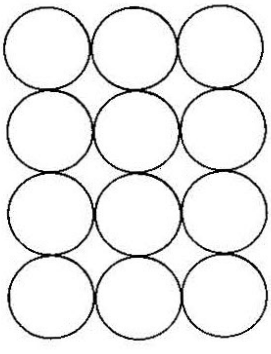

PLAN VIEW

12 CONTAINERS/LAYER
3 LAYERS HIGH

NOTES: 1. ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1322
2. DO NOT USE TYPE I STRAPPING WITH POWER TOOLS.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
AS REQ'D	10	NAILS, BOX	FF-N-105	8d
AS REQ'D	9	STAPLE	SEE NOTES 1 & 2	3/4
6	8	SEAL	SEE NOTES 1 & 2	3/4
2	7	STRAPPING	SEE NOTES 1 & 2	16 FT
2	6	STRAPPING	SEE NOTES 1 & 2	17 FT
2	5	STRAPPING	SEE NOTES 1 & 2	15 FT 6
4	4	ADAPTER, FRAME	WOOD	1 X 4 X 45 1/2
4	3	ADAPTER, FRAME	WOOD	1 X 4 X 35 3/4
12	2	ADAPTER, SLAT	WOOD	1 X 6 X 35 3/4
1	1	PALLET, WOOD	MIL-P-15011 STYLE 1A, CL2	35 X 45 1/2 X 5 1/2

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:44Z
Check the source to verify that this is the current version before use.