INCH-POUND

MIL-F-81836/4A(AS)
27 MARCH 1992
SUPERSEDING
MIL-F-81826/4(AS)
18 February 1972

MILITARY SPECIFICATION SHEET

FILTER ELEMENT, DISPOSABLE, FLUID, PRESSURE HYDRAULIC, 5000 PSI, 3 MICRON ABSOLUTE

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-81836(AS)


Notes:

1. Material: See procurement specification.
2. Element for use in M81836/1, M81836/2 or M81836/3 filter assembly.
3. Dimensions in inches unless otherwise specified.
   Tolerances: Decimals ±.010, angles ±1°.

AMSC N/A FSC 4920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

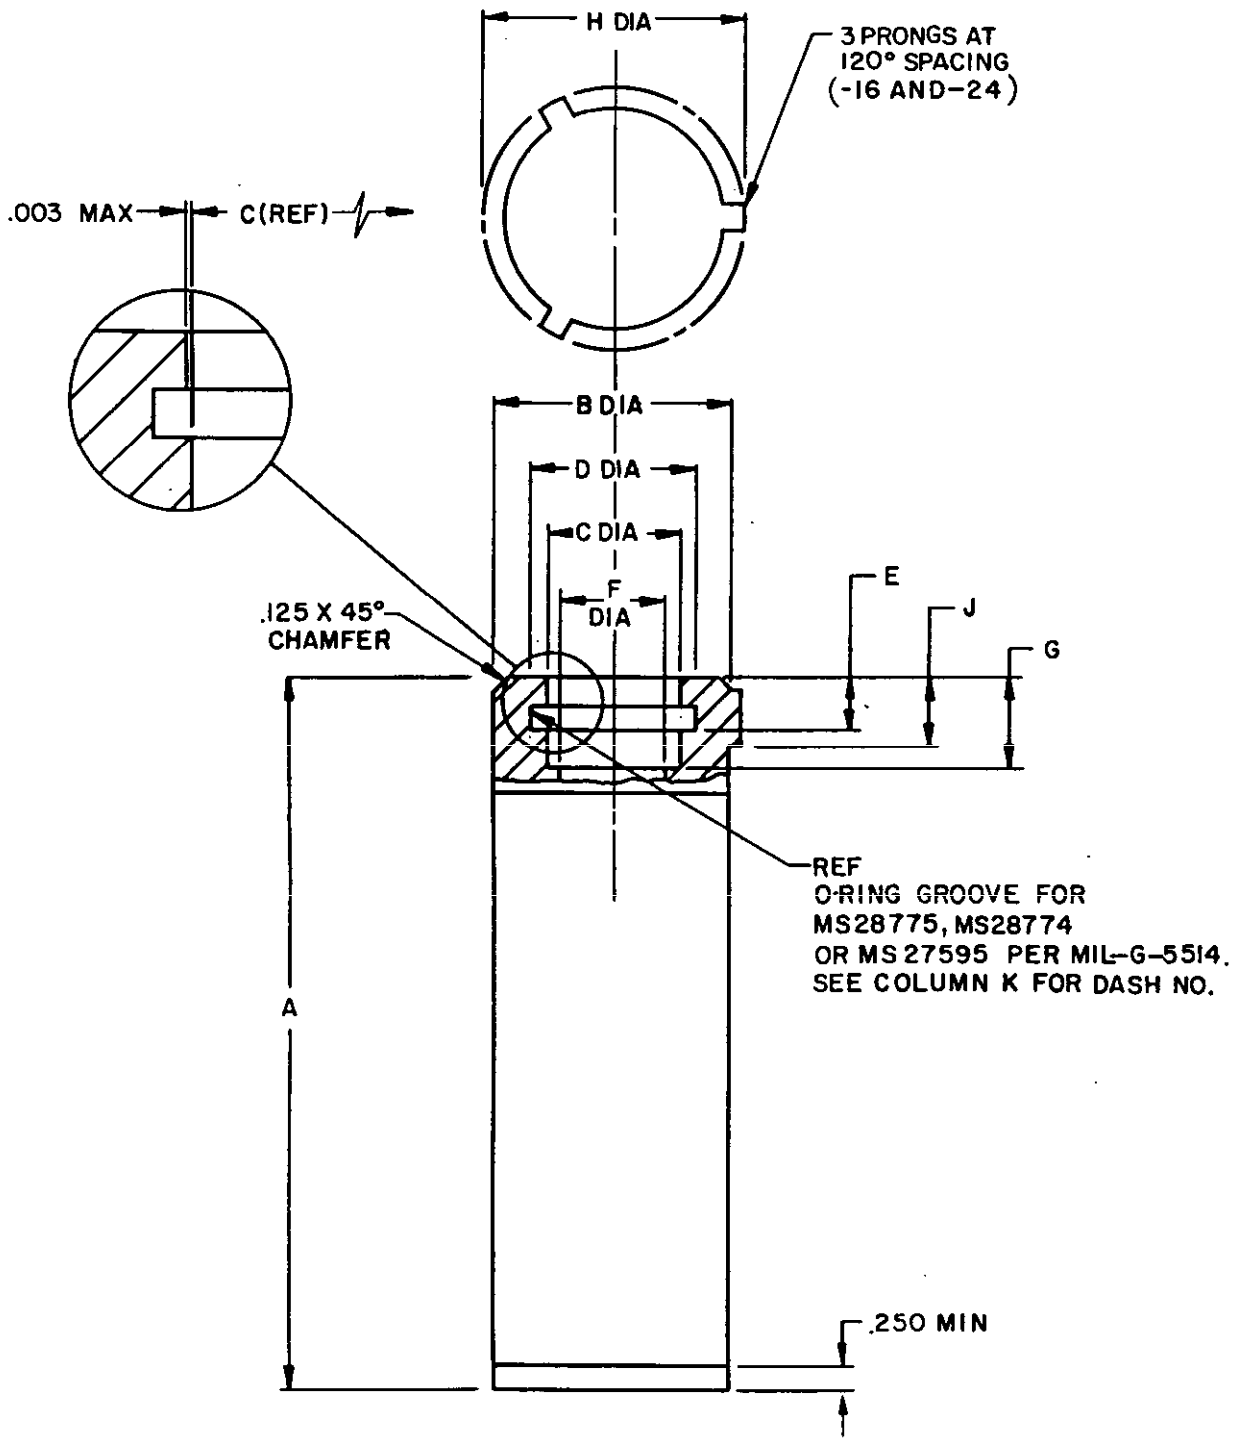

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional data.

ELEMENT PART NUMBER	FLOW RATE (gpm)	A		B DIA ±.004	C DIA ±.001	D DIA ±.001	E MAX
M81836/4-8	6	5.720	±.031	1.950	1.065	1.304	.290
M81836/4-16	30	12.900	±.062	2.701	1.251	1.492	.295
M81836/4-24	60	16.000		3.721	1.628	1.869	.295

ELEMENT PART NUMBER	F DIA MIN	G MIN	H DIA +.000 -.010	J MAX	K (REF) DASH NO. FOR "O" RING AND BACK-UP RING
M81836/4-8	.890	.605	-----	-----	-215
M81836/4-16	----	.610	2.812	.500	-218
M81836/4-24	----	.610	3.875	.500	-223

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.

Preparing Activity:
Navy-AS

(Project 4920-N465)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:15Z
Check the source to verify that this is the current version before use.