COMMERCIAL ITEM DESCRIPTION

RETRACTOR, GENERAL OPERATING

The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers a blunt single prong retractor (also called a Bernay Tracheal Retractor) for use in general surgical procedures.

Salient characteristics.

Material. The retractor shall be manufactured from martensitic corrosion resisting steel in accordance with American Society for Testing and Materials (ASTM) Standard F899).

Hardness. Finished retractors shall have a Rockwell hardness of 43 HRC minimum.

Style and design. The retractor shall be blunt point, single prong finger rake style. The retractor shall be in accordance with Figure 1. Retractors within a lot shall be entirely Type 1 or entirely Type II. Dimensions may not be interchanged between Type 1 and Type 2 within a single instrument. The point shall be well rounded, with no sharp or square edges.

Passivation. The retractor shall be properly passivated.

Finish. The finish of the retractor shall be satin. The finish shall be uniform and free from burrs, rough areas, pitting, scale, and grind or tool marks.

Markings. The retractor shall be permanently and legibly marked with the contractor's name or registered trademark and the word "stainless." Instruments of foreign manufacture shall be marked with the name of the country of manufacture.

Tests. Retractors shall be tested and examined as specified under Quality Assurance Provisions.

AMSC N/A FSC 6515

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:24Z
Check the source to verify that this is the current version before use.

Workmanship. The retractor shall be processed in such a manner as to be uniform and free from defects which affect life, utility, or appearance.

PRODUCT QUALITY LEVEL.

Visual and dimensional examination. Shall be examined to verify that design, construction and workmanship are in accordance with applicable requirements.

Materials. The supplier shall be responsible for performing tests to assure that materials are in accordance with requirements specified.

Unit. Each (EA). One retractor, as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Sampling for examination and tests. Sampling shall be conducted in accordance with MIL-STD-105 and as specified herein. The unit product for test or examination purposes shall be one retractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:24Z
Check the source to verify that this is the current version before use.

Examination. Retractors shall be examined to determine compliance with all requirements contained in this specification. Examination shall encompass dimensions, markings, bluntness of point, and finish. Sampling shall be S-2 with an AQL of 2.5.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics. Sampling shall be S-2 with an AQL of 1.0.

Corrosion resistance test. The retractor shall be tested for corrosion resistance in accordance with ASTM standard F1089.

Hardness test. The retractor shall be tested for hardness in accordance with ASTM Standard E18 or ASTM Standards E92 and E140.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specification, standard, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580, as amended, and as implemented by Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:24Z
Check the source to verify that this is the current version before use.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

NOTE: The following National Stock Number is covered by this document:

NSN	ITEM IDENTIFICATION
6515-01-238-0365	RETRACTOR, GENERAL OPERATING, Finger Rake, Blunt, Single Prong

Ordering data (Intermediate/exterior package quantities and labeling and marking must be specified in the contract and/or order).

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

Preparing Activity:

DoD-ME

Agent:

DLA-DM


CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
PHS
FDA-MPQAS

PGC 60465

Project No. 6515-4449

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:24Z
Check the source to verify that this is the current version before use.

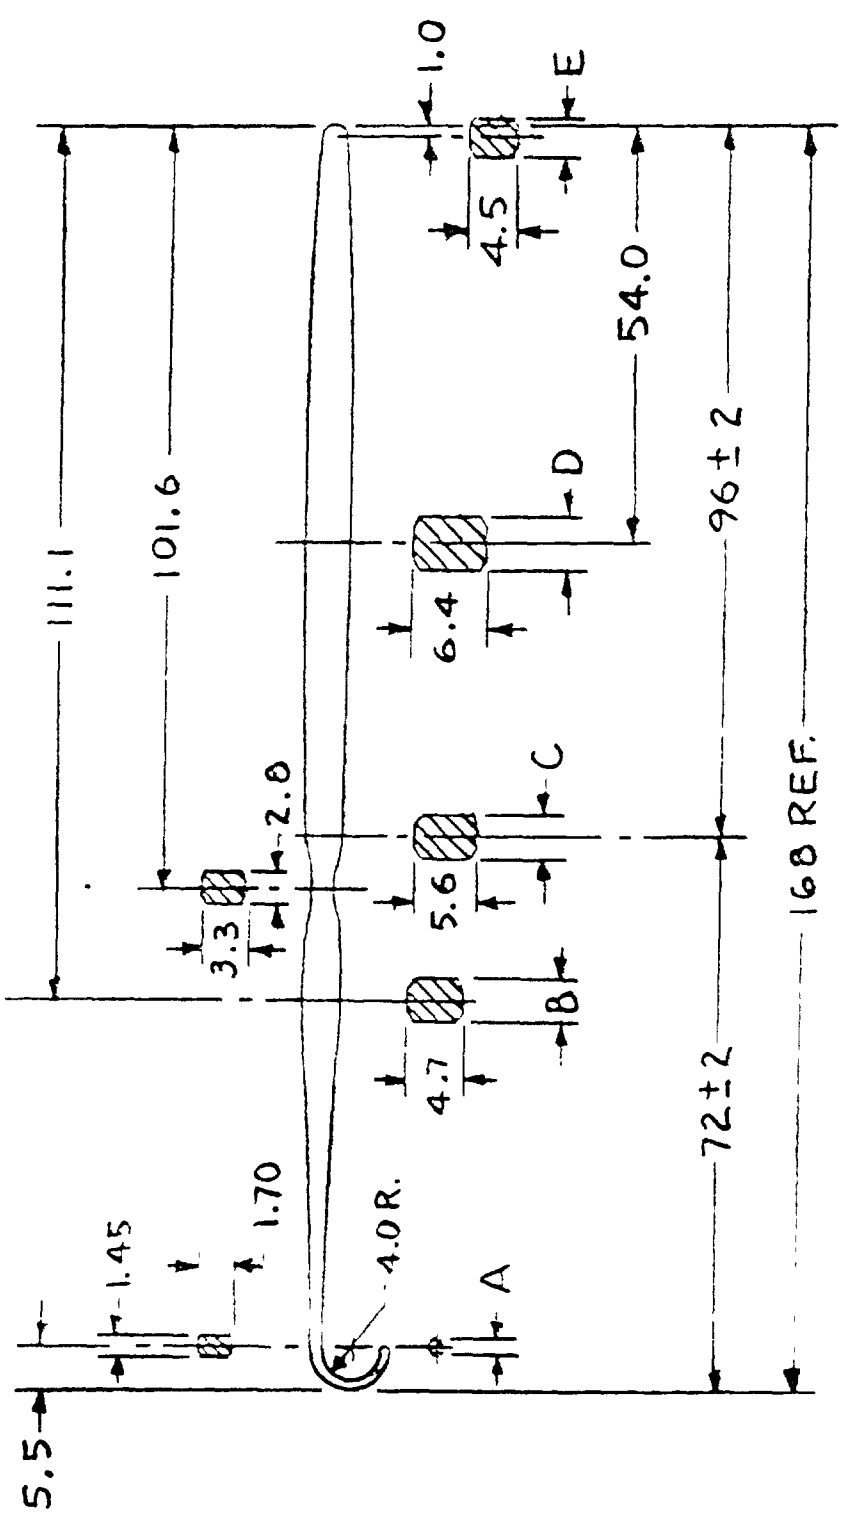

TYPE	A (DIA)	B	C	D	E
1	0.91	4.0	4.2	4.4	2.8
2	1.10	3.6	3.3	3.8	3.0

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ON

x.x	x.xx	ANGLES
± 0.5	± 0.10	±

FIGURE 1 RETRACTOR, GENERAL OPERATING, FINGER RAKE, BLUNT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:24Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
A-A-53769	RETRACTOR, GENERAL OPERATING

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil – Downloaded: 2026-10-26T09:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (DO NOT STAPLE), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4966 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Personnel Support Center
ATTN: DPSC-RSTE
2800 South 20th Street
Philadelphia, Pennsylvania 19101-8419

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:24Z
Check the source to verify that this is the current version before use.