MIL-H-51026B
14 SEPTEMBER 1962
SUPERSEDING
MIL-H-51026A(CmlC)
26 SEPTEMBER 1961

MILITARY SPECIFICATION

# HOPPER, FILLING, PORTABLE RIOT CONTROL AGENT DISPERSER, M4

*This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.*

## 1. SCOPE

1.1 This specification covers the hopper used with the M3 riot control agent disperser.

## 2. APPLICABLE DOCUMENTS

2.1 **Government documents.** The following documents of the issue in effect on date of invitation for bids form a part of this specification to the extent specified herein:

### SPECIFICATIONS

FEDERAL

PPP-B-576 — Box, Wood, Cleated, Veneer, Paper Overlaid.

PPP-B-601 — Boxes, Wood, Cleated-Plywood.

PPP-B-636 — Box, Fiberboard.

PPP-T-60 — Tape; Pressure Sensitive Adhesive, Waterproof—for Packaging and Sealing.

PPP-T-76 — Tape, Pressure-Sensitive Adhesive Paper, Water Resistant, (For Carton Sealing).

MILITARY

MIL-T-704 — Treatment and Painting of Materiel.

### STANDARDS

MILITARY

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 — Marking for Shipment and Storage.

### DRAWINGS

CBR AGENCY

C116-5-1 — Hopper, Filling, Portable

FSC 1040

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:47Z
Check the source to verify that this is the current version before use.

Riot Control Agent Disperser, M4 — Bill of Material. (All drawings referenced in this specification are listed on the above drawing.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

**2.2 Other publications.** The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules.

(Application for copies of these freight classification rules should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago 6, Illinois.)

## 3. REQUIREMENTS

**3.1 Materials and components.**

**3.1.1** *Materials.* All materials cited on Drawing C116-5-1 or on the subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.

**3.1.2** *Components.* All components of the hopper shall conform to the specifications and drawings listed on Drawing C116-5-1 and subsidiary drawings.

**3.2 Assembly.** The hopper shall be assembled as shown on Drawing D116-5-106.

**3.3 Workmanship.** The hopper shall be free from contamination (foreign matter, oil, or grease) and damage that would adversely affect its functioning, such as dents, cracks, or deformation.

## 4. QUALITY ASSURANCE PROVISIONS

**4.1** The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to insure that supplies and services conform to prescribed requirements.

**4.2 Special provisions.**

**4.2.1** *Alternative inspection procedures.* The supplier may utilize any alternative inspection procedure which will insure equal or better quality by submitting a written proposal with justification and obtaining written approval from the Government prior to instituting the procedure. In case of dispute, the procedures of this specification shall govern.

**4.2.2** *Supplemental evidence.* The supplier shall provide evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 have been satisfied.

**4.3 Lotting.** A regular production lot shall consist of the hoppers produced by one manufacturer, at one plant, under essentially the same manufacturing conditions and offered for acceptance at one time.

**4.4 Sampling for nondestructive examination.** Sampling shall be conducted in accordance with Standard MIL-STD-105.

**4.5 Examination.** Sample hoppers and the level A preparation for delivery thereof shall be examined in accordance with the classification of defects and Standard MIL-STD-105.

**4.5.1** *Classification of defects.*



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:47Z
Check the source to verify that this is the current version before use.

4.5.1.1 *Hopper, filling, portable riot control agent disperser, M4, assembly (Dwg. D116-5-106).*

| *Categories* | *Defects* |
|---|---|
| *Critical*—None defined | |
| *Major*—AQL 1.0 percent defective | |
| 101. | Component missing or incorrectly assembled |
| 102. | Agitator non-functional |
| 103. | Transition incorrect |
| 104. | Welding incorrect |
| 105. | Protective finish missing or incorrect |
| 106. | Marking missing, illegible, or incorrect |
| 107. | Damage or contamination (see 3.3) |
| 108. | Over-all length incorrect |
| 109. | Hopper agitator location incorrect |
| *Minor*—AQL 2.5 percent defective | |
| 201. | Handle on agitator does not rotate freely |

4.5.1.2 *Preparation for delivery (section 5).*

| *Categories* | *Defects* |
|---|---|
| *Critical*—None defined | |
| *Major*—AQL 6.5 percent defective | |
| 101. | Container incorrect |
| 102. | Quantity per container incorrect |
| 103. | Fiberboard cells missing |
| 104. | Container closure incorrect |
| 105. | Strapping loose or missing |
| 106. | Container damaged (broken, torn, punctured, crushed, or wracked) |
| 107. | Marking missing, illegible, or incorrect |

## 5. PREPARATION FOR DELIVERY

**5.1 Packaging.** Level shall be as specified (see 6.1).

5.1.1 *Level A.* The hopper shall be packaged in a W6c, style RSC, fiberboard box conforming to Specification PPP-B-636. The inside dimensions of the box shall be 12 by 9 by 20 inches. The hopper cover shall be closed and secured in this position with type III, class 2 tape, conforming to Specification PPP-T-60. The hopper shall be placed inside the box as shown in figure 1, using fiberboard cells, as shown in figure 2, to nest the hopper within the box. Fiberboard filler pads fabricated from the same material as the box shall be used as required to make a tight pack. The box shall be closed as specified in the appendix to the box specification for interior boxes, except that all seams, corners, and the manufacturer's joint shall be taped as specified, using pressure sensitive tape conforming to Specification PPP-T-76 in lieu of the tape specified.

5.1.2 *Level C.* The hopper shall be packaged in accordance with the manufacturer's commercial practice.

**5.2 Packing.** Level shall be as specified (see 6.1).

5.2.1 *Level A.* The hoppers, packaged as specified in 5.1, shall be packed by one of the following methods as specified (see 6.1):

5.2.1.1 *Unit pack.* Each hopper shall be packed in either an overseas-type, style A, cleated-plywood box conforming to Specification PPP-B-601 or in a style A, class 2, wood, cleated, veneer, paper-overlaid box conforming to Specification PPP-B-576. Each box shall be provided with a hinged cover having suitable hinges and hasp attached thereto. All surfaces of each box shall be treated and painted in accordance with Specification MIL-T-704, type A, color Marine Corps Green, semi-gloss. The hinged box cover shall not be secured in a closed position with nails or screws. The boxes shall be strapped in accordance with the appendix to the applicable container specification, except that there shall be only two straps used, applied girthwise one at each end of the box. The box hasp shall be secured in a closed position with wire or other suitable means.

5.2.1.2 *Multiple pack.* Two or more hoppers



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:47Z
Check the source to verify that this is the current version before use.


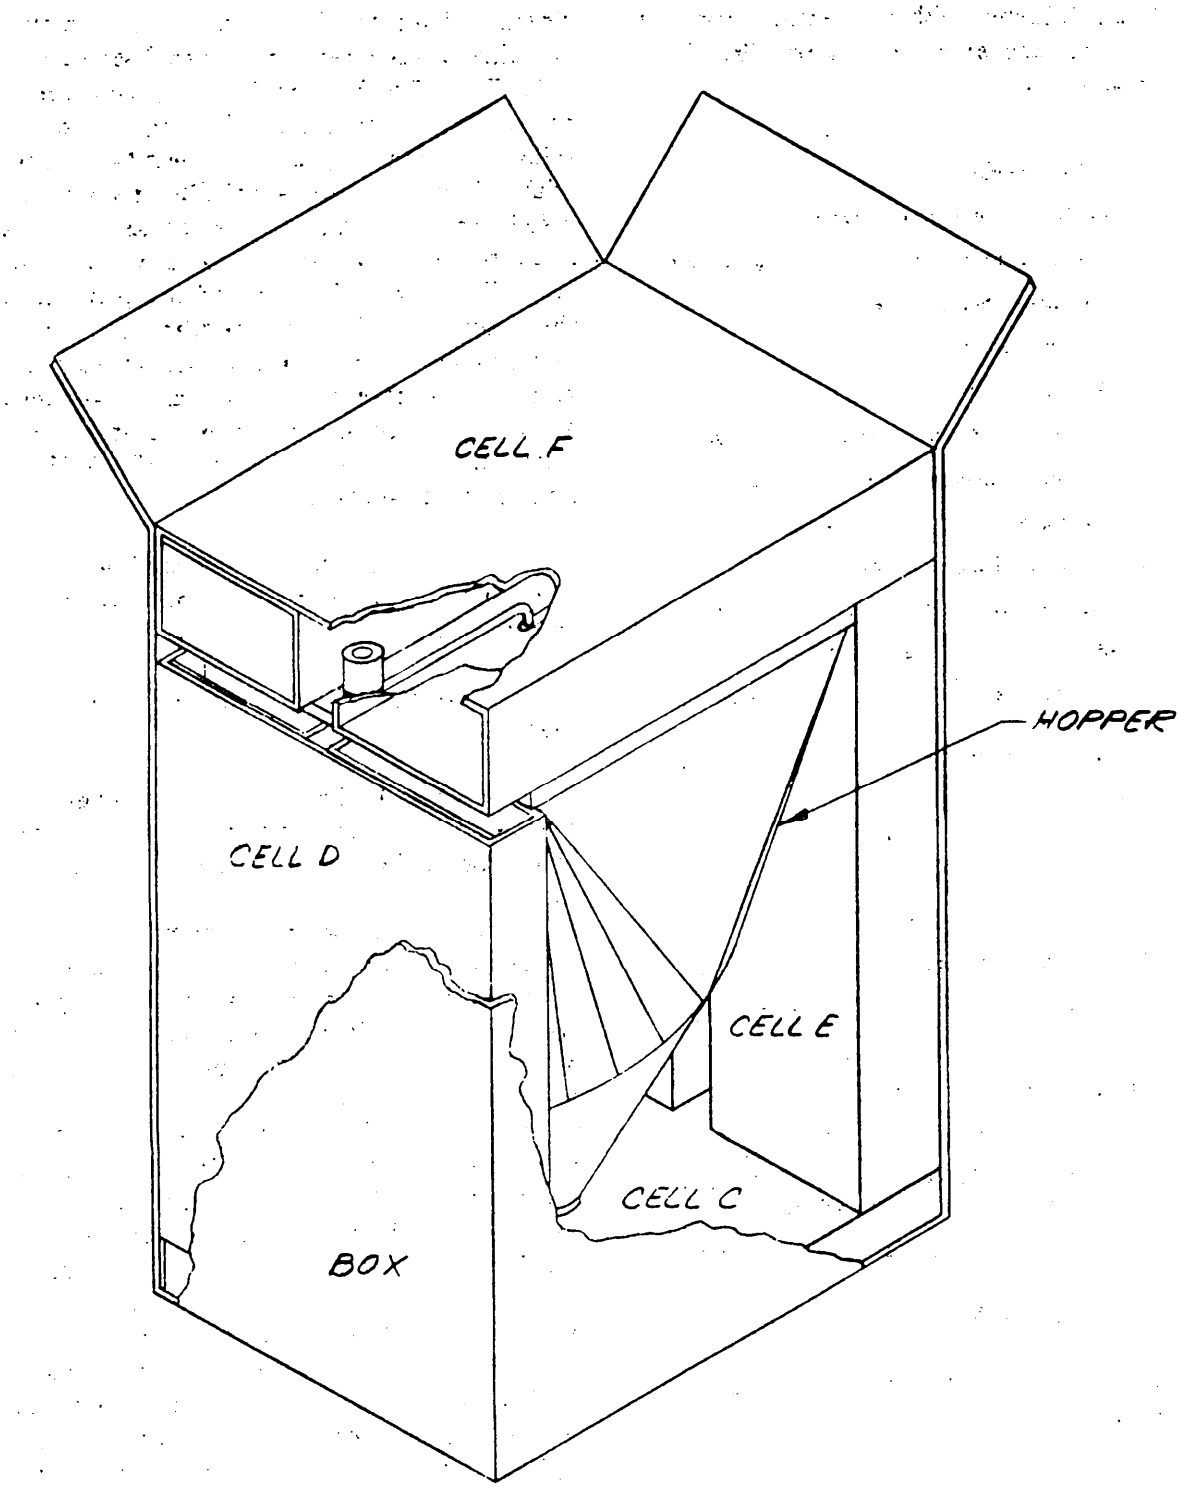



FIGURE 1. *Hopper package assembly*



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:47Z
Check the source to verify that this is the current version before use.

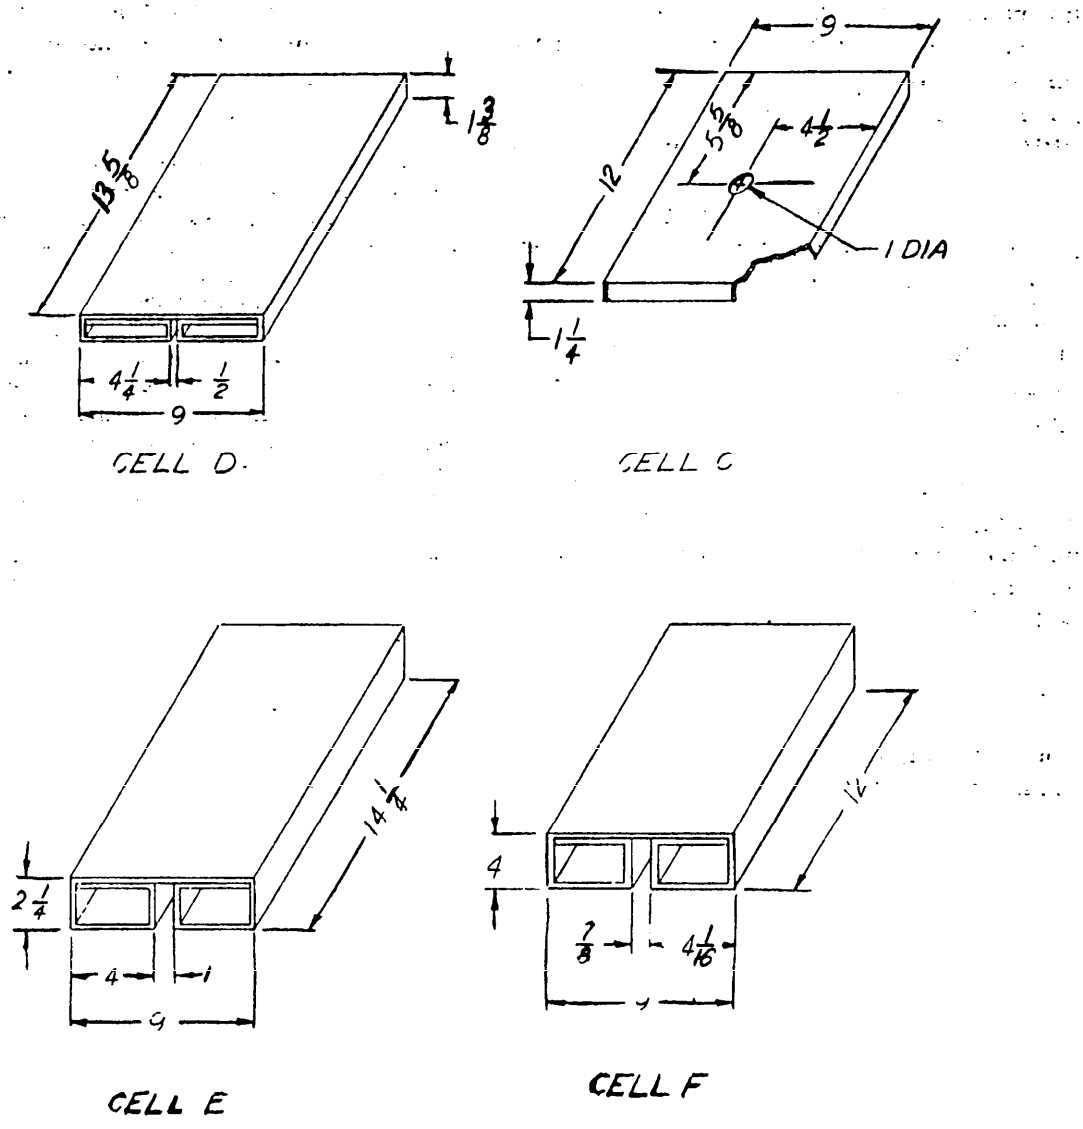


MATERIAL

FIBERBOARD, TYPE I, CLASS 2, GRADE W6c, SPEC PPP-B-636

FIGURE 2. *Packaging cells*



Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:47Z
Check the source to verify that this is the currentversion before use.

shall be packed in a V3c, style RSC, fiberboard box conforming to Specification PPP-B-636. In addition to the closure and reinforcement requirements specified in the appendix thereto, the boxes shall have all seams, corners, and the manufacturer's joints taped as specified therein, using pressure-sensitive tape conforming to Specification PPP-T-76 in lieu of the tape specified.

5.2.2 *Level C.* Hoppers, packaged as specified in 5.1, shall be packed to insure carrier acceptance and safe delivery at first destination for immediate use. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 **Marking.** In addition to any special marking required by the contract or order, unit packages and shipping containers shall be marked in accordance with Standard MIL-STD-129.

## 6. NOTES

**6.1 Ordering data.** Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Level of packaging and packing required.
(c) If level A packing is used, the type of pack and container desired.
(d) Quantity per pack if multiple pack is used.

**Notice.** When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

**Custodians:**
Army—CBRA
Navy—MC
Air Force—WRA

**Review interest:**
Army—CBRA
Air Force—WRA

**User interest:**
Navy—MC

**Preparing activity:**
Army—CBRA



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:47Z
Check the source to verify that this is the current version before use.