MILITARY STANDARD

MIL-STD-1386-60
(NAVY)


28 FEBRUARY 1975

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

MECHANISM COMPARTMENT MK 2 MOD 3 FOR MK 57 UNDERWATER MINE IN CRATE MK 104 DOMESTIC UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-53/794
WEIGHT (APPROX)	1484 LBS
DIMENSIONS	80 L x 52 W x 31 1/8 H
CUBE	75 CU FT
DOT HAZARD CLASSIFICATION	INERT
COAST GUARD CLASS	NONE

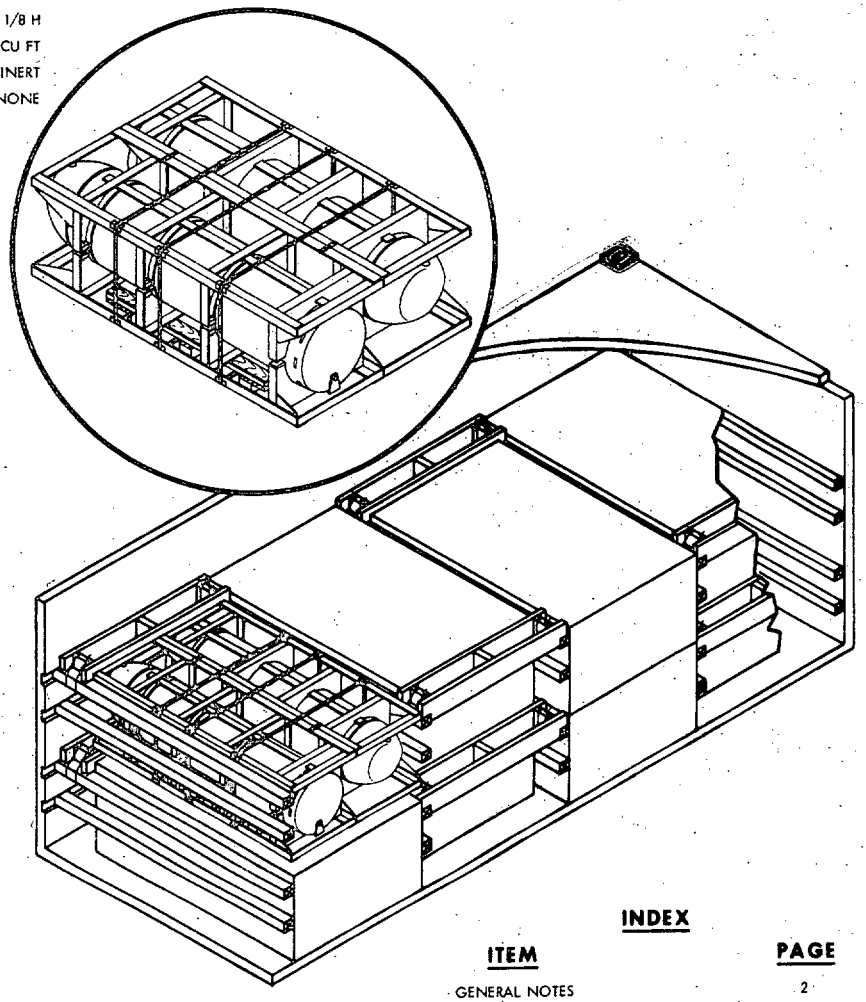

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINERSHIP & HIGHWAY	2 & 3

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

M.S. Gray N.W.H.L. 2/21/75
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

L.E. Kelly 2/21/75
SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR S.R. Peters 2/21/75
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
N A D EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH DOMESTIC UNIT LOADS OF MECHANISM COMPARTMENTS MK 2 MOD 3 FOR MK 57 UNDERWATER MINES IN CRATES MK 104.. THE UNIT LOAD SHALL BE IN ACCORDANCE WITH WR-53/794.
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOADBRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C.
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR.
4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO THE BELT RAILS FOR SHIPMENT.

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.


5. WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL B.
6. UNIT LOADS ARE LOADED IN A STAGGERED PATTERN WITH THE 1ST AND 3RD BAYS AGAINST LEFT WALL OF MILVAN AND THE 2ND AND 4TH BAYS AGAINST RIGHT WALL OF MILVAN.
7. LENGTH OF STRUT, PIECE 2, SHALL BE SUFFICIENT TO CAUSE SWAY BRACE ASSEMBLY, DETAIL A, TO BEAR AGAINST UNIT LOAD AND CONTAINER SIDE WALL. TWIST TIE ASSEMBLY TO CROSSMEMBERS WITH 16 GAUGE, SOFT ANNEALED IRON WIRE, FOUR PLACES.
8. APPLICABLE MATERIAL SPECIFICATIONS:
   DUNNAGE LUMBER - FED. SPEC. MM-L-751
   NAILS - FED. SPEC. FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT
9. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS.

TOFC/COFC, CONTAINERSHIP AND HIGHWAY


1. THE CONTAINER LOAD CONSISTS OF 8 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT.
2. THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS:
   A. ONE CONTAINER ON A 20-FT MILVAN CHASSIS WITH DOUBLE BOGIES AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.
   B. TWO CONTAINERS ON A 40-FT MILVAN CHASSIS WITH DOUBLE BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.
3. ONE OR TWO LOADED CONTAINERS MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS ON SUITABLE COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY. CONTAINERS MUST BE ADEQUATELY SECURED TO THE EQUIPMENT..
4. THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC. WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED:
   A. ONE CONTAINER ON A 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.
   B. TWO CONTAINERS ON A 40-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.

WARNING

CHASSIS CONTAINERS COUPLED INTO A 40-FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC RAILCAR. THE REAR END OF THE 40-FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END. 20-FT AND 40-FT UNITS CAN BE LOADED ON THE SAME CAR.

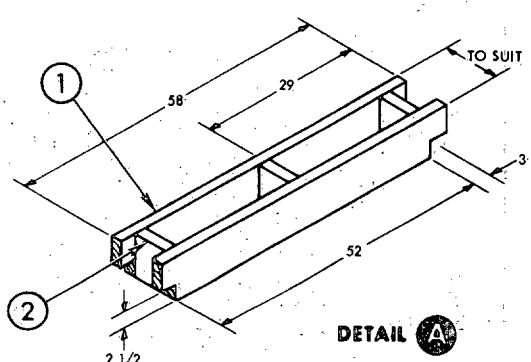



DETAIL A
SWAY BRACE ASSEMBLY
8 REQUIRED

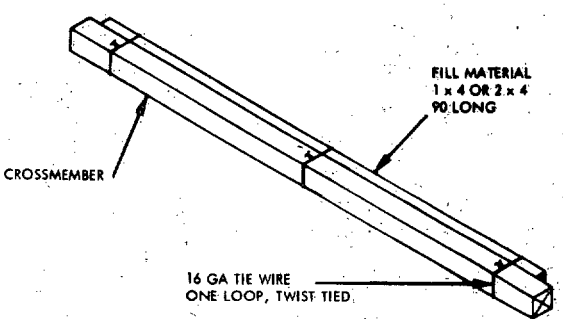

DETAIL B
FILL MATERIAL
SEE NOTE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

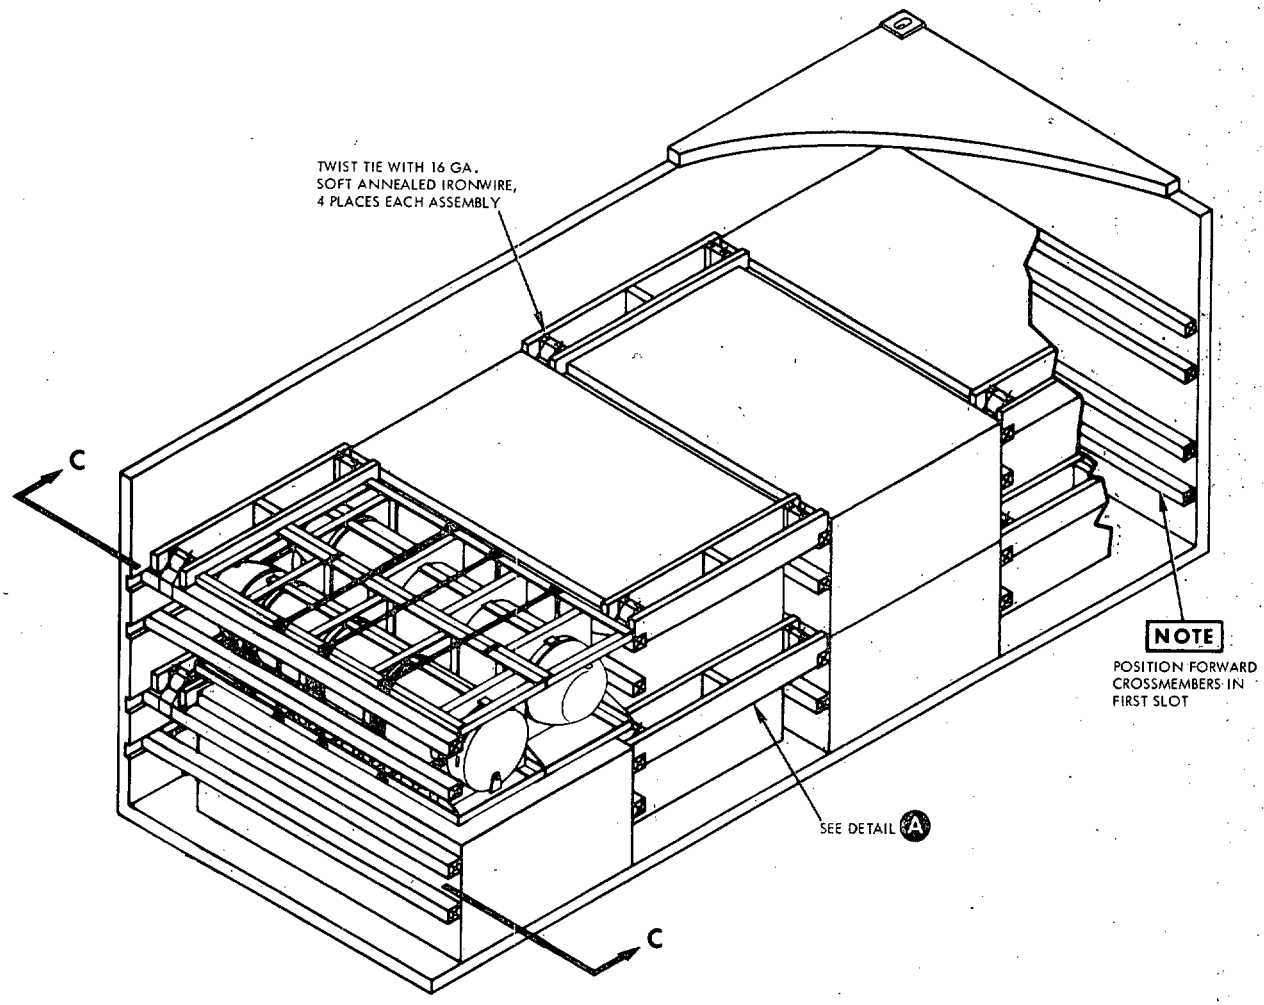

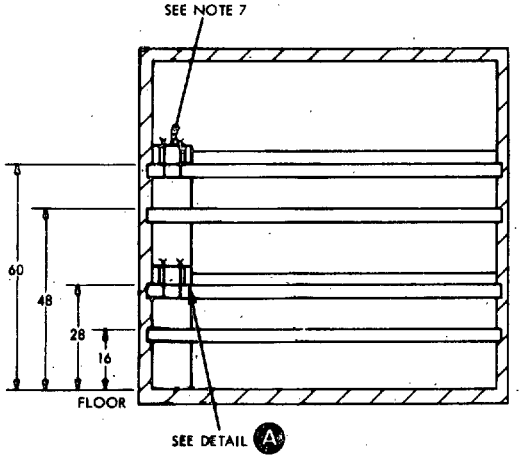

SECTION C-C

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	8
NUMBER OF CROSSMEMBERS	20
LOAD WEIGHT (APPROX)	11,872 LBS
DUNNAGE WEIGHT (APPROX)	346 LBS
CONTAINER WEIGHT (APPROX)	5,785 LBS
GROSS WEIGHT (APPROX)	18,003 LBS

PIECE NO.	DESCRIPTION	SIZE	NO. PCS REQD	NAIL TO	NUMBER	SIZE
					NAILS	
2	STRUT	2 x 8 x TO SUIT	24	SEE 1	-	-
1	STRINGER	2 x 8 x 58	16	2	3 PER JOINT	16d

LIST OF MATERIALS AND NAILING DATA

TOFC/COFC, CONTAINERSHIP AND HIGHWAY

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N279)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-STD-1386-60 (Navy)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding Officer
Naval Weapons Station Earle
Naval Weapons Handling Laboratory (803)
Colts Neck, New Jersey 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.