METRIC


DOD-M-24672/9(SH)
27 October 1986
SUPERSEDING
NAVSHIPS DRAWING
815-1197360
(REV A)
1 March 1966

MILITARY SPECIFICATION SHEET

MOLDS - SPLIT CAVITY FOR MOLDING 90 DEGREE PLUGS (METRIC)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molds described herein shall consist of this specification and the latest issue of DOD-M-24672.

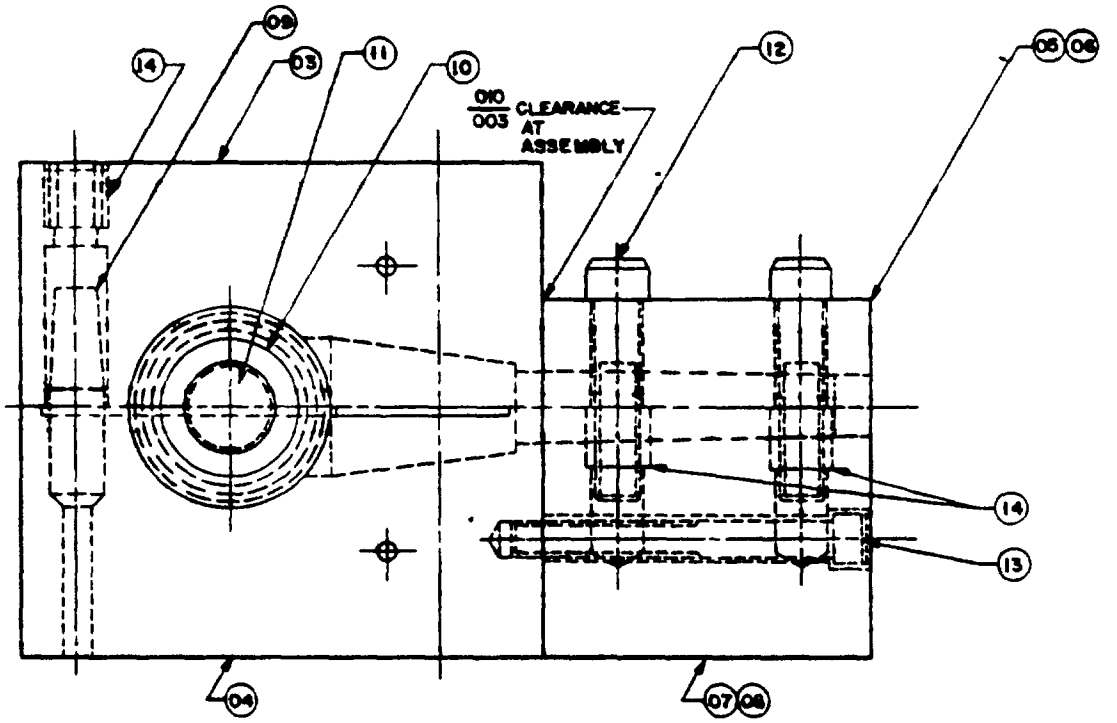


SH 131667

FIGURE 1. Mold assembly, typical. (01) (02)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be plus or minus 0.02 for two-place decimals, plus or minus 0.005 for three-place decimals, and plus or minus 0 degree 15 minutes for angular dimensions.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

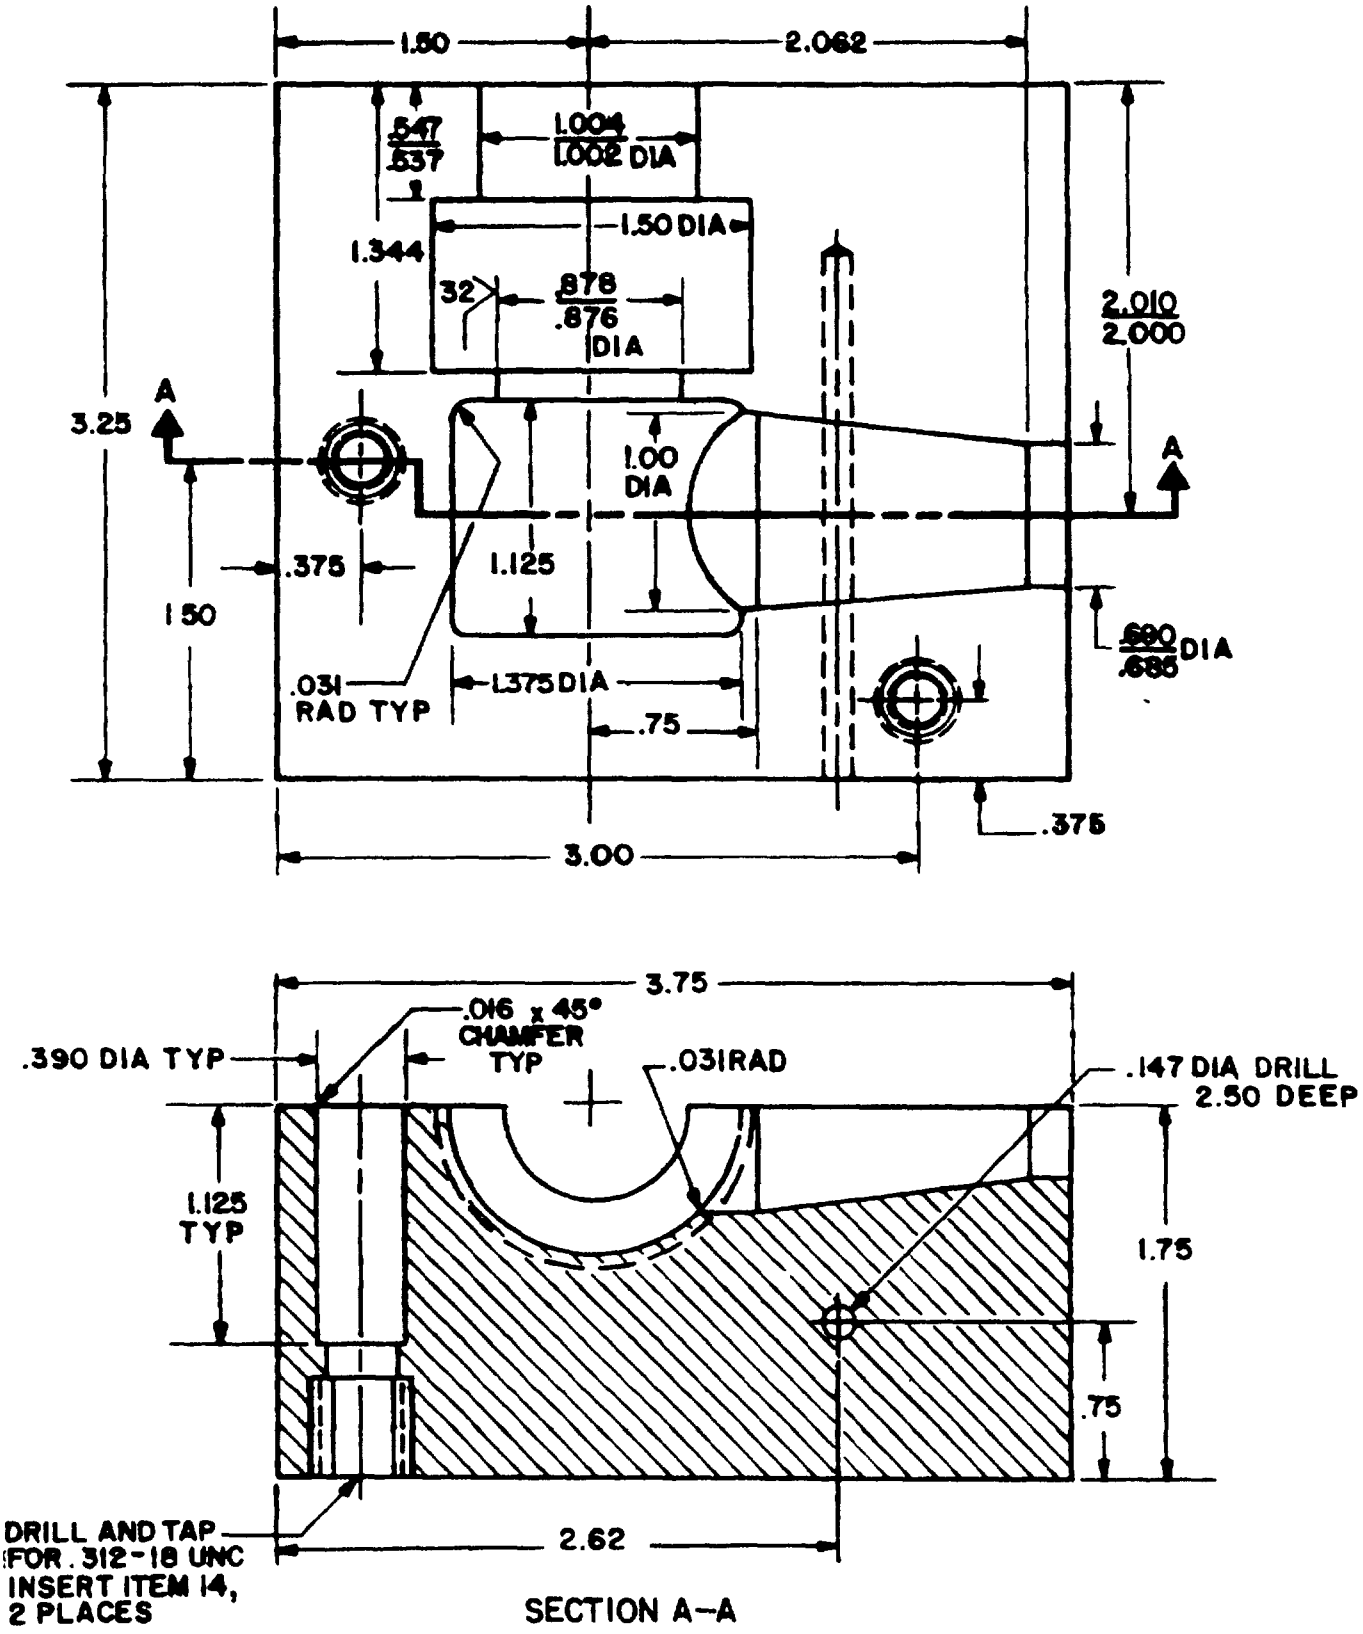

SH 131668

FIGURE 2. Mold, top section. (03)


Source: https://assist.dla.mil/ -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

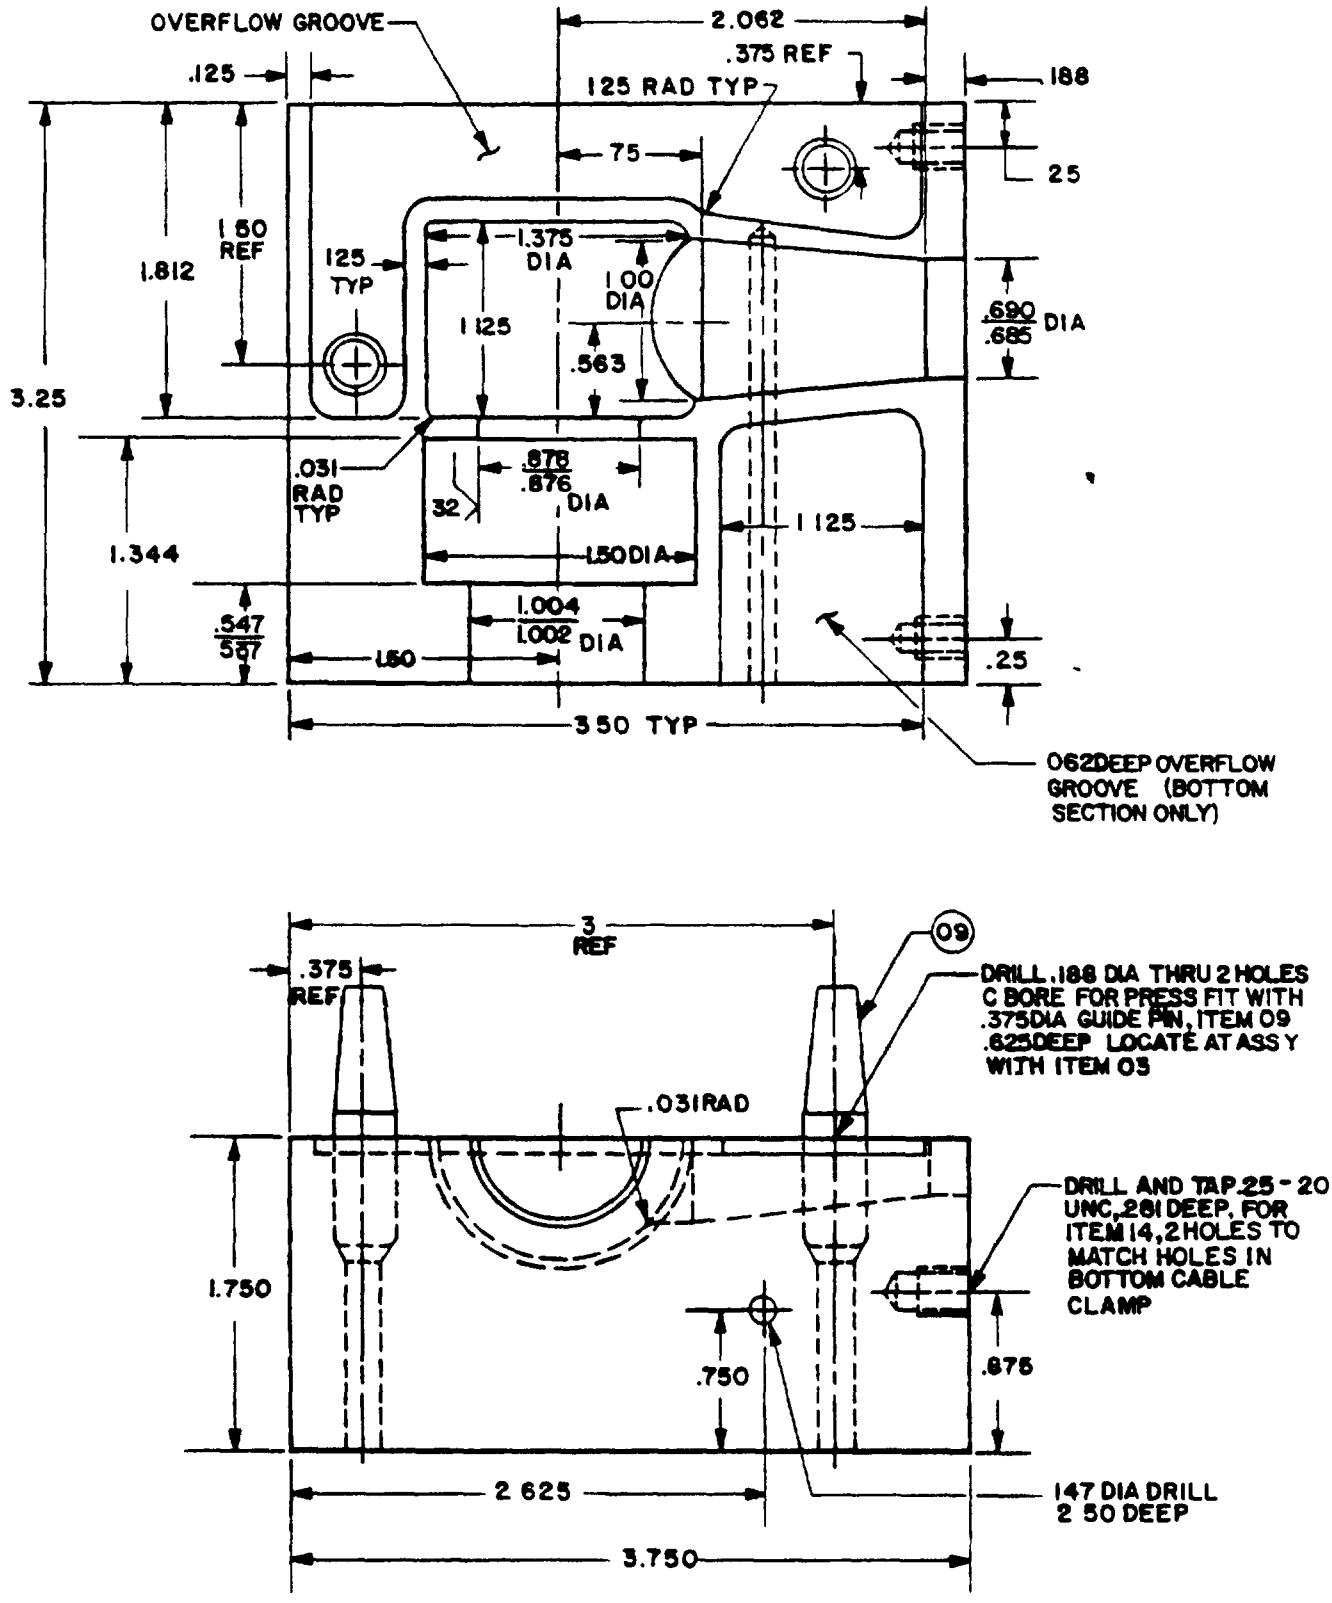

SH 131669

FIGURE 3. Mold, bottom section. (04)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

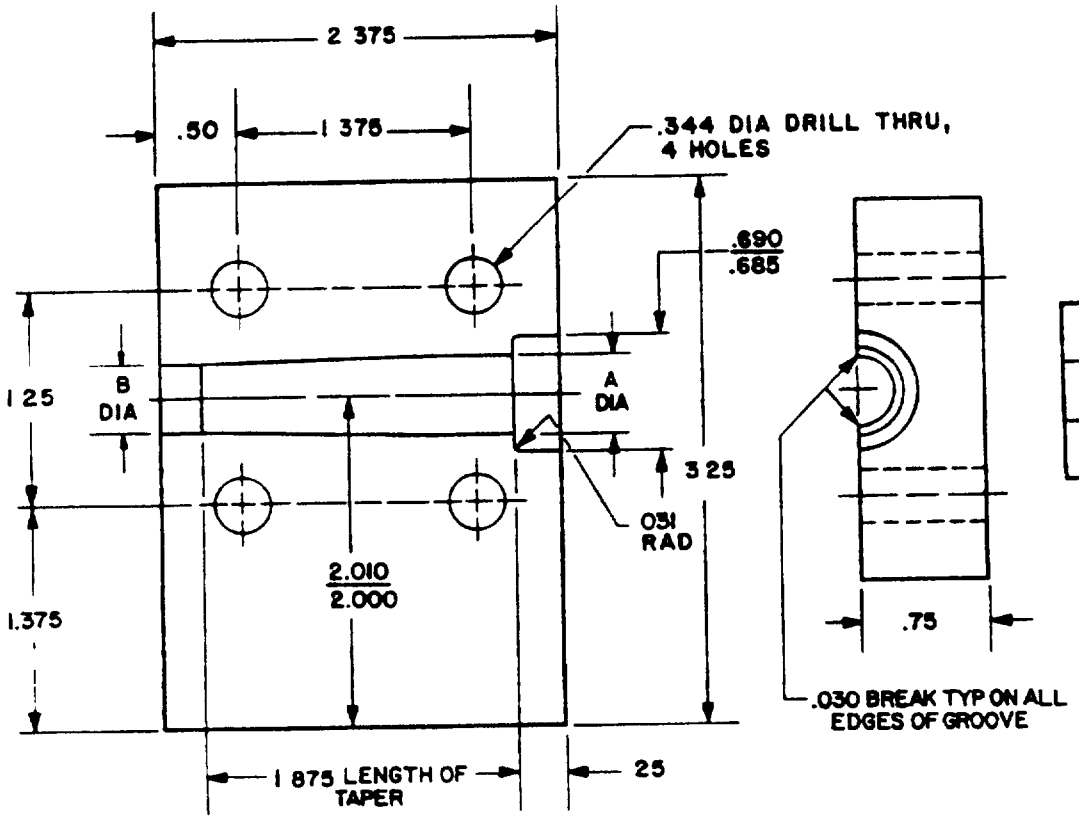

ITEM	DIA A	DIA B
05	0.517 / 513	0 454 / 450
06	407 / 403	349 / 345

SH 131670

FIGURE 4. Clamp, cable, top. (05) (06)

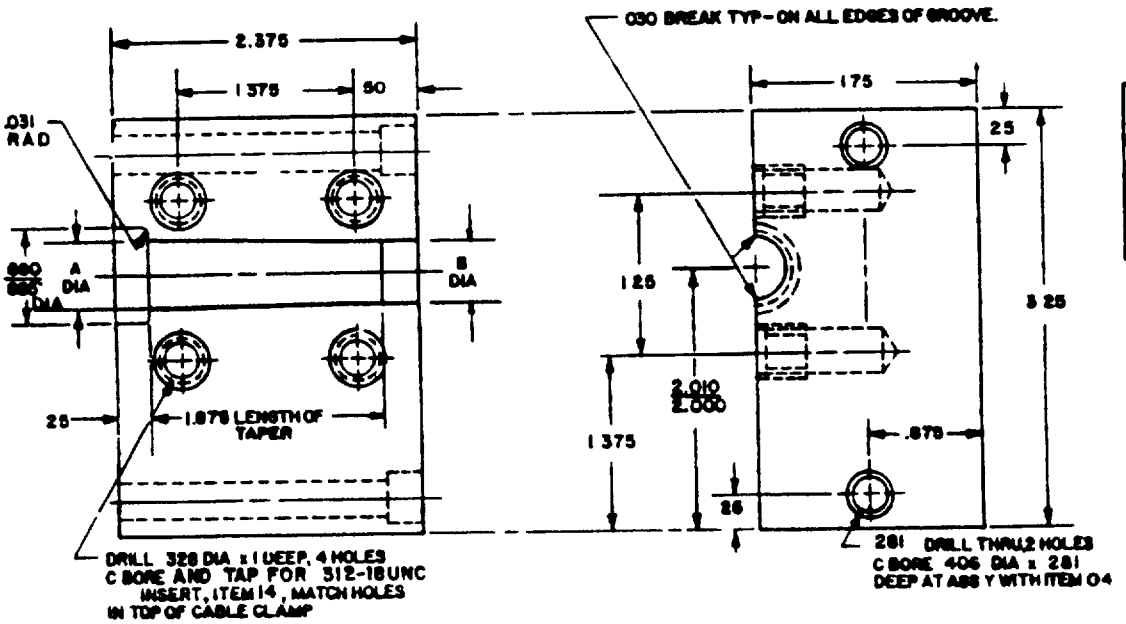


ITEM	DIA A	DIA B
07	0.517 / 513	0.454 / 450
08	407 / 403	349 / 345

SH 131671


FIGURE 5. Clamp, cable, bottom. (07) (08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

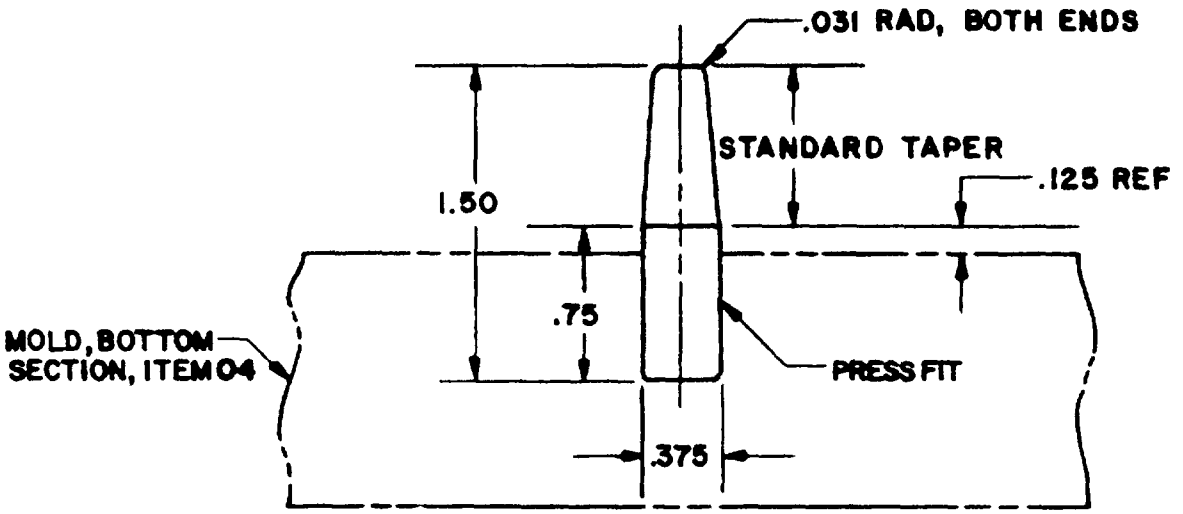


SH 131672

FIGURE 6. Pin, guide. (09)

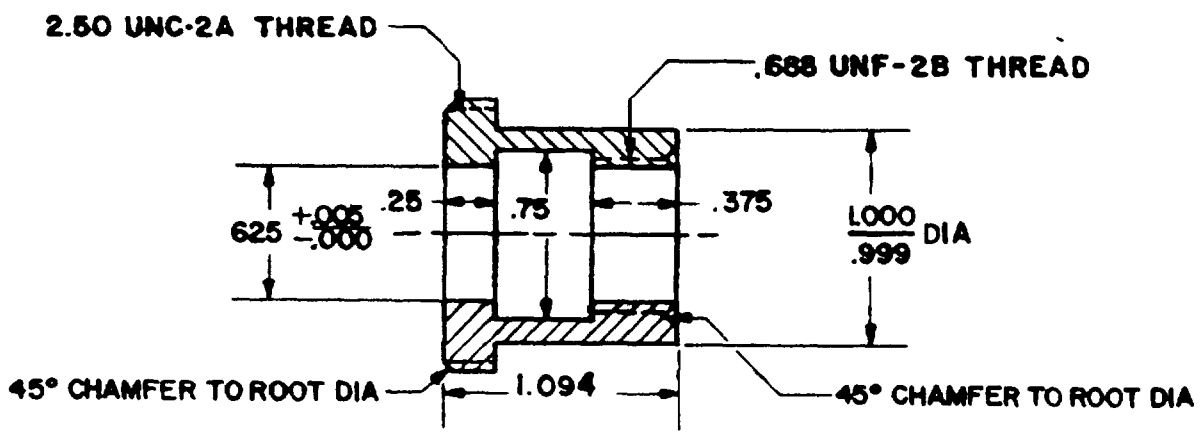

SH 131673

FIGURE 7. Spacer, plug. (10)

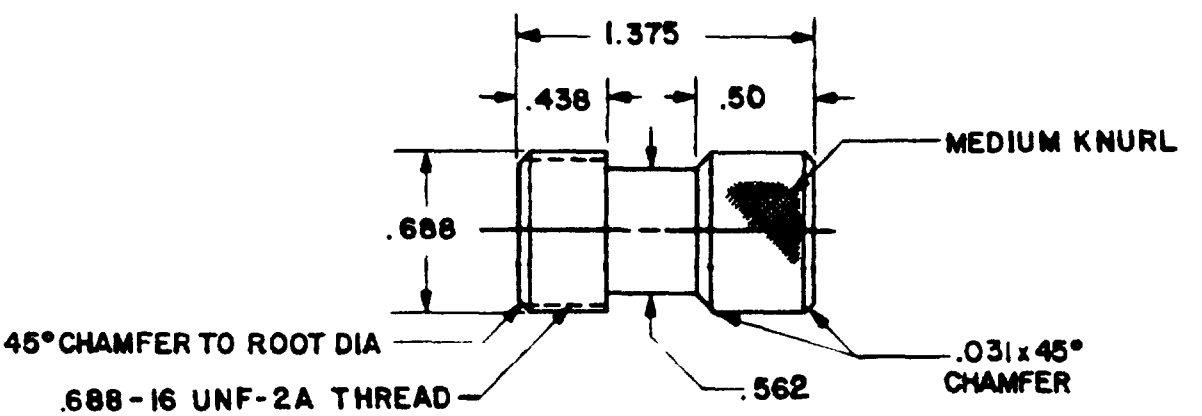

SH 131674

FIGURE 8. Spacer, insulator. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The molds shall be used for molding 90 degree plugs having three number 16 contacts. For molding procedures see NAVSHIPS drawing 815-1197348.

DESIGN:

Dimensions and configuration: See figures 1 through 8.
Material: As specified in table II.
Surface finish: Surface finish shall be roughness average 63, except as specified herein and shall be in accordance with ANSI B46.1.
Parts list: The parts shown in table II shall be used in the construction of the mold assemblies shown herein.

GENERAL INFORMATION:

Military part numbers are shown in table I.

TABLE I. Military part numbers.

Part number	Description
D24672/9-001	Mold assembly for 90 degree plug - 3 number 16 contacts - cable dia 0.500/.480.
D24672/9-002	Mold assembly for 90 degree plug - 3 number 16 contacts - cable dia 0.390/.370.

TABLE II. Parts list.

Item no 1/	Description	Quantity per assembly, D24672/9-		Material specification	Remarks
		001	002		
01	Mold assembly	—		—	Figure 1
02	Mold assembly		—	—	Figure 1
03	Mold, top section	1	1	AL Alloy #6061(T6) ASTM B 211	Figure 2
04	Mold, bottom section	1	1	AL Alloy #6061(T6) ASTM B 211	Figure 3
05	Clamp, cable, top	1		AL Alloy #6061(T6) ASTM B 211	Figure 4
06	Clamp, cable, top		1	AL Alloy #6061(T6) ASTM B 211	Figure 4
07	Clamp, cable, bottom	1		AL Alloy #6061(T6) ASTM B 211	Figure 5
08	Clamp, cable bottom		1	AL Alloy #6061(T6) ASTM B 211	Figure 5
09	Pin, guide	2	2	Steel, MIL-S-8559	Figure 6
10	Spacer, plug	1	1	Brass, Naval QQ-B-637, Alloy 464	Figure 7
11	Spacer, insulator	1	1	Brass, Naval QQ-B-637, Alloy 464	Figure 8

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no 1/	Description	Quantity per assembly, D24672/9-		Material specification	Remarks
		001	002		
12	Screw, cap, socket hd 0.312-18 UNC-2A x 1.50 L	4	4	Steel, Commercial (Coml)	——
13	Screw, cap, socket hd 0.25-20 UNC-2A x 2.375 L	2	2	Steel, Coml	——
14	Insert, heli-coil	6	6	MS122082	——

1/ Item numbers are the same as numbers shown in circles on figures.

Preparing activity:
Navy - SH
(Project 5935-N263-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362 -5101

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
DOD-M-24672/9(SH)	MOLDS - SPLIT CAVITY FOR MOLDING 90 DEGREE PLUGS (METRIC)

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:54Z
Check the source to verify that this is the current version before use.