

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

NOTE: This drawing supersedes all antecedent standardization documents for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

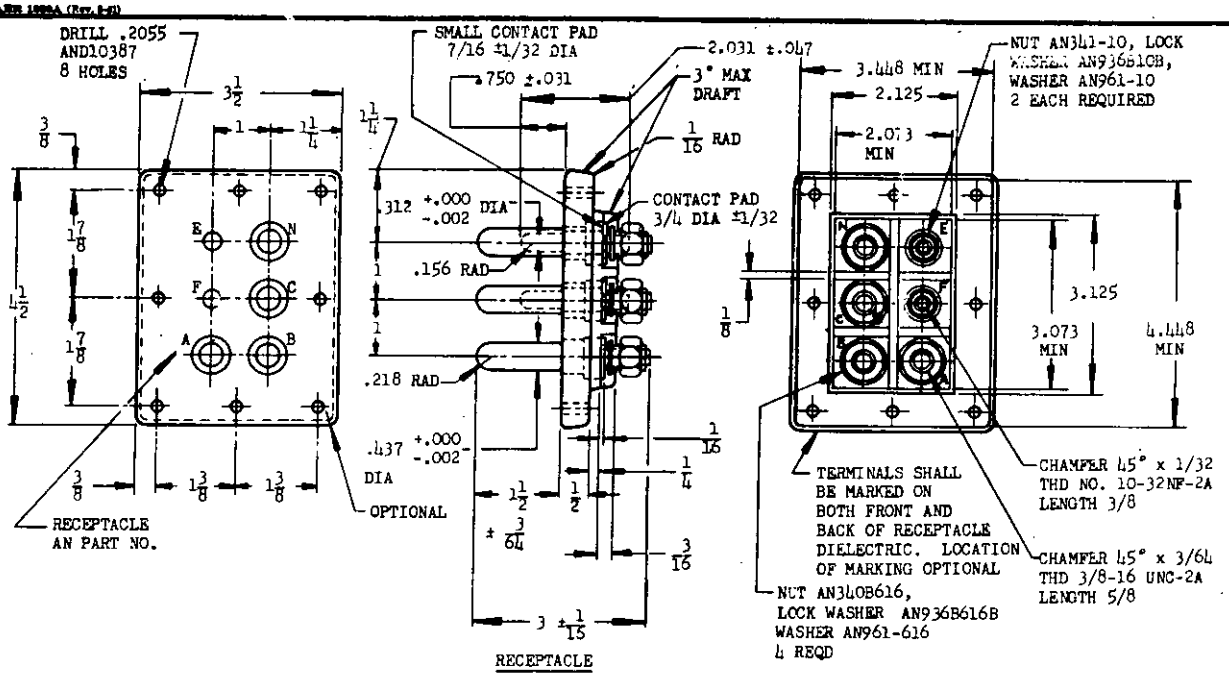

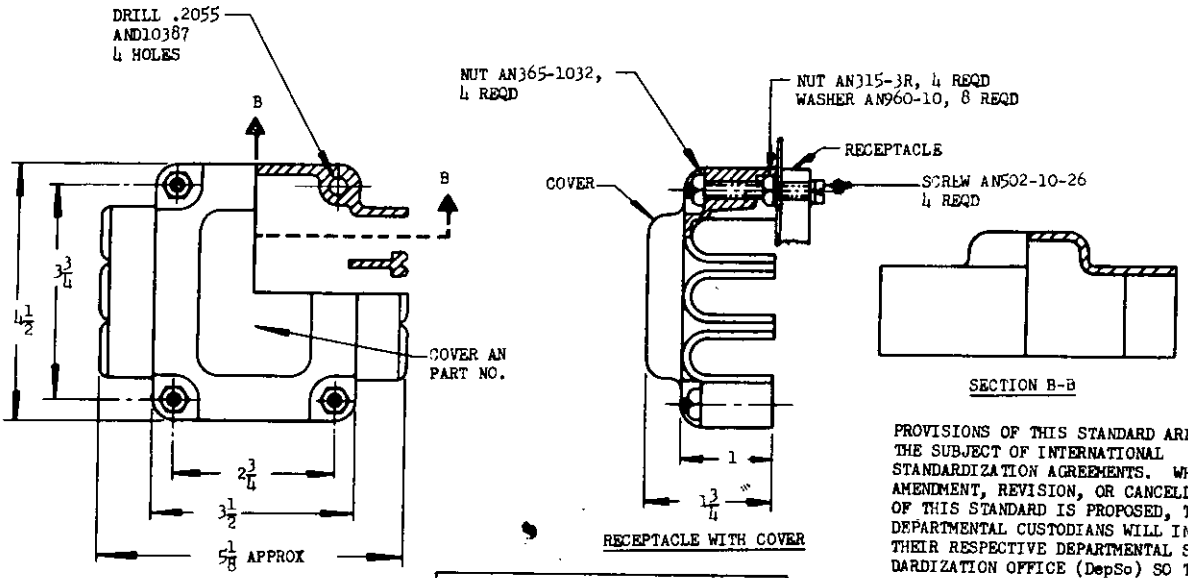

PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS. WHEN AMENDMENT, REVISION, OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE (DepSo) SO THAT APPROPRIATE ACTION MAY BE TAKEN REGARDING THE INTERNATIONAL AGREEMENT CONCERNED.

	AN PART NO.		
	WITHOUT COVER	WITH COVER	COVER
(a)	~~AN3114-1A~~	~~AN3114-2~~	~~AN3114-3~~
(b)	AN3114-1B	AN3114-2A	AN3114-3A

(a) PREVIOUS PART NUMBER AN3114-1 INACTIVE FOR DESIGN AFTER 7 APRIL 1950. PART NUMBER AN3114-1A REPLACES AND IS INTERCHANGEABLE WITH PART NUMBER AN3114-1.

(b) PART NUMBERS AN3114-1A, AN3114-2, AND AN3114-3 INACTIVE FOR DESIGN AFTER 14 FEBRUARY 1951. PART NUMBERS AN3114-1B, AN3114-2A, AND AN3114-3A REPLACE AND ARE INTERCHANGEABLE WITH PART NUMBERS AN3114-1A, AN3114-2, AND AN3114-3, RESPECTIVELY.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

CONTACTS: E AND F TELLURIUM COPPER OR BRASS MACHINED TO PROVIDE CONTACT PAD. SILVER PLATED .0002. A, B, C, AND N TELLURIUM COPPER OR EQUAL MACHINED TO PROVIDE CONTACT PAD, SILVER PLATED .0002.

MATERIAL: BASE; THERMOSETTING PLASTIC, SPECIFICATION MIL-P-15037.

COVER: SHATTERPROOF SYNTHETIC RUBBER OR PHENOLIC COMPOUND. 90-110 SHORE HARDNESS, TEMPERATURE RANGE -65° TO +75°C.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1/2°.
ALL THREADS SPECIFICATION MIL-S-7742.

(1) CANCELED AFTER 15 Mar 82. SUPERSEDED BY MS 3505 and MS 90362.

APPROVED 30 Sep 48 REVISED (1) 8 Nov 48 (2) 7 Apr 50 (3) 14 Feb 51 (4) 14 Jan 52 (5) 14 Aug 53 (6) 30 Jul 54 (7) 20 Oct 54 (8) 25 Jan 55 (9) 1 Nov 55 (10) 28 Jun 57 (11) 15 Mar 82

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3114
MIL-C-7974	RECEPTACLE, EXTERNAL POWER 115/200 VOLTS, 3 PHASE	

Source: https://assist.dla.mil -- Downloaded: 2020-10-20T14:49Z
Check the source to verify that this is the current version before use.