
NOTICE — When Government drawings specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated furnished or in any way supplied the said drawings specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto

This standard has been approved by the Department of the and is mandatory for use by that activity All other military activities are required to employ this standard where suitable

MS9445 (ASG)

FED SUP CLASS 5306

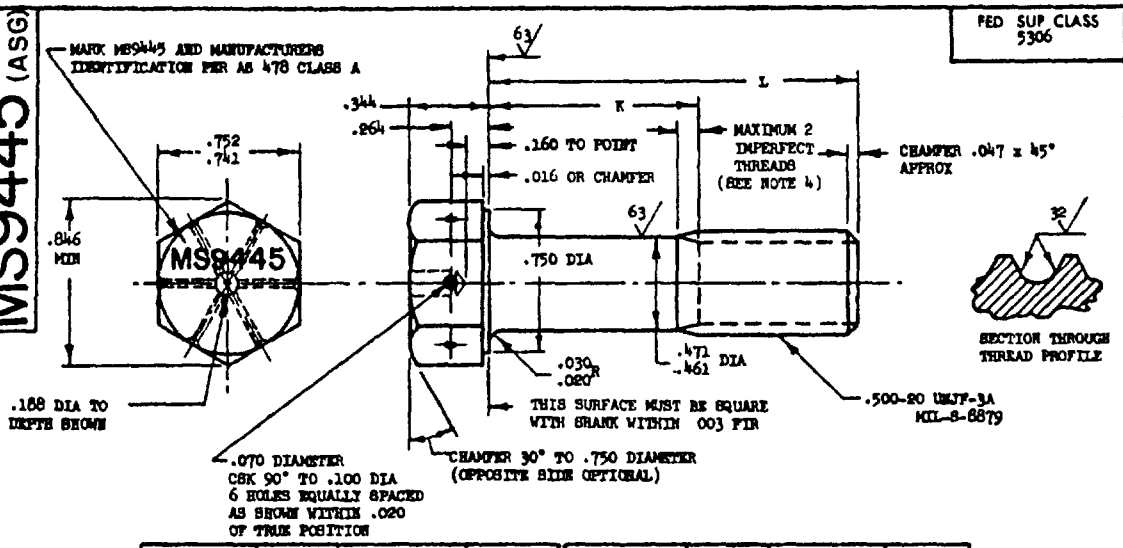

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9445-04	.812	.105- .125	8.28
MS9445-05	.875	.105- .125	8.59
MS9445-06	.938	.105- .125	8.90
MS9445-07	1.000	.105- .125	9.21
MS9445-08	1.062	.105- .125	9.52
MS9445-09	1.125	.105- .125	9.82
MS9445-10	1.188	.105- .125	10.12
MS9445-11	1.250	.105- .125	10.42
MS9445-12	1.312	.105- .125	10.73
MS9445-13	1.375	.125- .145	11.03
MS9445-14	1.438	.128- .188	11.33
MS9445-15	1.500	.190- .250	11.63
MS9445-16	1.562	.252- .312	11.93
MS9445-17	1.625	.315- .375	12.24
MS9445-18	1.688	.378- .438	12.54
MS9445-19	1.750	.440- .500	12.84
MS9445-20	1.875	565- .625	13.44
MS9445-21	2.000	.690- .750	14.05
MS9445-22	2.125	.815- .875	14 65
MS9445-23	2.250	.940-1.000	15 26
MS9445-24	2.375	1.065-1.125	15.86
MS9445-25	2.500	1.190-1.250	16.47
MS9445-26	2.625	1 315-1 375	17.07
MS9445-27	2.750	1 440-1.500	17 67
MS9445-28	2.875	1 565-1.625	18.28
MS9445-29	3 000	1.690-1 750	18 88
MS9445-30	3.125	1.815-1.875	19 49

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9445-31	3 250	1.940-2.000	20.09
MS9445-32	3 375	2.065-2.125	20.70
MS9445-33	3 500	2.190-2.250	21.30
MS9445-34	3.625	2 315-2 375	21.90
MS9445-35	3.750	2.440-2 500	22 51
MS9445-36	3.875	2.565-2.625	23.11
MS9445-37	4.000	2.690-2.750	23.72
MS9445-38	4.125	2.815-2.875	24.32
MS9445-39	4.250	2 940-3.000	24.92
MS9445-40	4.375	3.065-3.125	25.53
MS9445-41	4.500	3.190-3.250	26.13
MS9445-42	4.625	3.315-3.375	26.74
MS9445-43	4.750	3.440-3.500	27.34
MS9445-44	4.875	3.565-3.625	27.95
MS9445-45	5.000	3.690-3.750	28.55
MS9445-46	5.125	3.815-3.875	29.15
MS9445-47	5.250	3.940-4.000	29.76
MS9445-48	5.375	4.065-4.125	30.36
MS9445-49	5.500	4.190-4.250	30.97
MS9445-50	5.625	4.315-4.375	31.57
MS9445-51	5.750	4 440-4 500	32.18
MS9445-52	5.875	4.565-4 625	32 78
MS9445-53	6.000	4 690-4.750	33.38

1. SHANK SHALL BE STRAIGHT WITHIN .002 FIR PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET AREA
5. MATERIAL STEEL AMS 6304
6. HARDNESS ROCKWELL C42-46
7. FINISH DIFFUSED NICKEL-CADMIUM PLATE AMS 2416 DIMENSIONS SPECIFIED ARE AFTER PLATING CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING
8. MANUFACTURING SPECIFICATION AMS 7455 PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING
9. SURFACE ROUGHNESS AS 291, UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON.
10. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED
11. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES; LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
12. TRUE POSITION TOLERANCES SPECIFIED ARE FOR MAXIMUM MATERIAL CONDITION
13. DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SAE PUBLICATIONS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 21 DEC 62 REVISED

P.A USAF - AFSC Other Cust NAVY - WEP	TITLE BOLT, MACHINE - STEEL AMS 6304, DIFFUSED NICKEL-CADMIUM PLATED, HEXAGON HEAD, DRILLED, .500-20 UNJF-3A	MILITARY STANDARD MS9445 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:17Z
Check the source to verify that this is the current version before use.