
FED. SUP CLASS
4730

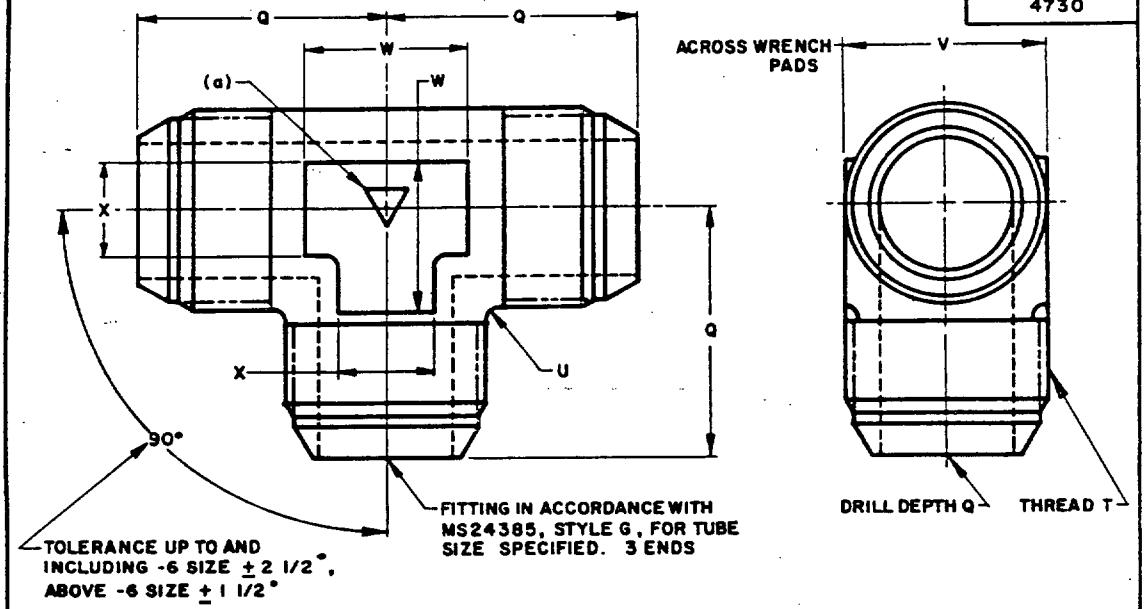

(a) MARK EACH WRENCH PAD WITH AN EQUILATERAL TRIANGLE TO DENOTE PRECISION TYPE. MARKING SHALL BE DEPRESSED .025 +.010.

MATERIAL: STEEL; ALUMINUM ALLOY; CORROSION RESISTANT STEEL (CRES); TITANIUM ALLOY; BARS, SHAPES, OR FORGINGS (SEE PROCUREMENT SPECIFICATION).

FINISH: SEE PROCUREMENT SPECIFICATION.

NO CODE LETTER IN PART NUMBER FOR STEEL.

ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (EXCEPT 7075-T73).

ADD J IN PLACE OF DASH FOR CRES, TYPE 304.

ADD K IN PLACE OF DASH FOR CRES, TYPE 316.

ADD S IN PLACE OF DASH FOR CRES, TYPE 347.

ADD T IN PLACE OF DASH FOR TITANIUM ALLOY.

ADD W IN PLACE OF DASH FOR 7075-T73 ALUMINUM ALLOY.

TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

EXAMPLE OF PART NUMBERS:

MS24402-8 - TEE, 1/2 TUBING, STEEL.
MS24402D8 - TEE, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
MS24402J8 - TEE, 1/2 TUBING, CRES, TYPE 304.
MS24402K8 - TEE, 1/2 TUBING, CRES, TYPE 316.
MS24402S8 - TEE, 1/2 TUBING, CRES, TYPE 347.
MS24402T8 - TEE, 1/2 TUBING, TITANIUM ALLOY.
MS24402W8 - TEE, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1/2°.

IN ADDITION TO THE SAMPLING REQUIREMENTS OF THE PROCUREMENT SPECIFICATION, THE SURFACE OF THE CONE ENDS ON 100Z OF THE TEES OF A LOT SHALL BE INSPECTED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 6 MAR 58 REVISED (A) 10 FEB 67 (B) 16 JUN 78 (C) 22 MAR 79 (D) 16 Apr 22

(D) DENOTES CHANGES

P.A. AIR FORCE - 99 (D) Other Cust AIR FORCE - 99	TITLE TEE, TUBE, PRECISION TYPE	MILITARY STANDARD MS24402
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES: ~~AN824~~ (D)	SHEET 1 OF 2

DD FORM 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-F282

User activities:
Review activities: ARMY - ME, AV
NAVY - AS
DSC - CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

DASH NO.	TUBING OD	THREAD T (REF)	Q +3/64 -0	U RAD	V ±.015	W APPROX	X APPROX
2	1/8	5/16-24UN.1F-3A	47/64	1/16	5/16	5/16	3/16
3	3/16	3/8 -24UN.1F-3A	51/64		3/8	3/8	1/4
4	1/4	7/16-20UN.1F-3A	55/64		7/16		
5	5/16	1/2 -20UN.1F-3A	59/64		1/2	15/32	5/16
6	3/8	9/16-18UN.1F-3A	1- 1/32	3/32	9/16	1/2	
8	1/2	3/4 -16UN.1F-3A	1- 7/32		3/4	11/16	7/16
10	5/8	7/8 -14UN.1F-3A	1-27/64	1/8	7/8	25/32	
12	3/4	1-1/16-12UN.1 -3A	1- 5/8		1-1/16	29/32	1/2
16	1	1-5/16-12UN.1 -3A	1-25/32		1-5/16	1- 3/32	5/8
20	1-1/4	1-5/8 -12UN.1 -3A	2- 1/32		1-5/8	1- 5/16	3/4
24	1-1/2	1-7/8 -12UN.1 -3A	2-19/64		1-7/8	1- 1/2	7/8
28	1-3/4	2-1/4 -12UN.1 -3A	2-25/32		2-1/4	1-25/32	1-1/16
32	2	2-1/2 -12UN.1 -3A	3- 1/32	3/16	2-9/16	2- 1/32	1-3/16

APPROVED 6 MAR 58 REVISED D FOR CHANGES SEE PAGES 1 & 2. 16 Apr 82

User activities:

Review activities: ARMY - ME, AV
NAVY - AS
DSC - CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

P.A. AIR FORCE - 99 (D) Other Case AIR FORCE - 99	TITLE TEE, TUBE, PRECISION TYPE	MILITARY STANDARD MS24402	
PROCUREMENT SPECIFICATION MIL - F - 5509	SUPERSEDES: ~~AN824~~ (D)	SHEET 2 OF 2	

DD FORM 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-F282

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.