REVIEWER SYMBOLS:
ARMY - AT, MI
NAVY -
USAF -

USER SYMBOLS:
ARMY - AV, ME, MU
NAVY - NC, SH
USAF -

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5330

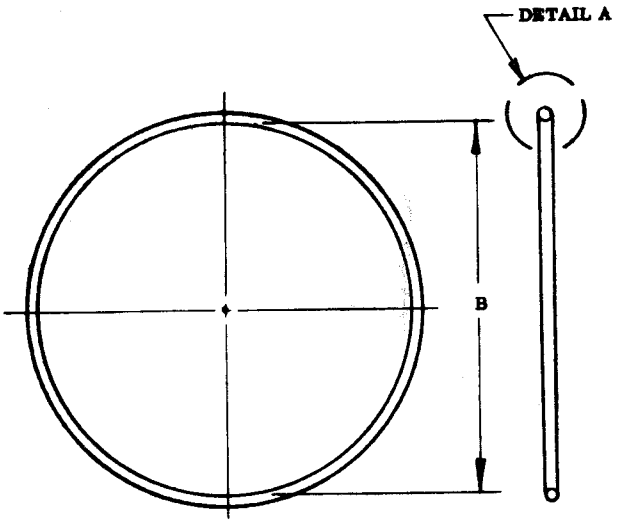

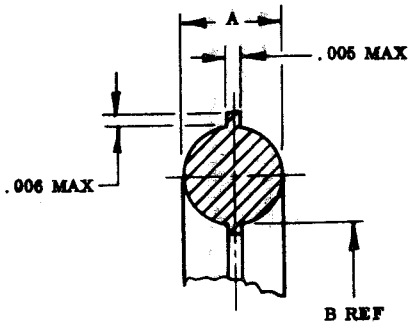

DETAIL A

DASH NO.	A ±.003 DIA	B +.010 -.015 DIA
-8	.031	.328
-10		.406
-12		.531
-14		.641
-16		.781
-18		.906
-20		.984
-22		1.109
-24		1.234
-28	.047	1.453
-32		1.672
-36		1.891
Ⓐ -38	.103	.362
-40		.424
-42		.487
-44		.549
-46		.612
-48		.674

NOTES:

1. MATERIAL: SYNTHETIC RUBBER IN ACCORDANCE WITH AMS3209.
2. DIMENSIONS IN INCHES. DIMENSIONING IN ACCORDANCE WITH USAS Y14.5-1966.
3. PACKING TO BE LUBRICATED WITH MIL-S-8660 SILICONE COMPOUND, PRIOR TO INSTALLATION.
4. THIS PACKING IS FOR USE WITH ENVIRONMENT RESISTANT CLASSES OF ELECTRIC CONNECTORS, SUCH AS CLASSES R AND F OF MS3106 AND MS3108. IT IS NOT INTENDED FOR USE IN FLUID SYSTEMS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓐ DENOTES CHANGES

APPROVED 17 DEC 58 REVISED Ⓐ 1 May 1986

P.A. NAVY - AS Other Cust ARMY - EL USAF - 11	TITLE PACKING, PREFORMED, FOR ELECTRICAL USE	MILITARY STANDARD MS28900
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

PROJECT NO. 5330-0645

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.