
FED. SUP CLASS
2330

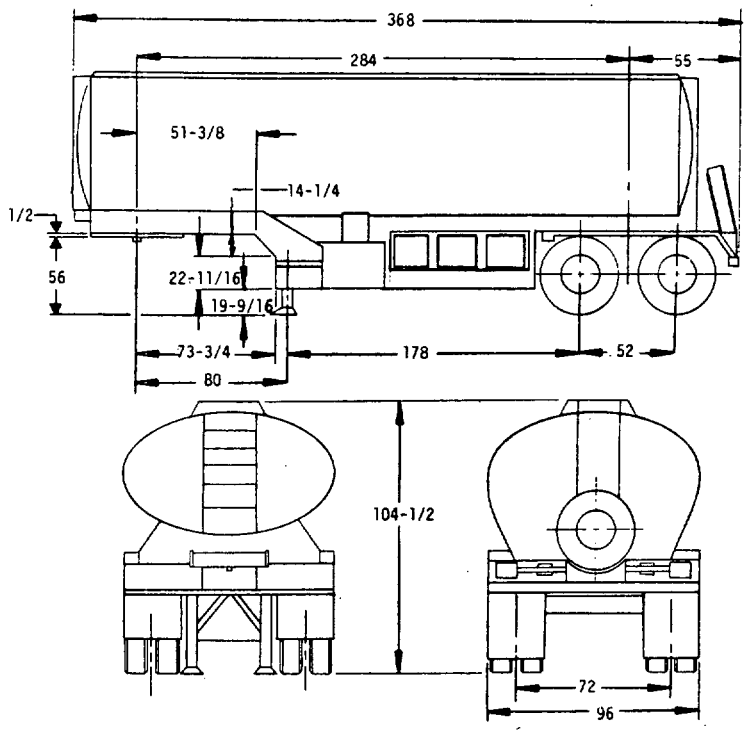

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distrubution is unlimited.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS 52156-1	8750005

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, TANK: 5000 GAL, FUEL DISPENSING, UNDER/OVERWING, M970.	MILITARY STANDARD MS52156(AT)
PROCUREMENT SPECIFICATION MIL-S-62180	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR 5 TON, 6 X 6 M818 SERIES

CURBWEIGHT: (WO/PAYLOAD) 16,810 LBS
PAYLOAD (FUEL @ 6.79 LBS/GAL. LOADED (3800) 25,800 LBS

GROSS WEIGHT: (W/PAYLOAD) LOADED (3800) 42,610 LBS

WEIGHT DISTRIBUTION: (TRAILER W/M818)

NO LOAD:

FRONT AXLE, TRACTOR M818	10,170 LBS
REAR BOGIE, TRACTOR M818	15,170 LBS
KINGPIN, SEMITRAILER	5,320 LBS
REAR BOGIE, SEMITRAILER	11,490 LBS

GROSSWEIGHT OF TRACTOR: (M818), SEMITRAILER, W/O PAYLOAD 36,830 LBS

GROSSWEIGHT OF TRACTOR: (M818) SEMITRAILER W/PAYLOAD (500 GAL) 71,590 LBS

CENTER OF GRAVITY:	VERTICAL	HORIZONTAL FROM KINGPIN
EMPTY	40	211
LOADED	64	187-1/2

DEPARTURE ANGLE: 60
FORDING DEPTH: 24 IN. MAX

MILITARY VEHICLE CLASSIFICATION:

	EMPTY	LOADED	HIGHWAY
M818	15	26	30
M970	7	19	22

ELECTRICAL SYSTEM: - VEHICLE VOLTAGE 24 VOLT

AXLE TYPE: FULL FLOATING TANDEM 18,000 LB CAPACITY

BRAKES: SERVICE QTY; 4 ACTUATION; AIR/WEDGE (2 PER AXLE END) 75-95 PSI

LANDING LEG: ADJUSTABLE, CRANK OPERATED

DESCRIPTION:

THE M970 IS A 5000 GALLON FUEL DISPENSING SEMITRAILER DESIGNED FOR UNDER/OVERWING REFUELING OF AIRCRAFT. THE M970 CAN BE LOADED THROUGH THE BOTTOM OR THE TOP FILL OPENING. THE4-CYLINDER DIESEL ENGINE AND PUMP ASSEMBLY PROVIDE SELF LOAD/UNLOAD CAPABILITY.

THE TRAILER HAS A STAINLESS STEEL, SINGLE COMPARTMENT TANK OF 5000 GALLON CAPACITY, PLUS 3% CAPACITY FOR PRODUCT EXPANSION. THE CHASSIS IS OF WELDED STEEL CONSTRUCTION AND EQUIPPED WITH FULL TANDEM AXLES AND MANUALLY OPERATED LANDING GEAR.

THE M970 IS EQUIPPED WITH PRESSURE AND VACUUM VENTS, HOSE TROUGHS, SEALED MANHOLE, CALIBRATED GAUGE, BULK FUEL HOSES, PORTABLE GROUNDING ROD, STATIC GROUND REEL, AND SPARE TIRE. A LADDER IS PROVIDED AT THE FRONT OF THE SEMITRAILER FOR ACCESS TO THE TOP MANHOLE. A VAPOR RECOVERY SYSTEM, REQUIRED IN CERTAIN AREAS, CAN BE INSTALLED ON THE M970.

SHIPPING DATA:

CUBIC FEET	2200
SQUARE FEET	250
LENGTH	368 IN
WIDTH	96 IN
HEIGHT	104-1/2 IN
HEIGHT (REDUCIBLE) BY DEFLATING TIRE	102 IN

TIRES:

SIZE	11.00 X 20 -12 PLY
TREAD	NDCC
QUANTITY	8 + 1 SPARE
PRESSURE	75 TO 95 PSI

ELECTRIC SYSTEM:-ENGINE

TYPE	12 V DIRECT CURRENT
ALTERNATOR	65 AMPS, BELT DRIVE
BATTERY (2)	12 V,, CONNECTED IN PARALLEL

ENGINE:

TYPE (ONAN) 4 CYL, 4 CYCLE, DIESEL, AIR COOLED	
HORSEPOWER	27.5
BORE	3.25
STROKE	3.625

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS 52156-1	8750005

P.A. ARMY-AT Other Cust	TITLE SEMITRAILER, TANK: 5000 GAL, FUEL DISPENSING, UNDER/OVERWING, M970.	MILITARY STANDARD MS52156(AT)
PROCUREMENT SPECIFICATION MIL-S-62180	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.