
FED. SUP CLASS 2320

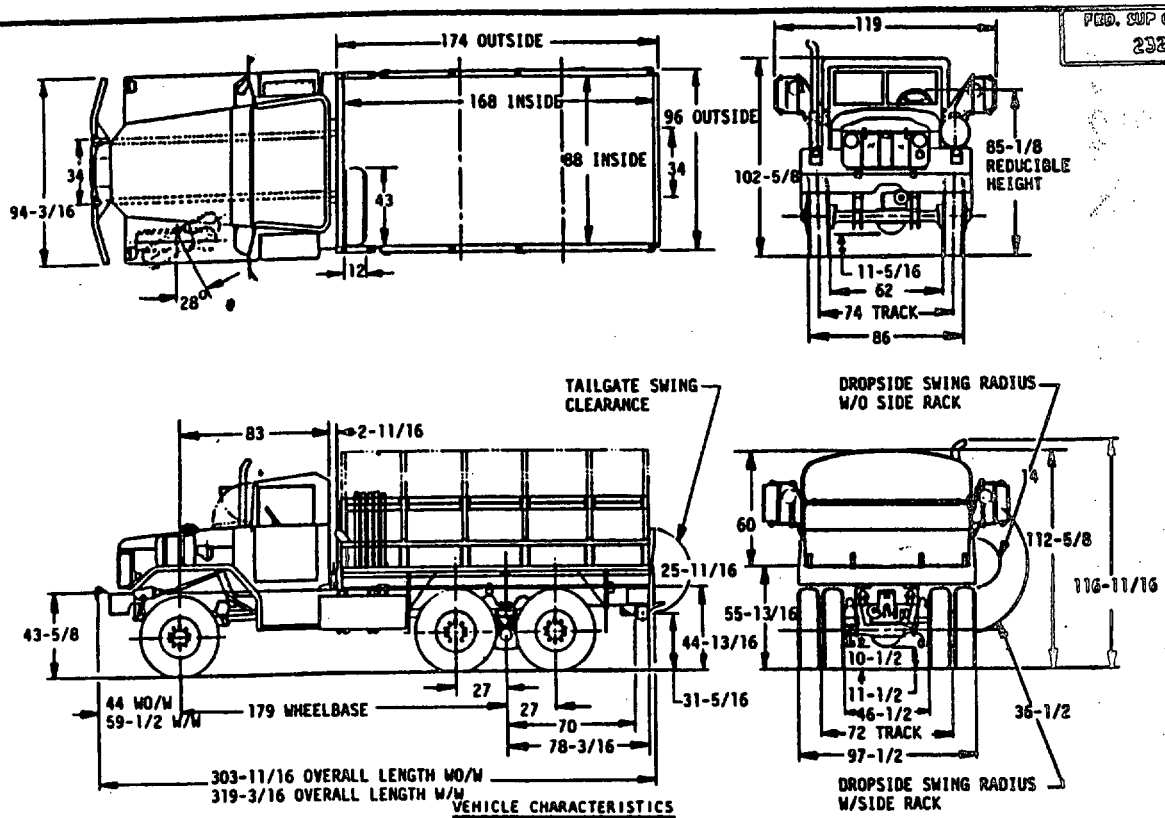

VEHICLE CHARACTERISTICS

CURB WEIGHT FULLY EQUIPPED LESS PAYLOAD & CREW:	WO/W	W/W
FRONT	9,070 LBS	9,855 LBS
REAR BOGIE	11,385 LBS	11,265 LBS
TOTAL	20,455 LBS	21,120 LBS
PAYLOAD:	10,000 LBS	10,000 LBS
GROSS WEIGHT FULLY EQUIPPED WITH PAYLOAD, LESS CREW:		
FRONT	9,350 LBS	10,135 LBS
REAR BOGIE	21,105 LBS	20,985 LBS
TOTAL	30,455 LBS	31,120 LBS
TOWED LOAD ALLOWANCE:	15,000 LBS	15,000 LBS
MAXIMUM VERTICAL LOAD ON PINTLE:	1,500 LBS	1,500 LBS
SHIPPING DIMENSIONS: CUBIC FEET	1,458	1,533
SQUARE FEET	206	216

FORDING DEPTH: 30 INCHES FOR 15 MIN
WITH FORDING KIT 11664533
DEPTH 78 INCHES FOR 15 MINUTES
TIEDOWN KIT QTY 4 8389670
WINTERIZATION KIT PERSONNEL HEATER 11648556
WATER PERSONNEL HEATER 11648557
THERMAL BARRIER KIT 11648752
WINTERIZATION POWER PLANT KIT 1164858
CLOSURE HARDTOP KIT 7354276

CENTER OF GRAVITY: (AT CURB WEIGHT)	WO/W	W/W
ABOVE GROUND	40	40-1/2
REAR OF CENTERLINE OF FRONT AXLE	99-5/8	95-1/2
CENTER OF GRAVITY: (W/PAYLOAD) ABOVE GROUND	49-13/16	50-5/16
REAR OF CENTERLINE OF FRONT AXLE	124	120-11/16

PERFORMANCE:
AT GROSS WEIGHT W/O TOWED LOAD
MAXIMUM SPEED 52 MPH
MAXIMUM GRADE 60+%
CRUISING RANGE 350 MILES
AT GROSS WEIGHT W/TOWED LOAD
MAXIMUM SPEED 52 MPH
MAXIMUM GRADE 55%
CRUISING RANGE 300 MILES

BODY: 11593373
THIS CARGO BODY IS THE SAME AS THAT IS OF THE M813 EXCEPT FOR THE DROPSIDE FEATURE. THE DROPSIDES AND TAILGATE ARE INTERCHANGEABLE WITH THE 2-1/2 TON TRUCK, M35A2C WITH DROPSIDES. REMOVABLE SIDE RACKS AND TROOP SEATS ARE PROVIDED. KIT WITH TARP BOWS, TARPAULIN, AND END FLAPS AVAILABLE.

OVE:
BASIC ISSUE ITEMS 12300877
ADDITIONAL AUTHORIZED ITEMS 12300988
ACCESSORY SUPPLEMENTAL KITS 12300925

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

MS PART NO.	ENGINEERING DWG NO.	
MS52182-1	8736853	WITH WINCH
MS52182-2	8736854	LESS WINCH

Ⓐ INACTIVE FOR DESIGN AFTER 14 APRIL 1989

APPROVED 3 MAY 85 REVISED Ⓐ 14 APRIL 1989

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. ARMY - AT Other Cust	INTERNATIONAL INTEREST	TITLE: TRUCK, CARGO: DROPSIDE, 5 TON, 6x6, M813A1	MILITARY STANDARD MS52182(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

2320-A411

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22:41
Check the source to verify that this is the current version before use.