


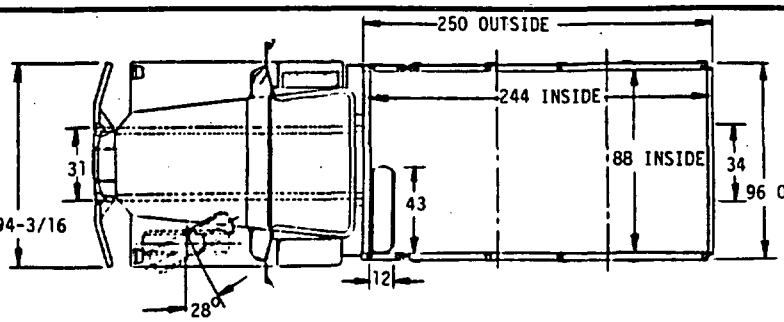


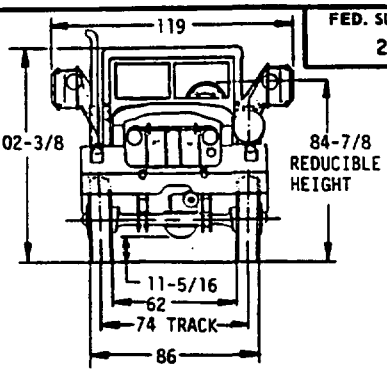

FED. SUP CLASS
2320

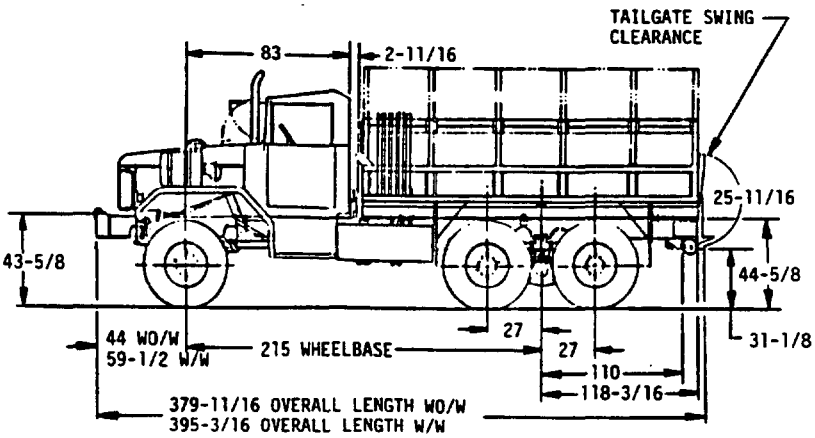

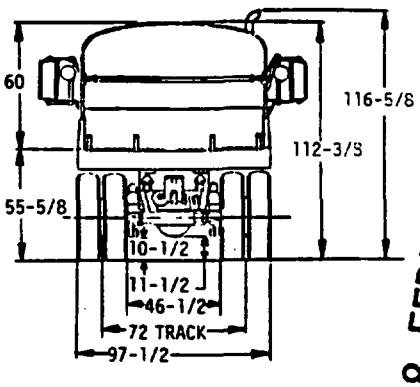

VEHICLE CHARACTERISTICS

CURB WEIGHT FULLY EQUIPPED LESS PAYLOAD & CREW:	W/O W	W/W
FRONT	9,235 LBS	10,000 LBS
REAR BOGIE	13,640 LBS	13,540 LBS
TOTAL	22,875 LBS	23,540 LBS
PAYLOAD:	10,000 LBS	10,000 LBS
GROSS WEIGHT FULLY EQUIPPED WITH PAYLOAD, LESS CREW:		
FRONT	9,280 LBS	10,000 LBS
REAR BOGIE	23,595 LBS	23,495 LBS
TOTAL	32,875 LBS	33,540 LBS
TOWED LOAD ALLOWANCE:	15,000 LBS	15,000 LBS
MAXIMUM VERTICAL LOAD ON PINTLE:	1,500 LBS	1,500 LBS
SHIPPING DIMENSIONS:		
CUBIC FEET	1,823	1,898
SQUARE FEET	257	268

FORDING DEPTH: 30 INCHES FOR 15 MIN
WITH FORDING KIT 11664533
DEPTH 78 INCHES FOR 15 MINUTES
TIEDOWN KIT QTY 6 8389583
WINTERIZATION KIT PERSONNEL HEATER 11648556
WATER PERSONNEL HEATER 11648557
THERMAL BARRIER KIT 11648752
WINTERIZATION POWER PLANT KIT 1164858
CLOSURE HARDTOP KIT 7354276

CENTER OF GRAVITY: (AT CURB WEIGHT)	W/O W	W/W
ABOVE GROUND	38-1/8	38-5/8
REAR OF CENTERLINE OF FRONT AXLE	128-3/16	123-11/16
CENTER OF GRAVITY: (W/PAYLOAD)		
ABOVE GROUND	61-1/8	61-5/8
REAR OF CENTERLINE OF FRONT AXLE	154-5/16	150-5/8

PERFORMANCE:
AT GROSS WEIGHT W/O TOWED LOAD
MAXIMUM SPEED 52 MPH
MAXIMUM GRADE 60+%
CRUISING RANGE 350 MILES
AT GROSS WEIGHT W/TOWED LOAD
MAXIMUM SPEED 52 MPH
MAXIMUM GRADE 52%
CRUISING RANGE 300 MILES

BODY: 10871358
744 CU FT OF CARGO SPACE, WELDED STEEL FLAT BED, REMOVABLE SIDE RACKS, TROOP SEATS, AND HINGED TAILGATE ARE PROVIDED. KIT WITH TARP BOWS, TARPAULIN AND END FLAPS PROVIDED.

ACCESSORY SUPPLEMENTAL KITS: 12300925

OVE:
BASIC ISSUE ITEMS 12300877
ADDITIONAL AUTHORIZED ITEMS 12300988

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

INACTIVE FOR NEW DESIGN AFTER 8 FEBRUARY 1989
NO SUPERSEDING STANDARD.
Ⓐ

MS PART NO.	ENGINEERING DWG NO.	
MS52183-1	8736866	WITH WINCH
MS52183-2	8736867	LESS WINCH

APPROVED 3 MAY 85 REVISED Ⓐ 8 FEB 1989

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY - AT Other Cust	INTERNATIONAL INTEREST	TITLE
		TRUCK, CARGO: 5 TON, 6x6, M814.

MILITARY STANDARD
MS52183(AT)

PROCUREMENT SPECIFICATION MIL-T-740
SUPERSEDES:
SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.