METRIC


MIL-W-70336/5
27 June 1990

MILITARY SPECIFICATION SHEET

WASHER, LOCK, EXTERNAL TOOTH (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation:
MIL-W-70336

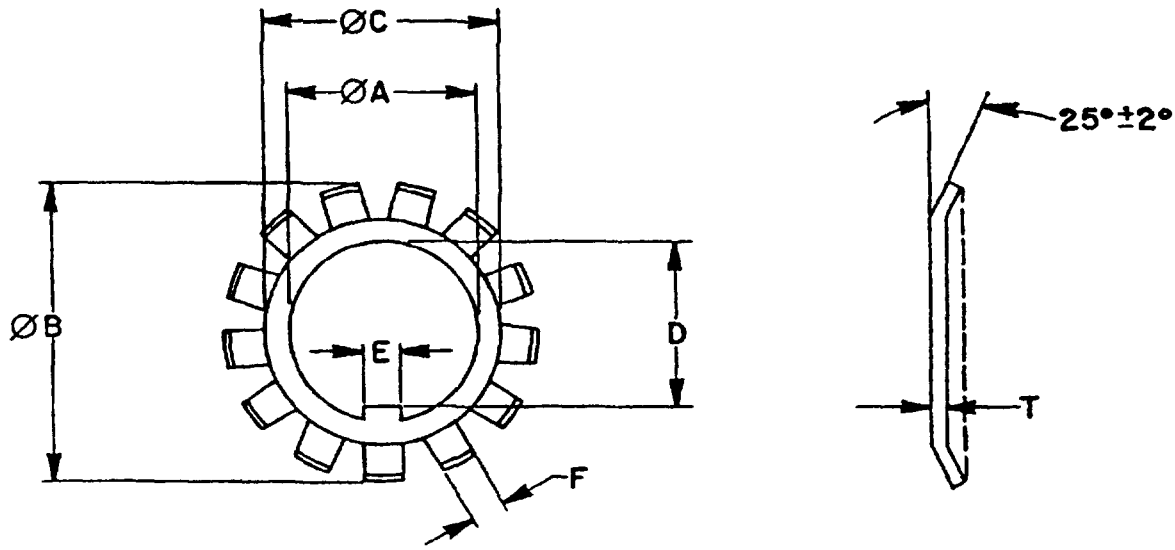

Note: All dimensions are in millimeters.

FIGURE 1. WASHER, LOCK, EXTERNAL TOOTH (METRIC)

DISTRIBUTION STATEMENT A. Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:24Z
Check the source to verify that this is the current version before use.

Requirements

1. Material. Carbon Steel, Grades 1050 thru 1095 (UNS G10500 thru UNS G10950) in accordance with ASTM A510M as applicable.

2. Hardness. Hardness shall be 40-50 HRC.

3. Remove all burrs and sharp edges.

4. Part number. The part number shall consist of the letter "D" the basic number of the specification sheet, and a dash number from Table I.

Example: D70336/5-01

- Dash number from Table I.
- Specification sheet number

D70336/5-01 Indicates - Washer, Lock, External Tooth, 10.07mm ID, 21.00mm OD, and 1mm thick, metric

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:24Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	SHAFT SIZE	ØA INSIDE DIA MIN	ØA INSIDE DIA MAX	ØB OUTSIDE DIA (MAX)	ØC MIN	ØC MAX	E (MAX)	D MIN	D MAX	F (MAX)	T MIN	T MAX	NO OF TABS (MIN)
01	10	10.07	10.17	21.00	13.50	14.00	3.00	8.57	8.67	3.00	0.90	1.10	9
02	12	12.08	12.20	25.00	17.00	17.50	3.00	10.58	10.70	3.00	0.90	1.10	11
03	15	15.08	15.20	28.00	21.00	21.50	4.00	13.58	13.70	4.00	0.90	1.10	11
04	17	17.08	17.20	32.00	24.00	24.50	4.00	15.58	15.70	4.00	0.90	1.10	11
05	20	20.09	20.24	36.00	26.00	26.50	4.00	18.59	18.74	4.00	0.90	1.10	11
06	25	25.09	25.24	42.00	32.00	32.50	5.00	23.09	23.24	5.00	1.15	1.35	13
07	30	30.09	30.24	49.00	38.00	38.50	5.00	27.59	27.74	5.00	1.15	1.35	13
08	35	35.11	35.28	57.00	44.00	44.50	6.00	32.61	32.78	6.00	1.15	1.35	13
09	40	40.11	40.28	62.00	50.00	50.50	6.00	37.61	37.78	6.00	1.15	1.35	13
10	45	45.12	45.29	69.00	56.00	56.50	6.00	42.62	42.79	6.00	1.15	1.35	13
11	50	50.12	50.29	74.00	61.00	61.50	6.00	47.62	47.79	6.00	1.15	1.35	13
12	55	55.13	55.33	81.00	67.00	67.50	8.00	52.63	52.83	7.00	1.15	1.35	17
13	60	60.13	60.33	86.00	73.00	73.50	8.00	57.63	57.83	7.00	1.40	1.60	17
14	65	65.13	65.33	92.00	79.00	79.50	8.00	62.63	62.83	7.00	1.40	1.60	17
15	70	70.14	70.34	98.00	85.00	85.50	8.00	66.64	66.84	8.00	1.40	1.60	17
16	75	75.14	75.34	104.00	90.00	90.50	8.00	71.64	71.84	8.00	1.40	1.60	17
17	80	80.14	80.34	112.00	95.00	95.50	10.00	76.64	76.84	8.00	1.65	1.85	17
18	85	85.15	85.39	119.00	102.00	102.50	10.00	81.65	81.89	8.00	1.65	1.85	17
19	90	90.15	90.39	126.00	108.00	108.50	10.00	86.65	86.89	10.00	1.65	1.85	17
20	95	95.15	95.39	133.00	113.00	113.50	10.00	91.65	91.89	10.00	1.65	1.85	17
21	100	100.15	100.39	142.00	120.00	120.50	12.00	96.65	96.89	10.00	1.65	1.85	17
22	105	105.17	105.40	145.00	126.00	126.50	12.00	100.65	100.90	10.00	1.65	1.85	17

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:24Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NO	SHAFT SIZE	ØA INSIDE DIA MIN	ØA INSIDE DIA MAX	ØB OUTSIDE DIA (MAX)	ØC MIN	ØC MAX	E (MAX)	D MIN	D MAX	F (MAX)	T MIN	T MAX	NO OF TABS (MIN)
23	110	110.07	110.40	154.00	133.00	133.50	12.00	105.67	105.90	12.00	1.65	1.85	17
24	115	115.17	115.40	159.00	137.00	137.50	12.00	110.67	110.90	12.00	1.90	2.10	17
25	120	120.17	120.40	164.00	138.00	138.50	14.00	115.17	115.40	12.00	1.90	2.10	17
26	125	125.18	125.45	170.00	148.00	148.50	14.00	120.17	120.40	12.00	1.90	2.10	17
27	130	130.18	130.45	175.00	149.00	149.50	14.00	125.18	125.45	12.00	1.90	2.10	17
28	135	135.18	135.45	185.00	160.00	160.50	14.00	130.18	130.45	14.00	1.90	2.10	17
29	140	140.18	140.45	192.00	160.00	160.50	16.00	135.18	135.45	14.00	1.90	2.10	17
30	145	145.20	145.46	202.00	171.00	171.50	16.00	140.18	140.45	14.00	1.90	2.10	17
31	150	150.20	150.46	205.00	171.00	171.50	16.00	145.20	145.46	14.00	1.90	2.10	17
32	155	155.20	155.46	212.00	182.00	182.50	16.00	147.70	147.96	16.00	2.40	2.60	19
33	160	160.20	160.46	217.00	182.00	182.50	18.00	154.20	154.46	16.00	2.40	2.60	19
34	165	165.21	165.48	222.00	193.00	193.50	18.00	157.70	157.96	16.00	2.40	2.60	19
35	170	170.21	170.48	232.00	193.00	193.50	18.00	164.21	164.48	16.00	2.40	2.60	19
36	180	180.21	180.48	242.00	203.00	203.50	20.00	174.21	174.48	18.00	2.40	2.60	19
37	190	190.23	190.53	252.00	214.00	214.50	20.00	184.21	184.53	18.00	2.40	2.60	19
38	200	200.23	200.53	262.00	226.00	226.50	20.00	194.21	194.53	18.00	2.40	2.60	19

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:24Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review Activities:
Army - AV, MI
Navy - SH
Air Force - 82
DLA - IS
NSA - NS

User Activities:
Army - AT, CR, ER, ME
Navy - MC

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5310-1621)

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:24Z
Check the source to verify that this is the current version before use.