MILITARY STANDARD


MIL-STD-1323-365
(NAVY)
5 MARCH 1991

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
RR-182/AL (CHAFF HEAD), AN/ALQ-190(V)1 SET
OR AN/SLQ-39 (CHAFF BUOY) IN CNU-438(V)/E CONTAINER
IN PALLET ADAPTER, ADU-702/E

UNIT LOAD DATA	RR-182/AL	AN/ALQ-190(V)1	AN/SLQ-39
DODIC/NALC	HW96	4W60	4W93
NUMBER OF ITEMS PER CONTAINER	1	1	1
NUMBER OF CONTAINERS PER ADAPTER UNIT	12	12	12
NUMBER OF ADAPTER UNITS PER UNIT LOAD	2	2	2
NUMBER OF ITEMS PER UNIT LOAD	24	24	24
GROSS WEIGHT OF ONE CONTAINER (LBS)	54	41	45
GROSS WEIGHT OF ONE ADAPTER UNIT (LBS)	708	552	600
WEIGHT OF ADAPTERS (2 AT 57 LBS) (LBS)	114	114	114
GROSS WEIGHT OF STEEL PALLET (LBS)	72	72	72
WEIGHT OF STEEL STRAPPING (LBS)	10	10	10
GROSS WEIGHT OF UNIT LOAD (LBS) △	1492	1180	1276
CUBE (CU FT)	35.4	35.4	35.4
DOT HAZARD CLASS	C	C	B
CG CLASS	III	I	II-B

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 5 UNIT LOADS HIGH IN STORAGE.

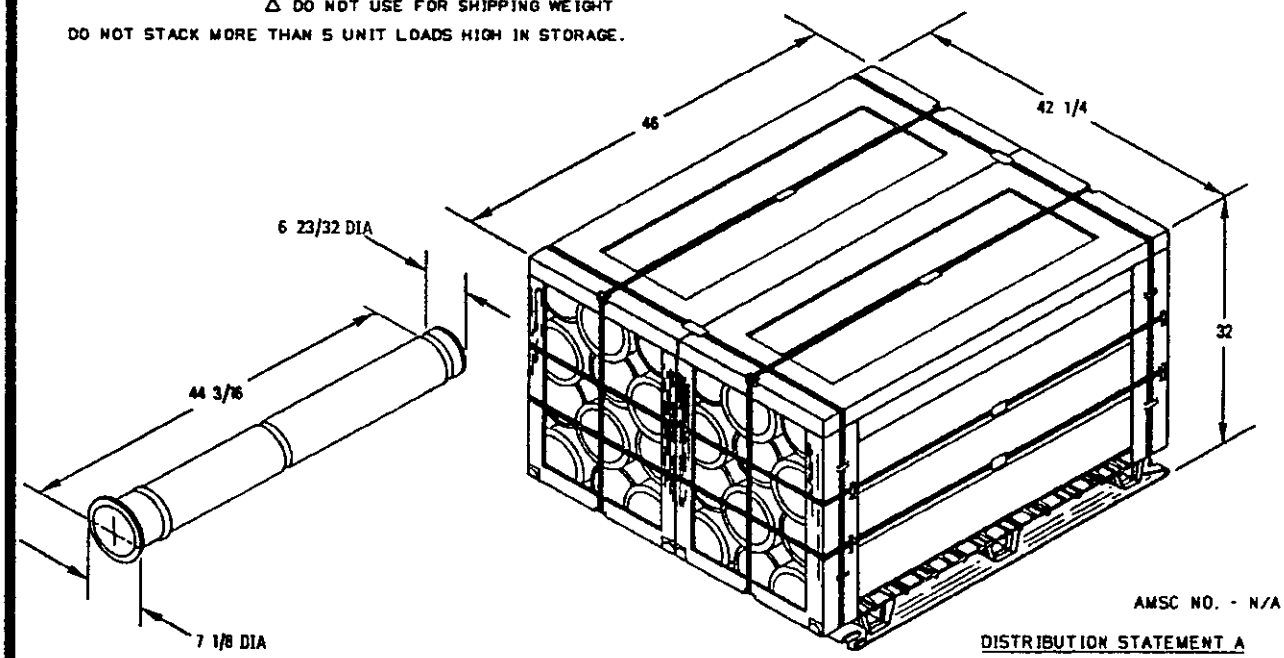

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTE:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

E. Earle 3/5/91
SIGNATURE TDA, WPNSTA EARLE DATE

3/5/91
SIGNATURE AIRSYSCOM BY DIRECTION DATE

ORIGINATOR 3/5/91 DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:00Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

(A) THREAD LONGITUDINAL STRAPS, ITEM 7, THROUGH THE DECK WIRES OF THE PALLET, ITEM 1, AS SHOWN IN DETAIL A.

(B) THREAD LATERAL STRAPS, ITEM 8, THROUGH THE SQUARE OPENINGS IN THE PALLET DECK AS SHOWN IN DETAIL A.

(C) POSITION LONGITUDINAL STRAPPING, ITEM 5, USED TO UNITIZE MODULE, ON THE PALLET DECK ABOVE STRAPPING, ITEM 7, AS SHOWN IN DETAIL B.

(D) THREAD HORIZONTAL STRAPPING, ITEM 6, THROUGH THE STRAP LOOPS OF THE FRONT AND REAR FRAMES, ITEMS 2 AND 3, AND POSITION THE FRAMES ON THE PALLET AS SHOWN IN DETAIL B.

(E) POSITION TWO CONTAINERS IN THE FRAMES WITH THEIR COVER ENDS AGAINST THE FLANGE OF THE FRONT FRAME, ITEM 2, AND THEIR BOTTOM ENDS ON THE SPACER BLOCKS OF THE REAR FRAME, ITEM 3, AS SHOWN IN DETAILS B AND C.

(F) POSITION A THIRD CONTAINER BETWEEN THE TWO CONTAINERS WITH THE COVER END AGAINST THE FLANGE OF THE REAR FRAME.

(G) POSITION THE REMAINING THREE ROWS OF CONTAINERS, ALTERNATING THE DIRECTION OF THE CONTAINERS BETWEEN ROWS, AS SHOWN IN DETAIL B.

(H) POSITION THE TOP FRAME, ITEM 4, OVER THE FRAMES AND CONTAINERS WITH WITH THE TWO SPACER BLOCK END OVER THE FRONT FRAME.

(I) POSITION STRAPPING, ITEM 5, IN THE CORNER NOTCHES AND OVER THE TOP FRAME. TENSION AND DOUBLE NOTCH THE SEAL, ITEM 9.

(J) THREAD STRAPPING, ITEM 6, THROUGH THE OUTBOARD STRAP LOOPS OF THE FRONT AND REAR FRAMES. TENSION AND DOUBLE NOTCH THE SEALS, ITEM 9.


(K) REPEAT STEPS (C) THROUGH (I) FOR THE SECOND ADAPTER UNIT.

(L) THREAD STRAPPING, ITEM 8, UP THROUGH THE STRAP LOOPS OF THE FRONT AND REAR FRAMES AND OVER THE TOP FRAMES. TENSION AND DOUBLE NOTCH THE SEALS, ITEM 9.

(M) POSITION STRAPPING, ITEM 7, TO SECURE LOAD TO PALLET, OVER THE ADAPTER UNIT STRAPPING, ITEM 5. TENSION AND DOUBLE NOTCH THE SEALS, ITEM 9.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323 (NAVY).

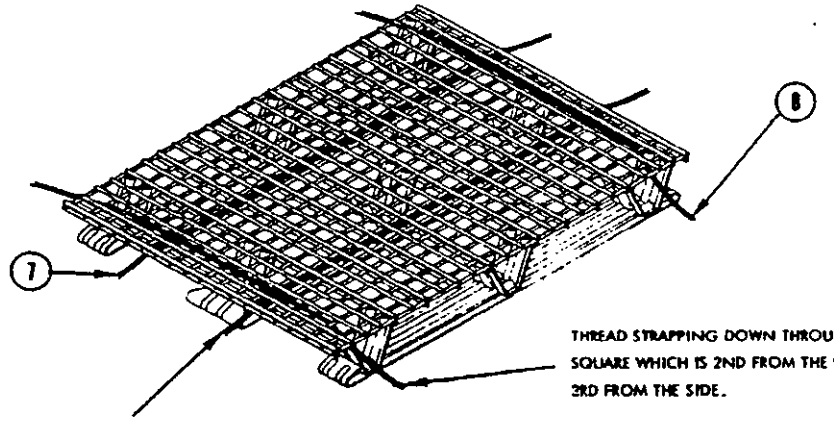

DETAIL A

DEUNITIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING, ITEM 7 AND 8

CAUTION

DO NOT CUT ADAPTER UNIT STRAPPING, ITEMS 5 AND 6, IF THE ADAPTER UNITS ARE TO BE HANDLED/TRANSFERRED BEFORE REMOVING THE CONTAINERS.

(B) CUT AND REMOVE THE ADAPTER UNIT STRAPPING ITEMS 5 AND 6.

(C) REMOVE TOP FRAME.

(D) REMOVE CONTAINERS.

(E) REMOVE FRONT AND REAR FRAMES.

NOTES:

ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE BASIC DOCUMENT, MIL-STD-1323 (NAVY).

DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
10	9	SEAL	STEEL	3/4
2	8	LATERAL STRAP	STEEL	3/4 X .035 X 13 FT
2	7	LONGITUDINAL STRAP	STEEL	3/4 X .035 X 14 FT
4	6	HORIZONTAL STRAP	STEEL	3/4 X .035 X 12 FT 6
2	5	LONGITUDINAL STRAP	STEEL	3/4 X .035 X 14 FT
2	4	FRAME, TOP (ADAPTER ADU-702/E)	1050AS331	46 X 21 1/8 X 2
2	3	FRAME, REAR (ADAPTER ADU-702/E)	1050AS333	20 5/8 X 6 1/2 X 27
2	2	FRAME, FRONT (ADAPTER ADU-702/E)	1050AS332	20 5/8 X 6 1/2 X 27
1	1	PALLET, MK 12 MOD 1	2645217	35 X 45 1/2 X 4 3/4

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:00Z
Check the source to verify that this is the current version before use.


NOTE

END FRAMES MAY NEED SUPPORT DURING LOADING (SEE STEPS e, f, AND g) TO PREVENT TOPPLING.

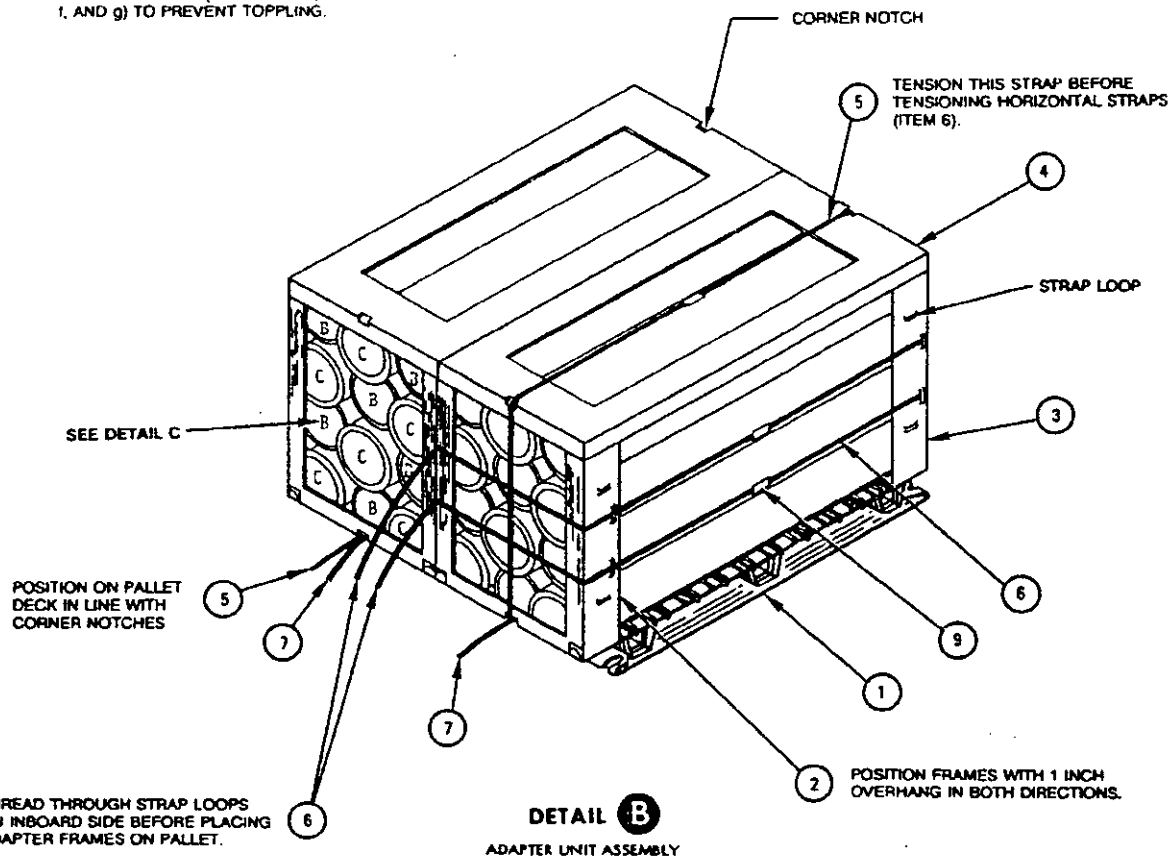

DETAIL B

ADAPTER UNIT ASSEMBLY

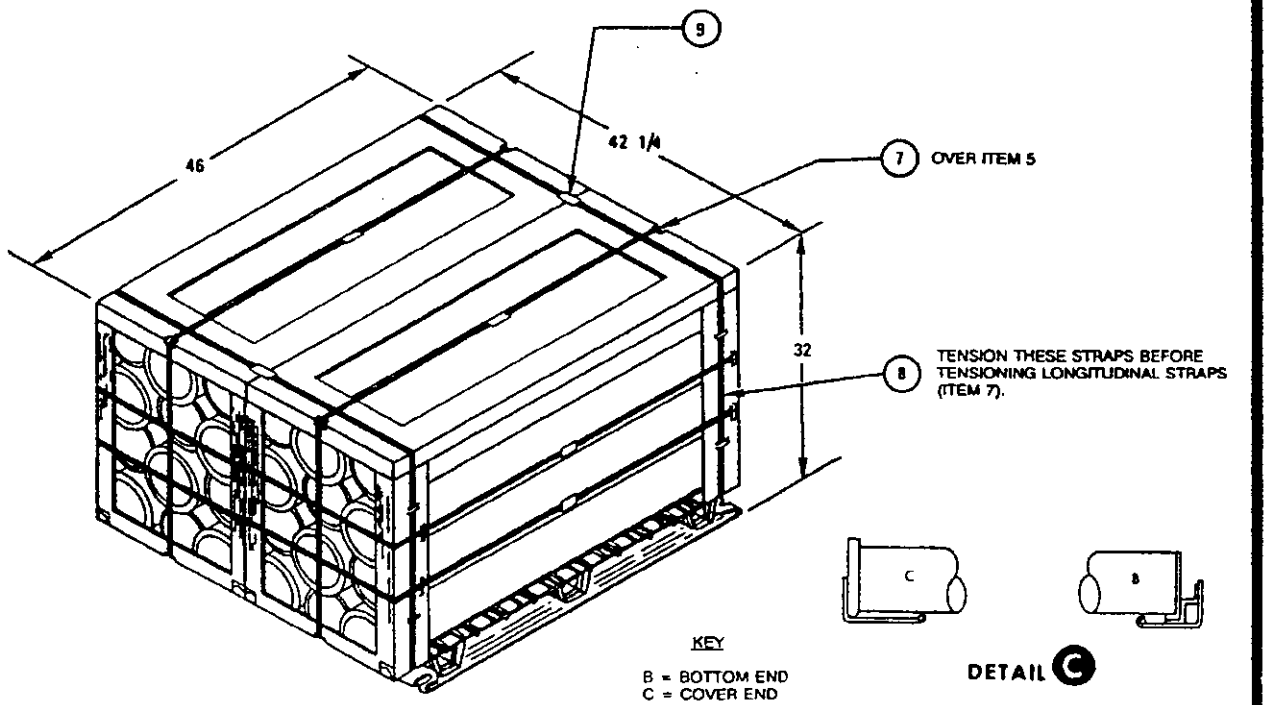

KEY

B = BOTTOM END
C = COVER END

DETAIL C

POSITIONING OF END FRAMES

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:00Z
Check the source to verify that this is the current version before use.