|INCH-POUND|


MIL-G-83528/2B
10 July 1992
SUPERSEDING
MIL-G-83528/2A
9 September 1988

MILITARY SPECIFICATION SHEET

GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRICAL, EMI/RFI
O-RING, STANDARD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-G-83528.

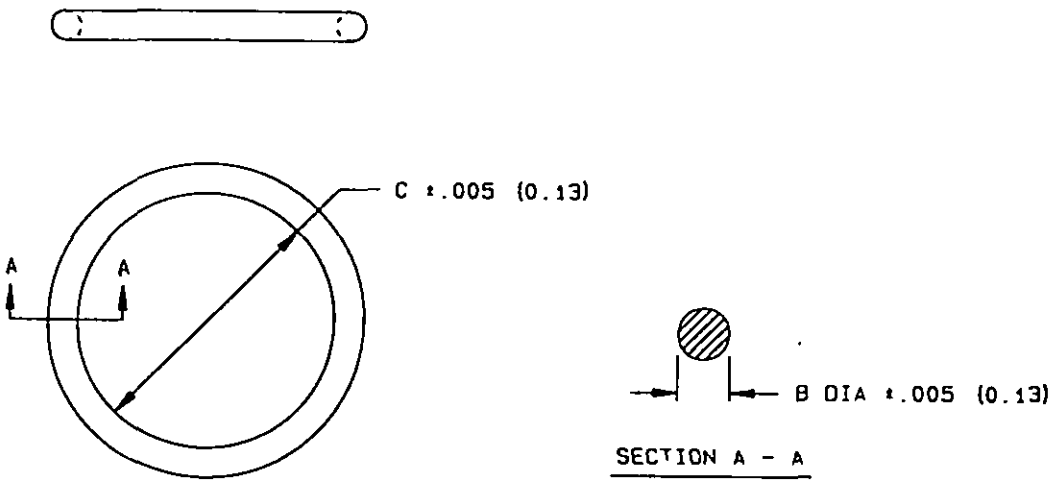


(B) NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Tolerance on flash shall be ±.008 (0.20 mm) on the extension and ±.005 (0.13 mm) on the thickness.

FIGURE 1. EMI/RFI O-ring gaskets.

(B) denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(B) Design and construction: See figure 1 and table I. Gaskets described herein are conductive versions of O-rings covered by MS-9021.

(B) Material: Type A, B, C, D, E, F, H, J, K, L, or M.

(B) Part or Identifying Number (PIN): See table I.

Supersession information: See table II.

(B) TABLE I. Dimensions.

| PIN 1/ M83528/002X | Dimension B 2/ 3/ 4/ | Dimension C 2/ 4/ 5/ | Cross section area ($cm^2$) 6/ |
|---|---|---|---|
| 007 | .070 (1.78) | .145 (3.68) | .025 |
| 011 | .070 (1.78) | .301 (7.65) | .025 |
| 012 | .070 (1.78) | .364 (9.25) | .025 |
| 013 | .070 (1.78) | .426 (10.82) | .025 |
| 014 | .070 (1.78) | .489 (12.42) | .025 |
| 015 | .070 (1.78) | .551 (13.99) | .025 |
| 017 | .070 (1.78) | .676 (17.17) | .025 |
| 018 | .070 (1.78) | .739 (18.77) | .025 |
| 019 | .070 (1.78) | .801 (20.34) | .025 |
| 020 | .070 (1.78) | .864 (21.94) | .025 |
| 021 | .070 (1.78) | .926 (23.52) | .025 |
| 022 | .070 (1.78) | .989 (25.12) | .025 |
| 024 | .070 (1.78) | 1.114 (28.30) | .025 |
| 026 | .070 (1.78) | 1.239 (31.47) | .025 |
| 028 | .070 (1.78) | 1.364 (34.65) | .025 |
| 114 | .103 (2.62) | .612 (15.54) | .054 |
| 115 | .103 (2.62) | .676 (17.17) | .054 |
| 117 | .103 (2.62) | .799 (20.29) | .054 |
| 126 | .103 (2.62) | 1.362 (34.59) | .054 |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

(B) TABLE 1. Dimensions - Continued.

| PIN 1/ M83528/002X | Dimension B 2/ 3/ 4/ | Dimension C 2/ 4/ 5/ | Cross section area ($cm^2$) 6/ |
|---|---|---|---|
| 128 | .103 (2.62) | 1.487 (37.77) | .054 |
| 132 | .103 (2.62) | 1.737 (44.12) | .054 |
| 134 | .103 (2.62) | 1.862 (47.30) | .054 |
| 142 | .103 (2.62) | 2.362 (59.99) | .054 |
| 145 | .103 (2.62) | 2.550 (64.77) | .054 |
| 155 | .103 (2.62) | 3.987 (101.27) | .054 |

1/ "X" in the PIN shall be replaced by the applicable material type. Complete PIN example: M83528/002A007.
2/ See MIL-G-83528/5 for additional sizes.
3/ Tolerance on dimension B shall be ±.003 for parts with a diameter of .070 and below; ±.005 for diameters from .101 to .200.
4/ Dimensions are in inches; metric equivalents are in parentheses.
5/ Tolerance on dimension C shall be ±.010 for parts from .000 to 1.500, ±.015 for parts from over 1.500 to 2.500; ±.020 for parts from over 2.500 to 4.500.
6/ For calculation of volume resistivity (for reference only).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

(8) TABLE II. Supersession information.

| PIN 1/ M83528/002X | Superseded DESC drawing PIN 85105X 1/ |
|---|---|
| 007 | 015 |
| 011 | 016 |
| 012 | 017 |
| 013 | 018 |
| 014 | 019 |
| 015 | 021 |
| 017 | 025 |
| 018 | 028 |
| 019 | 029 |
| 020 | 031 |
| 021 | 032 |
| 022 | 033 |
| 024 | 036 |
| 026 | N/A |
| 028 | 042 |
| 114 | 066 |
| 115 | N/A |
| 117 | 067 |
| 126 | 070 |
| 128 | 071 |
| 132 | 073 |
| 134 | N/A |
| 142 | 075 |
| 145 | N/A |
| 155 | 076 |

1/ "X" in the PIN indicates the applicable material type.

CONCLUDING MATERIAL

Custodians:
Air Force - 85
Navy - EC
Army - ER

Review activities:
Air Force - 19, 99
NSA - NS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0286-02)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.