[INCH-POUND]

MIL-G-83528/6B
30 June 1989
SUPERSEDING
MIL-G-83528/6A
9 September 1988


MILITARY SPECIFICATION SHEET

Ⓑ

GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, RECTANGULAR, D-CROSS SECTION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-G-83528.

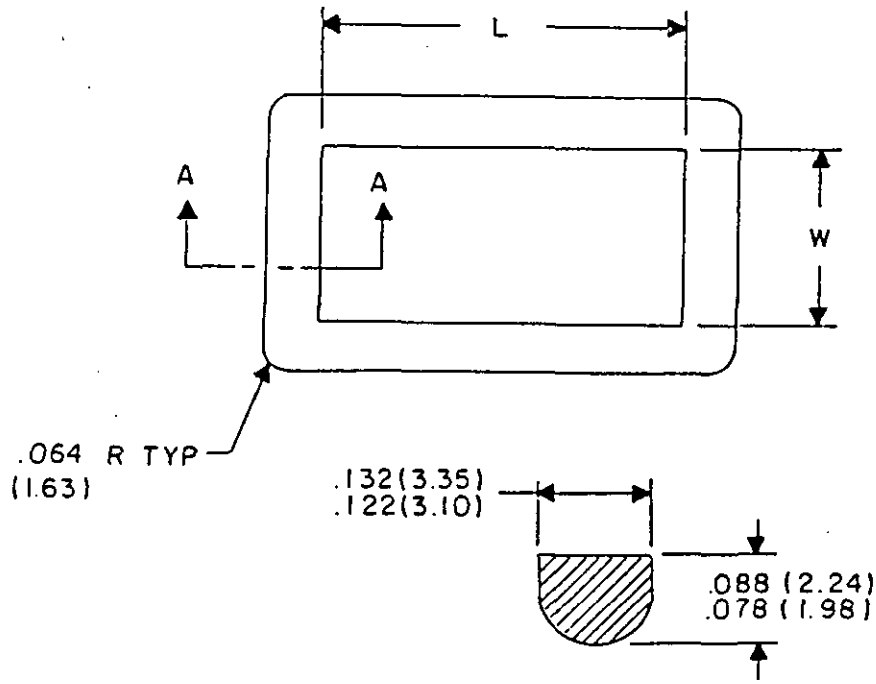

SECTION A-A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Flash tolerance shall be ±.008 on extension and ±.005 on thickness.
4. Metric equivalents are in parentheses.

FIGURE 1. EMI/RFI gaskets to be used with waveguide flanges.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.

(B) Material: A, B, C, D, E, F, H, K, or L.

(B) Part or Identifying Number (PIN): See table I.

Supersession information: See table II.

(B) TABLE I. Dimensions. 1/

PIN M83528/006X 2/ 3/	W		L		Cross section area cm^2 4/
	Min	Max	Min	Max	
001	.285 (7.24)	.295 (7.49)	.983 (24.97)	.993 (25.22)	.057
002	.485 (12.32)	.495 (12.57)	.983 (24.97)	.993 (25.22)	.057
003	.619 (15.72)	.629 (15.98)	1.243 (31.57)	1.253 (31.83)	.057

1/ Metric equivalents are in parentheses and are given for general information only.

(B) 2/ "X" in the PIN shall be replaced by the applicable material type.

(B) 3/ Complete PIN will include an additional letter to indicate material type. Example: M83528/006A001.

(B) 4/ For calculation of volume resistivity (see 4.6.11 of MIL-G-83528). For reference only.

TABLE II. Supersession information.

(B)

PIN M83528/006X 1/	Superseded DESC drawing 1/ PIN 85100X
001	001
002	002
003	003

(B) 1/ "X" in the PIN indicates the applicable material type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 19, 20, 99
NSA - NS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0260-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.