INCH-POUND
A-A-59326/2B
September 12, 2005
SUPERSEDING
A-A-59326/2A
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, MALE BY HOSE SHANK, TYPE II

The General Services Administration has authorized the use of this federal specification sheet by all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

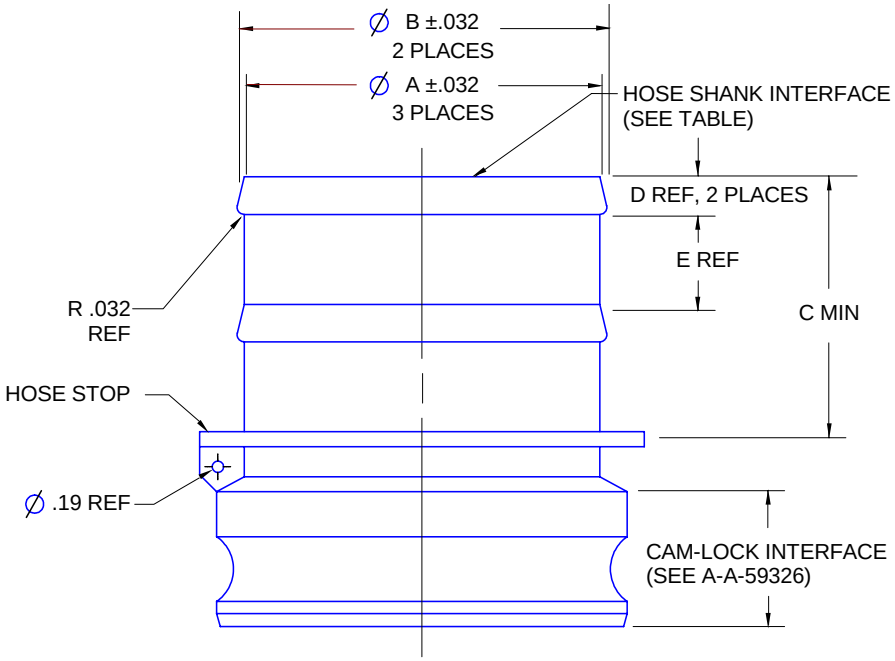

FIGURE 1. ½ through 4-inch coupling.

Dimensions are in inches.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: US Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

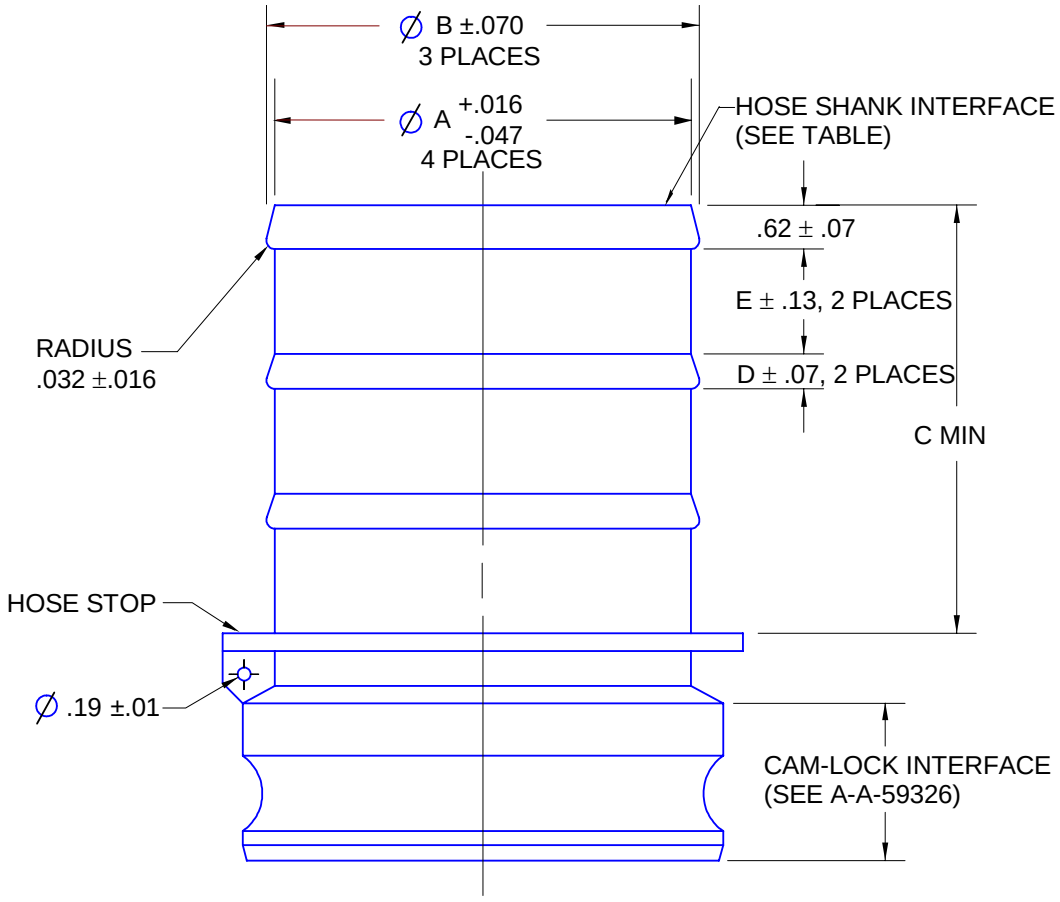

FIGURE 2. 6-inch Coupling
Dimensions are in inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

1. SCOPE: This specification sheet covers a male hose shank cam-locking type coupling half.
2. CLASSIFICATION:
    1. For interpretation of geometric tolerancing symbology, see ASME Y14.5M.
    2. The size of the coupling shall conform to table 1.

TABLE I. Coupling half size.

Dash No.	Cam-Lock Nom. Size	Hose Shank Dimensions				
		A	B	C	D	E
1	½	.484	.594	1.31	.19	.47
2	¾	.734	.844	2.00	.25	.75
3	1	.984	1.078	2.25	.38	.75
4	1 ¼	1.234	1.344	2.25	.38	.81
5	1 ½	1.484	1.594	2.38	.38	.81
6	2	1.969	2.094	2.75	.38	1.12
7	2 ½	2.484	2.626	3.12	.44	1.38
8	3	2.969	3.125	4.00	.50	1.56
9	4	3.969	4.125	4.25	.50	1.75
10	6	6.000	6.125	6.50	.50	1.50

3. SALIENT CHARACTERISTICS. The following characteristics differ from those listed in A-A-59326.

3.1 Hydrostatic test pressure. The ½-inch through 6-inch couplings shall withstand a hydrostatic test pressure of 300 pounds per square inch gage (psig). The 6-inch, 75 psi rated couplings shall withstand a hydrostatic test pressure of 150 psig.

3.2 Working Pressure. The ½-inch through 4-inch couplings shall be rated for 150 pounds per square inch working pressure. The 6-inch couplings shall be rated for 75 psi or 150 psi working pressure as appropriate.

3.3 Hose Shank. The minimum number of hose serrations on the hose shank shall be as shown in Figure 1. Dimensions B, D, and E in Table 1 define the diameter and location of the required hose serrations. Additional serrations are allowable. When additional serrations are used on the hose shank, all of the dimensions in Table 1 shall still be met. Additional serrations shall not exceed the diameter shown in Table 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

TABLE II. Additional Hose Serration Diameter

Dimensions are in inches

Dash No.	Size	Maximum Serration Diameter
2	¾	0.796
3	1	1.046
4	1 ¼	1.312
5	1 ½	1.531
6	2	2.031
7	2 ½	2.562
8	3	3.062
9	4	4.062
10	6	6.094

4. NOTES.

4.1 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. This example describes a part numbering system for specification sheet A-A-59326/2B.

AA59326/2B-4-B; /2B indicates a Male By Hose shank Type II Coupling; -4 indicates 1 ¼ inches size; and -B indicates Brass or Bronze.

Material: A -Aluminum
B -Brass or Bronze
BA -Aluminum Bronze
SS -Stainless Steel

4.2 International Standardization. Certain provisions of this specification (dimensions) are the subject of international standardization agreement (see A-A-59326).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force – 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Preparing Activity:
Army - AT

(Project 4730-2005-072)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.