FED. SUP CLASS
6640

USER ACTIVITIES:
ARMY - AR, GL, ME
DoD - DM, DP

REVIEWER ACTIVITIES:

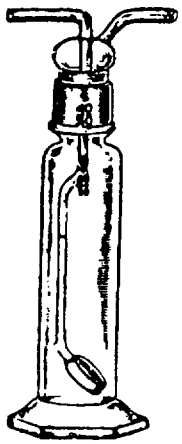

PART NUMBER	CAPACITY mL	DIMENSIONAL DATA		
		NOMINAL PORE SIZE OF DISK micrometers	DIA OF DISK mm	GROUND JOINT SIZE
MS36287-1	125	40	20	40/50

MATERIAL: Bottle shall be of borosilicate glass in accordance with ASTM E 438, Type I, Class A.

DESIGN: Bottle shall have a standard taper ground cap type closure, to which are sealed the gas inlet and outlet tubes. The inlet tube has a coarse porosity disc closing its exit to provide a uniform dispersion of gas bubbles for efficient absorption. Tubulations shall have an outside diameter of 8 mm. Bottle shall have a large hexagonal base for stability.

NOTES:
1. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
2. FSCMs: 14674, 22527, and 59728.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 18 JUN 1965 REVISED Ⓐ 17 JUL 1987

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust EA MS		BOTTLE, GAS WASHING	MS36287
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-1437-2

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:37Z
Check the source to verify that this is the current version before use.