
FED. SUP CLASS
4730

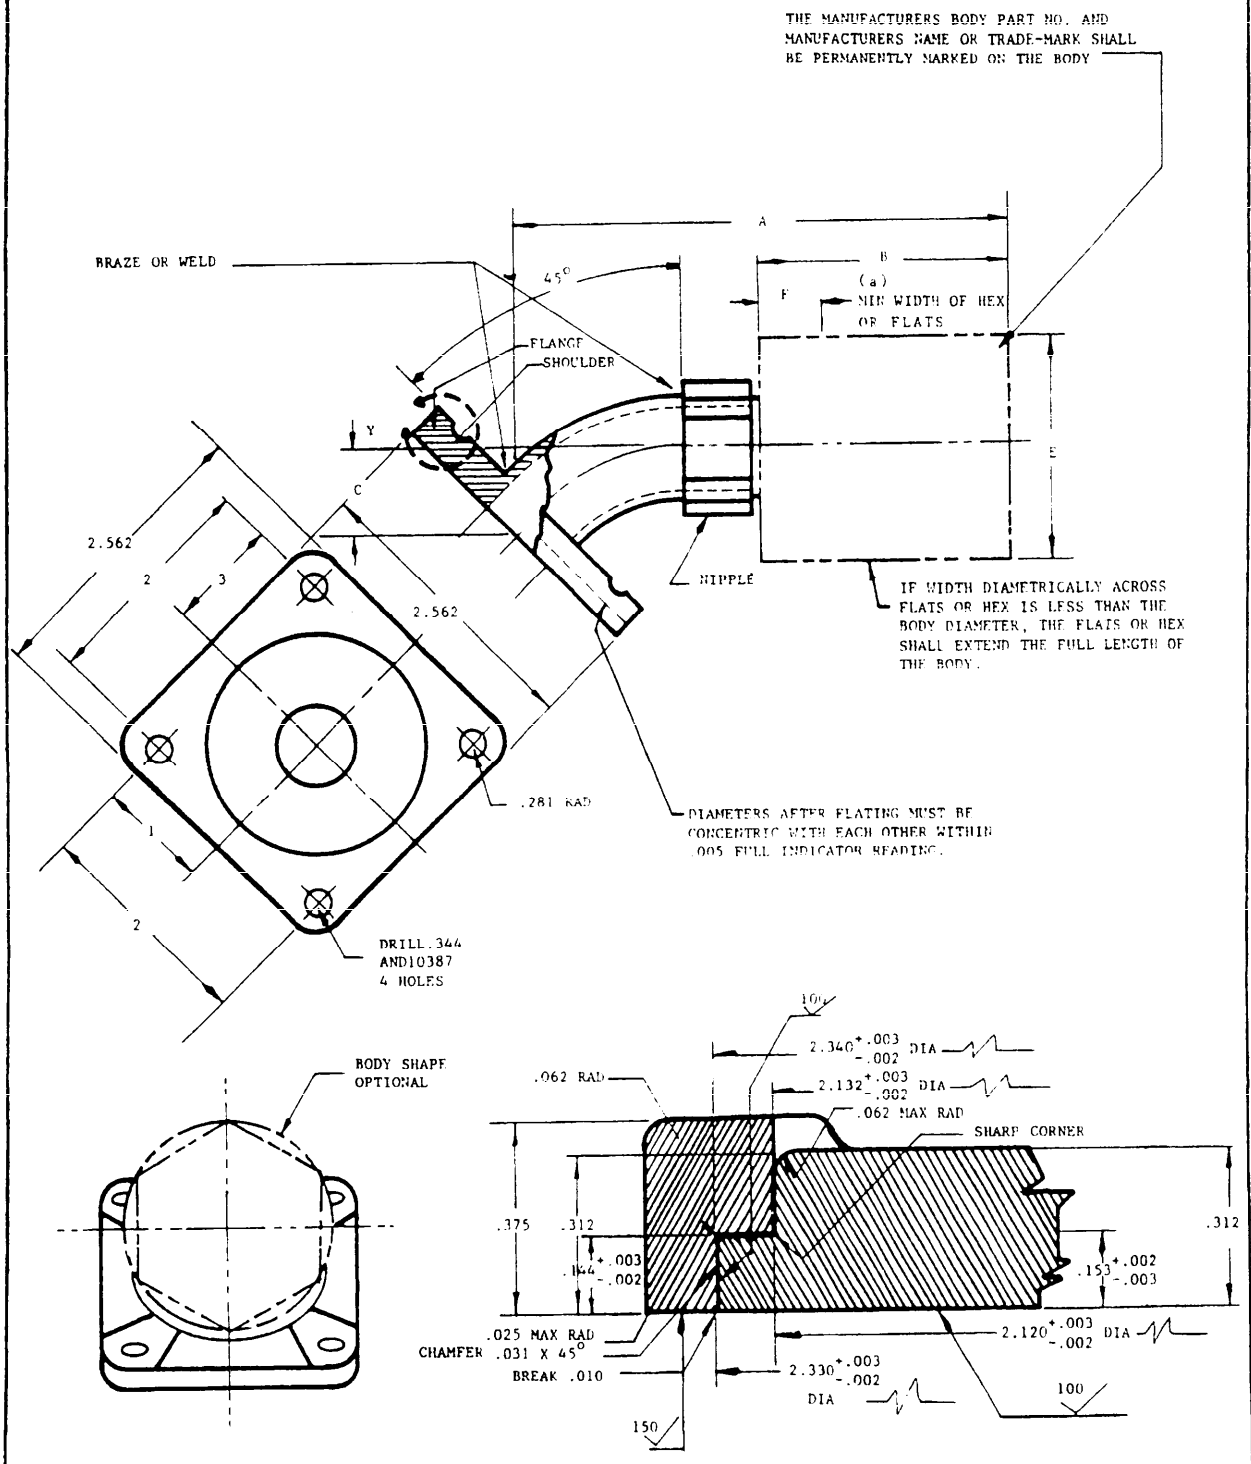

© REINSTATED

APPROVED 24 SEPT 51 — REVISED (A) 22 MAY 53 (B) 1 JUL 54 (C) 30 Aug 63

USER ACTIVITIES

REVIEWER ACTIVITIES DLA-CS ARMY-ME

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. AF 82 Other Cust AIR FORCE - 99 NAVY - AS	INTERNATIONAL INTEREST	TITLE FITTING END - HOSE, SWIVEL, DETACHABLE, FLANGED, 4 BOLT, 45°	MILITARY STANDARD MS 28746
PROCUREMENT SPECIFICATION MIL-A-5070	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED)

Downloaded from https://assist.dla.mil -- Downloaded: 20260423T16:58Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES

REVIEWER ACTIVITIES
DLA - CS
ARMY - ME

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
4730

INACTIVE FOR DESIGN AFTER 22 MAY 1953. SEE DRAWING MS28749.

MS PART NO.	TUBING OD	A MAX	B MAX	C	D DIA	F MAX DIA	F	WT LB APPROX
MS28746-24	1.500	4.047	1.844	.812	1.281	2.188	.625	1.013
MS28746-32	2	4.859	2.250	.953	1.750	2.625	.875	1.264

(a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.
(b) PART NOS. MS -16 AND MS -20 INACTIVE FOR DESIGN AFTER 21 SEPTEMBER 1951. NO SUPERSEDING MS STANDARD.

© FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE MIL-STD-962.

© MATERIAL: FLANGE: STEEL, QQ-S-637. SEE PROCUREMENT SPECIFICATION,
NIPPLE AND SHOULD: STEEL, QQ-A-367.
TUBING: STEEL, 1010, MIL-T-5066A.
BODY: AL ALLOY, QQ-A-225/6.

© FINISH: STEEL: CADMIUM PLATE, QQ-P-416, OR ZINC PLATE, ASTM B-633-78.
AL ALLOY: ANODIC FILM, MIL-A-8625.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°.
FOR ACCEPTABLE PRODUCTS SEE QUALIFIED PRODUCTS LIST QPL-5070-1.

THE MS PART NO. AND THE MANUFACTURERS NAME OR TRADE-MARK SHALL BE PERMANENTLY MARKED ON THE NIPPLE.

NOTE:
1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 24 SEPT 51 REVISED © FOR CHANGES SEE SHEET 1

P. A. AF 82 Other Cust AF 99 NAVY CS	INTERNATIONAL INTEREST	TITLE FITTING END-HOSE, SWIVEL, DETACHABLE, FLANGED, 4 BOLT, 45°	MILITARY STANDARD MS 28746
PROCUREMENT SPECIFICATION MIL-A-5070	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.