

FED. SUP CLASS
6220

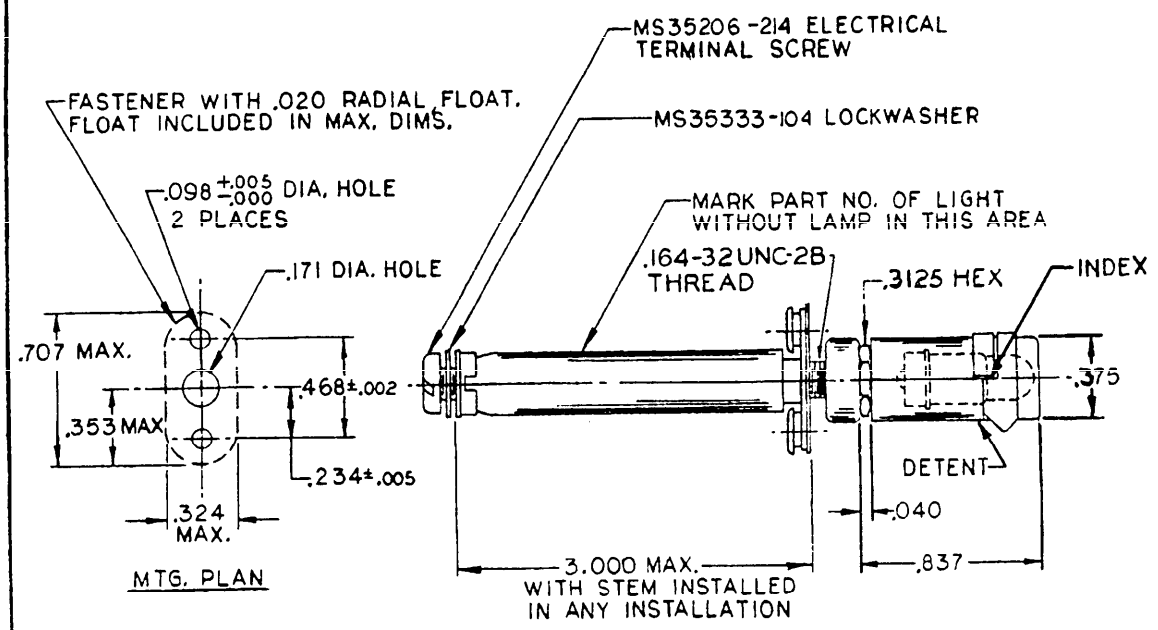

ASSEMBLY OF LIGHT WITH RECEPTACLE

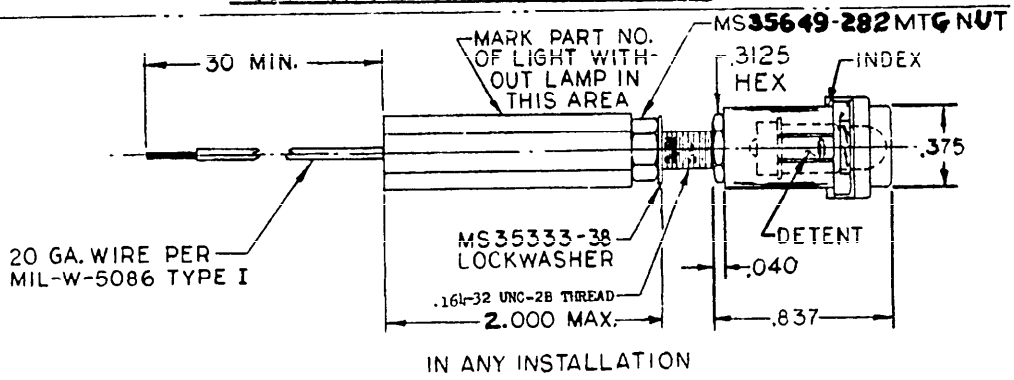

ASSEMBLY OF LIGHT WITH SOCKET

MS PART NO.*	ITEM
MS28799-1	RED LIGHT WITH RECEPTACLE
MS28799-2	WHITE LIGHT WITH RECEPTACLE
MS28799-3	RED LIGHT WITH SOCKET
MS28799-4	WHITE LIGHT WITH SOCKET

*LIGHT WITHOUT LAMP

(B) REDRAWN

APPROVED 17 MAR 61 REVISED (B) 28 FEB 79

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust USAF - 99 ARMY - ME	TITLE: LIGHT, COCKPIT, AIRCRAFT, INSTRUMENT, POST TYPE, UNIVERSAL	MILITARY STANDARD MS28799
PROCUREMENT SPECIFICATION MIL-L-5057	SUPERSEDES: MS28799(WEP)	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 6220-0252 PLATE NO. 23085

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:00Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6220

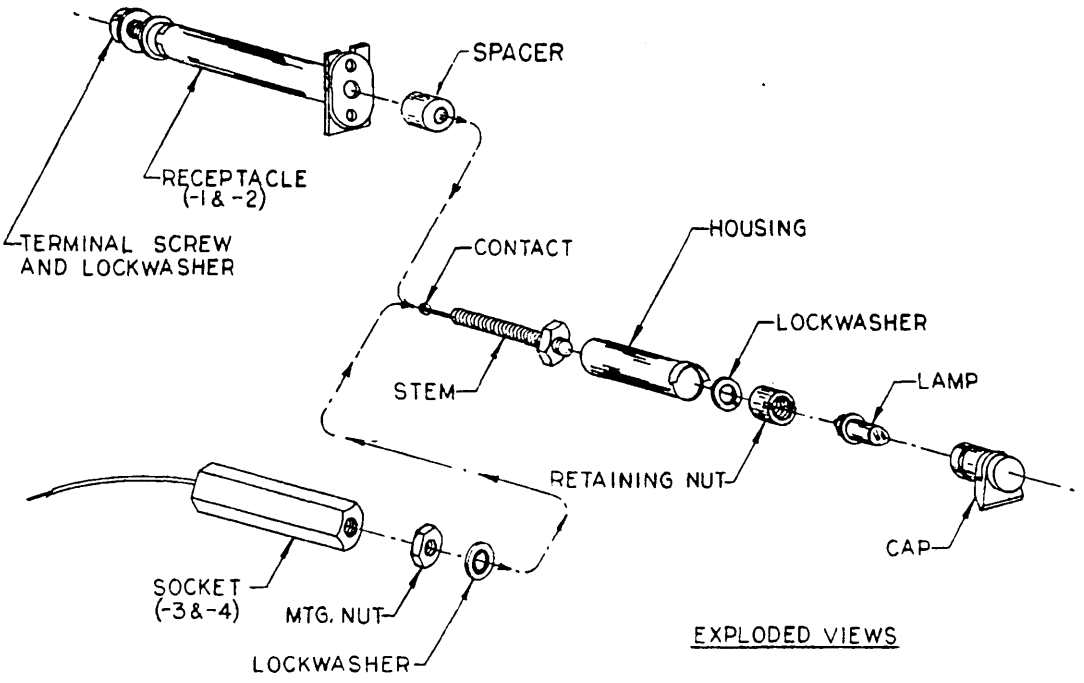

EXPLODED VIEWS

REQUIREMENTS:

1. PART NUMBERS OF LIGHTS WHICH INCLUDE LAMPS SHALL BE MARKED ON THEIR SHIPPING CONTAINERS ONLY.
2. FOR FLANGE-MOUNTED INSTRUMENTS INSTALLED WITH MOUNTING FLANGE ON FRONT (DIAL) SIDE OF INSTRUMENT PANEL, USE LIGHT WITH RECEPTACLE. USE SPACER FOR COUNTERBORED INSTRUMENTS - DISCARD FOR NON-COUNTERBORED INSTRUMENTS.
3. FOR FLANGE-MOUNTED INSTRUMENTS INSTALLED WITH MOUNTING FLANGE ON BACK SIDE OF INSTRUMENT PANEL, USE LIGHT WITH SOCKET. DISCARD MOUNTING NUT AND LOCKWASHER IF INSTRUMENT INCLUDES MOUNTING NUTS.
4. FOR CLAMP-MOUNTED INSTRUMENTS, USE LIGHT WITH RECEPTACLE AND SPACER.
5. HOUSING SHALL BE FREE TO ROTATE WITHOUT LIMIT ON THE STEM UNTIL RETAINING NUT IS TIGHTENED.
6. INDEX SHALL PREVENT CAP FROM BEING INSTALLED ON HOUSING IN MORE THAN ONE ORIENTATION.
7. THE DETENT SHALL RETAIN THE CAP ON THE HOUSING.
8. WEIGHT: 0.04 LB MAX.
9. OPTICAL PATHS OF WHITE LIGHTS SHALL BE COLOR NON-SELECTIVE.

NOTES:

1. IF MS25237-327 LAMP IS DESIRED, ADD SUFFIX -327 TO PART NUMBER OF LIGHT WITHOUT LAMP. IF MS25237-328 LAMP IS DESIRED, ADD SUFFIX -328 TO PART NUMBER OF LIGHT WITHOUT LAMP.
2. DIMENSIONS ARE IN INCHES.
3. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016, ANGLES ±1°.
4. LIGHTS SHALL BE IN ACCORDANCE WITH MIL-L-5057.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 17 MAR 61 (B) FOR CHANGES SEE SHT 1 AND 2

P.A. NAVY - AS Other Cust USAF - 99 ARMY - ME	TITLE LIGHT, COCKPIT, AIRCRAFT, INSTRUMENT, POST TYPE, UNIVERSAL	MILITARY STANDARD MS28799
PROCUREMENT SPECIFICATION MIL-L-5057	SUPERSEDES: MS28799(WEP)	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 6220-0252 PLATE NO. 23065

Source: https://assist.dla.mil -- Downloaded: 20261O-23T17:00Z
Check the source to verify that this is the current version before use.