
FED. SUP CLASS
4730

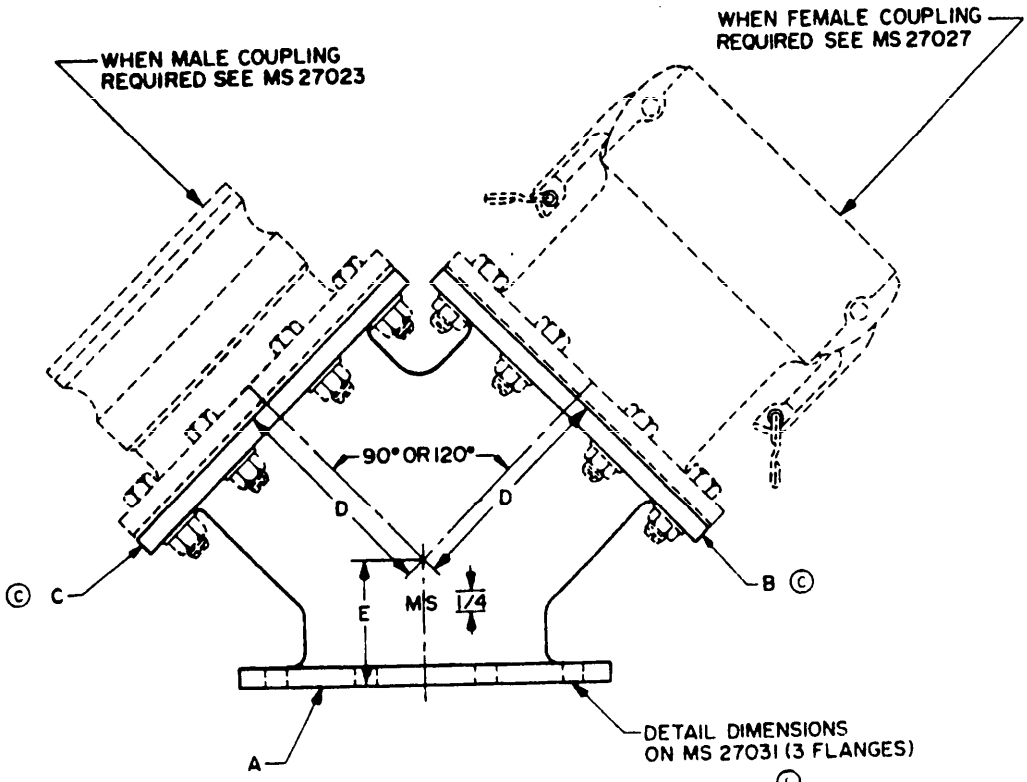

DASH NUMBER	CLASS NUMBER		NOMINAL END SIZE			DIMENSIONS	
	CLASS 1	CLASS 2	A	B	C	E	D
-5	X		6	6	6	3-1/2-5	6-1/8-9
-6		X					
-1	X		4	4	4	2-1/4-3-1/2	4-1/4-6
-2		X					
-3	X		3	3	3	2-1/8-3	4-5
-4		X					
-7	X		2	2	2	2-3	3-4
-8		X					

NOTES:

1. MATERIAL
   a. BODY
      CLASS 1 ALUMINUM - QQ-A-601, alloys 356.0-T6, 712.0-T5 or 713.0-T5
      CLASS 2 BRASS - QQ-C-390, ALLOY 836, 844 OR 922; OR BRASS, QQ-B-626, COPPER ALLOY 377
2. FINISH
   a. BODY
      CLASS 1 ALUMINUM - MIL-A-8625, ANODIC COATING TYPE II, CLASS 1.
      CLASS 2 BRONZE OR BRASS - BODY AND CAM ARMS, PLAIN.
3. BURRS AND ALL FOREIGN MATERIAL SHALL BE REMOVED.
4. HYDROSTATIC TEST PRESSURE - 2, 3, AND 4 INCH, 300 P.S.I.; 6 INCH, 150 P.S.I.
5. WORKING PRESSURE - 2, 3, AND 4 INCH, 150 P.S.I.; 6 INCH, 75 P.S.I.
6. DIMENSIONS IN INCHES, NOMINAL UNLESS OTHERWISE SPECIFIED.
7. PART NUMBER - THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS39336-1.
8. THE STANDARD Y-CONNECTION CAN BE USED IN COMBINATION WITH STANDARD COUPLINGS, ADAPTERS, AND REDUCERS AS REQUIRED TO PROVIDE REQUIRED ITEMS.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

© DENOTED CHANGES

APPROVED 10 DECEMBER 1970 REVISED (A) 30 SEPTEMBER 1975 (B) 16 JULY 1980 © 21 February 1984

REVIEW ACTIVITIES: USER ACTIVIES:
ARMY - AV, GL — ARMY - AT
AIR FORCE - 82 — NAVY - MC
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-ME Other Cust NAVY-YD A.F.-99	STANAG NO. 2761 QSTAG 240	Y CONNECTION, QUICK DISCONNECT, CAM-LOCKING TYPE, FLANGE, TYPE XX.	MS39336
PROCUREMENT SPECIFICATION MIL-C-27487	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

4730-0465

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:52Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

NOTE:

CERTAIN PROVISIONS (DIMENSIONS) OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (STANAG NO. 2761 AND QSTAG 240). WHEN CHANGE NOTICE, REVISION, OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILLIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 10 DECEMBER 1970 REVISED © FOR CHANGES SEE SHEET 1

P. A. ARMY-ME Other Cust: NAVY-YD A. F.-99	INTERNATIONAL INTEREST STANAG NO. 2761 QSTAG 240	TITLE Y CONNECTION, QUICK DISCONNECT, CAM-LOCKING TYPE, FLANGE, TYPE XX.	MILITARY STANDARD MS39336
PROCUREMENT SPECIFICATION MIL-C-27487	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:52Z
Check the source to verify that this is the current version before use.