FED. SUP CLASS
5315

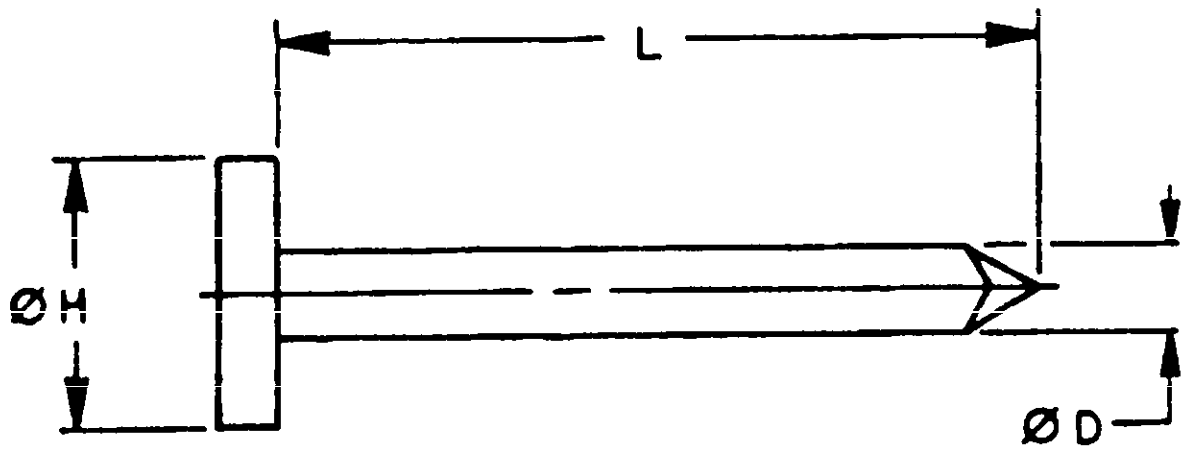

A-ROUND SMOOTH SHANK



B-BARB SHANK

TABLE I. DASH NUMBERS AND DIMENSIONS

BOX NAIL

DASH NUMBER						
SMOOTH SHANK	BARBED SHANK	COMMERCIAL SIZE	ØD	ØH ± 10%	L	NUMBER PER LB (APPROX)
-1	-21	2d	.067 ± .002	.188	1 ± 1/32	940
-2	-22	3d	.076 ± .004	.219	1 1/4 ± 1/16	588
-3	-23	4d	.080 ± .004	.219	1 1/2 ± 1/16	453
-4	-24	5d	.080 ± .004	.219	1 3/4 ± 1/16	389
-5	-25	6d	.099 ± .004	.266	2 ± 1/16	225
-6	-26	7d	.099 ± .004	.266	2 1/4 ± 1/16	200
-7	-27	8d	.113 ± .004	.297	2 1/2 ± 1/16	136
-8	-28	9d	.113 ± .004	.297	2 3/4 ± 3/32	124
-9	-29	10d	.128 ± .004	.312	3 ± 3/32	90
-10	-30	12d	.128 ± .004	.312	3 1/4 ± 3/32	83
-11	-31	16d	.135 ± .004	.344	3 1/2 ± 3/32	69
-12	-32	20d	.148 ± .004	.375	4 ± 3/32	50

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

REVIEWER ACTIVITIES:
ARMY - GL
NAVY - SA

CIVIL AGENCIES COORDINATING ACTIVITIES
GSA- FSS

USER ACTIVITIES:
ARMY-- AV,CE,ME,MI
NAVY-- MC

APPROVED 28 OCT 86 REVISED

P. A.
ARMY-AR
Other Cust
NAVY-YD
AIR FORCE-99

INTERNATIONAL INTEREST

TITLE
NAIL, BOX

MILITARY STANDARD
MS 51549

PAGE 1 OF 2

PROCUREMENT SPECIFICATION
FF-N- 105

SUPERSEDES:

AMSC N/A

DD FORM 1 MAY 73 672-1 COORDINATED:

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5315-0406

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5315

REQUIREMENTS:

1. MATERIAL: NAIL, TYPE II, STYLE 4, SHALL BE MANUFACTURED FROM STEEL WIRE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

2. CHARACTERISTICS: NAIL SHALL HAVE FLAT HEAD, ALTERED OR T-HEAD (FOR USE WITH MECHANICAL DRIVERS), DIAMOND OR BLUNT POINT, ROUND SMOOTH OR BARBED SHANK, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

3. PROTECTIVE COATING AND SURFACE TREATMENT: BOX NAILS SHALL BE CEMENT COATED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

4. SHANK DIAMETERS: TOLERANCES ON SHANK DIAMETERS SHALL BE ± .004 INCH FOR DIAMETERS .076 INCH AND LARGER, AND ± .002 INCH FOR DIAMETERS SMALLER THAN .076 INCH. TOLERANCES SHALL APPLY BEFORE APPLICATION OF PROTECTIVE COATING OR FINISHES. DIAMETERS OF MECHANICALLY DEFORMED SHANKS SHALL BE MEASURED BEFORE DEFORMATION.

5. LENGTHS: TOLERANCES ON LENGTHS SHALL BE ± 1/32 INCH FOR LENGTHS UP TO AND INCLUDING 1 INCH; ± 1/16 INCH FOR LENGTHS OVER 1 INCH UP TO AND INCLUDING 2 1/2 INCHES; ± 3/32 INCH FOR LENGTHS OVER 2 1/2 INCHES UP TO AND INCLUDING 7 INCHES AND ± 1/8 INCH FOR LENGTHS OVER 7 INCHES.

6. HEAD DIAMETERS:

   (A) HAND DRIVEN. THE DIFFERENCE IN DIAMETER ACROSS THE LONG AXIS SHALL NOT EXCEED THAT ACROSS THE SHORT AXIS BY MORE THAN 10 PERCENT. A FILLET SHALL BE PROVIDED UNDER THE HEAD, AN ANGLE OR RADIUS WILL BE ACCEPTABLE. HEADS SHALL BE WELL CENTERED.

   (B) MECHANICALLY DRIVEN: TOLERANCES ON HEAD DIAMETER OF MECHANICALLY DRIVEN NAILS SHALL COMPLY WITH MANUFACTURER'S SPECIFICATIONS AND SHALL BE SUITABLE FOR USE IN THE MAKE AND MODEL OF GUN SPECIFIED.

7 PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I AND A POINT CODE IDENTIFIER.

EXAMPLE: MS51549-7B

```
EXAMPLE: MS51549-7B
           |      ||
           |      |└──POINT CODE IDENTIFIER
           |      |
           |      |       B - BLUNT
           |      |
           |      |       D - DIAMOND
           |      |
           |      └───DASH NUMBER
           |
           └──────────BASIC MS NUMBER
```

MS51549-7B INDICATES: NAIL, BOX; .113 SHANK DIAMETER; .297 HEAD DIAMETER; 2 1/2 LENGTH; SMOOTH SHANK, BLUNT POINT.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

REVIEWER ACTIVITIES:
ARMY-GL
NAVY-SA

CIVIL AGENCIES COORDINATING ACTIVITIES
GSA-FSS

USER ACTIVITIES:
ARMY-AV,CE,ME,MI
NAVY-MC

[illegible] by all Departments and Agencies of the Department of Defense.
[illegible] applications and for repetitive use shall be made from this

APPROVED 28 OCT 86 REVISED

P. A. ARMY-AR Other Cust NAVY-YD AIR FORCE-99	INTERNATIONAL INTEREST	TITLE NAIL, BOX	MILITARY STANDARD MS51549
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES:		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T18:07Z
Check the source to verify that this is the current version before use.