INCH-POUND

MIL-P-83461/2
30 JANUARY 1991

MILITARY SPECIFICATION SHEET

PACKING, PREFORMED, PETROLEUM HYDRAULIC FLUID RESISTANT IMPROVED PERFORMANCE AT 275°F (135°C) FOR USE IN BOSS FITTINGS, SIZES AND TOLERANCES

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-P-83461.


Purpose. The purpose of this specification sheet is to set up a standardized part numbering system for O-rings procured to MIL-P-83461 for use in straight thread tube boss fittings.

APPLICABLE DOCUMENT


AS 568 Aerospace Size Standard for O-Rings

(Application for copies should be addressed to Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

DIMENSIONS AND TOLERANCES

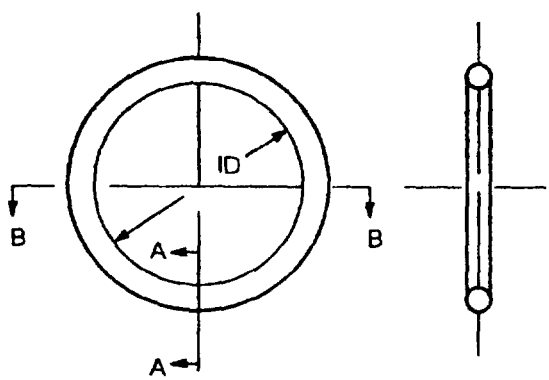

SECTION B - B

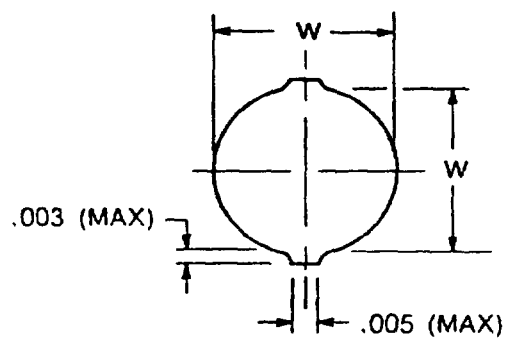

SECTION A - A
ENLARGED

DISTRIBUTION STATMENT A Approved for public release, distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:14Z
Check the source to verify that this is the current version before use.

Intended use. O-rings listed in table I are recommended for use as straight thread tube fittings boss gaskets.

TABLE I. Straight thread tube fittings boss gaskets

Dash No. 1/	Tube Outside Diameter (inch)	W Cross-Section (inch)		I.D. (inch)	
901	.094	.056	±.003	.185	±.005
902	.125	.064		.239	
903	.188	↓		.301	
904	.250	.072		.351	
905	.312			.414	
906	.375	.078		.468	↓
907	.438	.082		.530	±.007
908	.500	.087		.644	±.009
909	.562	.097		.706	
910	.625		↓	.755	
911	.688	.116	±.004	.863	
912	.750			.924	↓
913	.812			.986	±.010
914	.875			1.047	
916	1.000			1.171	↓
918	1.125	↓		1.355	±.012
920	1.250	.118		1.475	±.014
924	1.500			1.720	↓
928	1.750			2.090	±.018
932	2.000	↓	↓	2.337	↓

1/ All dash numbers conform with the uniform dash system of AS 568.

NOTES:

1. Dimensions are in inches, tolerances, decimals ±.

2. All diameters of cross-section shall equal w

3. Part numbers. When this document is used for procurement of O-rings, part numbers shall consist of the following:

   a. The letter M and the specification sheet number.

   b. A dash followed by the appropriate dash number from table I.

Example

M83461/2-903

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:14Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Review activities:
Navy - SH
Air Force - 82, 99
DLA - IS

User activities:
Army - ME
Navy - NADEPOT - Alameda
Air Force - 71
Marine Corps - MC

Preparing activity:
Air Force - 11

(Proj No. 5330-0853)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:14Z
Check the source to verify that this is the current version before use.