MIL-R-83459/2B
16 January 1986
SUPERSEDING
MIL-R-83459/2A
15 January 1979

MILITARY SPECIFICATION SHEET

RIVET, TITANIUM, BIMETAL, 95 KSI F_{su}, 100° TENSION CROWN HEAD, TYPE II

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the rivet described herein shall consist of this document and the issue in effect of MIL-R-83459.

Materials:	Body - 6A1-4V titanium alloy (AMS 4967) Tail - 45Cb titanium alloy (AMS 4982)
Heat treatment:	Body - Heat treated to 95 KSI minimum shear strength Tail - Heat treated to 50 KSI minimum shear strength
Surface texture:	(RHR maximum per ANSI B46.1) 63 microinches on straight shank, head to shank radius and bearing surface of head: 125 microinches on other surfaces.
Finish:	None.
Lubrication:	As specified in MIL-R-83459, Cetyl alcohol in accordance with MIL-L-87132, Type I, Grade B.
Concentricity:	Conical surface of head to "D" diameter within .003 TIR.

Part number example: M83459/2-6-4

- M83459/2 — Basic part number
- -6 — Diameter dash number from table I
- -4 — Grip dash number from table II

Application notes:
1. Do not use rivets which must be cut to length.
2. Do not use rivets in less than specific minimum grip.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENES, Wright-Patterson AFB, OH 45433-6503 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:14Z
Check the source to verify that this is the current version before use.

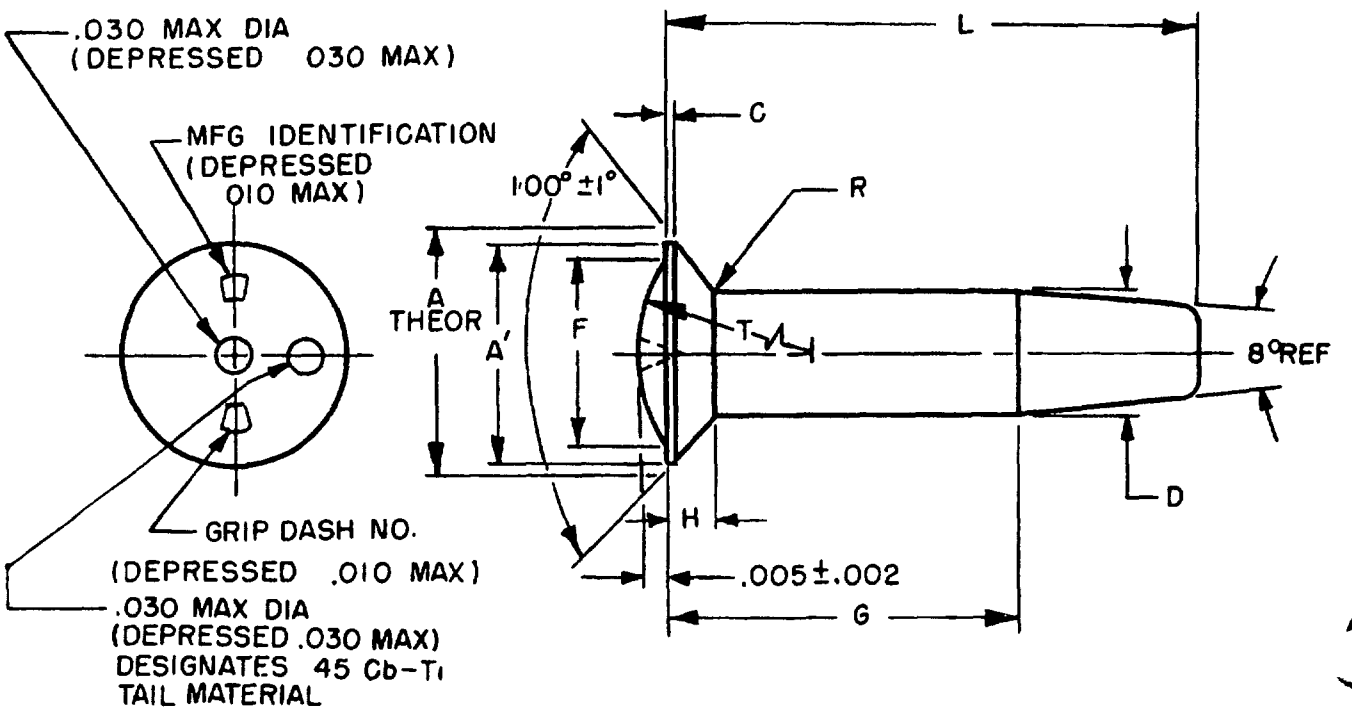


TABLE I. Dimensions.

1st DASH NO. DIA.	-5	-6	-8	-10	-12
NOMINAL DIAMETER	5/32	3/16	1/4	5/16	3/8
D +.0000, - .0005	.1635	.1895	.2495	.3120	.3745
A ±.0025	.286	.353	.476	.564	.694
A' (MINIMUM)	.271	.336	.456	.540	.670
C ±.002	.004	.005	.006	.008	.008
F ±.005	.261	.326	.446	.530	.660
H (REFERENCE)	.051	.069	.095	.106	.134
R ±.005	.020	.025	.025	.035	.035
T (REFERENCE)	1.70	2.66	4.98	7.03	10.90
G (GRIP)	SEE TABLE II				
L (LENGTH)	SEE TABLE II				
WEIGHT	SEE TABLE III				

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:14Z
Check the source to verify that this is the current version before use.

TABLE II. Lengths in inches.

Grip Range		G	5/32 DIA.		3/16 DIA.		1/4 DIA.		5/16 DIA.		3/8 DIA.	
MIN.	MAX.	+.015 -.000	DASH NO.	L ±.010	DASH NO.	L ±.010	DASH NO.	L ±.010	DASH NO.	L ±.010	DASH NO.	L ±.010
.126	.187	.125	5-3	.360	6-3	.385						
.188	.250	.187	5-4	.422	6-4	.447	8-4	.502	10-4	.577		
.251	.312	.250	5-5	.485	6-5	.510	8-5	.565	10-5	.620	12-5	.675
.313	.375	.312	5-6	.547	6-6	.572	8-6	.627	10-6	.682	12-6	.737
.376	.437	.375	5-7	.610	6-7	.635	8-7	.690	10-7	.745	12-7	.800
.438	.500	.437	5-8	.672	6-8	.697	8-8	.752	10-8	.807	12-8	.862
.501	.562	.500	5-9	.735	6-9	.760	8-9	.815	10-9	.870	12-9	.925
.563	.625	.562	5-10	.797	6-10	.822	8-10	.877	10-10	.932	12-10	.987
.626	.687	.625	5-11	.860	6-11	.885	8-11	.940	10-11	.995		
.688	.750	.687	5-12	.922	6-12	.947	8-12	1.002	10-12	1.057		
.751	.812	.750	5-13	.985	6-13	1.010	8-13	1.065	10-13	1.120		
.813	.875	.812	5-14	1.047	6-14	1.072	8-14	1.127	10-14	1.182		
.876	.937	.875	5-15	1.110	6-15	1.135	8-15	1.190	10-15	1.245		
.938	1.000	.937	5-16	1.172	6-16	1.197	8-16	1.252	10-16	1.307		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:14Z
Check the source to verify that this is the current version before use.

TABLE III. Weights.

Pounds Per 1000 Pieces					
2nd Dash No. Grip	1st Dash No. and Nominal Dia.				
	-5 5/32	-6 3/16	-8 1/4	-10 5/16	-12 3/8
-3	1.50	2.37			
-4	1.72	2.65	5.20	9.25	
-5	1.94	2.93	5.69	10.01	16.60
-6	2.16	3.21	6.18	10.78	17.79
-7	2.38	3.49	6.67	11.54	18.89
-8	2.60	3.77	7.16	12.31	19.99
-9	2.82	4.05	7.65	13.07	21.09
-10	3.04	4.33	8.14	13.84	22.19
-11	3.26	4.61	8.63	14.60	
-12	3.48	4.89	9.12	15.37	
-13	3.70	5.17	9.61	16.13	
-14	3.92	5.45	10.10	16.90	
-15	4.14	5.73	10.59	17.66	
-16	4.36	6.01	11.08	18.43	

Custodian:
Navy - AS
Air Force - 11

Preparing activity:
Air Force - 11

Project No. 5320-0582

Reviewer:
Air Force - 82, 99
DLA - IS

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:14Z
Check the source to verify that this is the current version before use.