MS9844 (ASG)

FED. SUP CLASS
5315

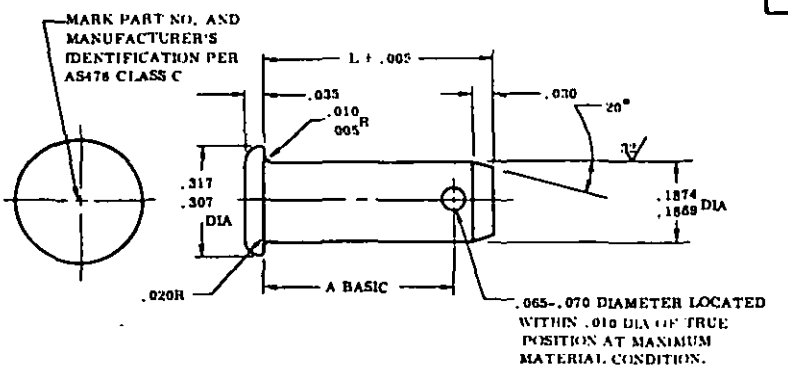

PART NO.	A	L	APPROX WEIGHT LB/100	PART NO.	A	L	APPROX WEIGHT LB/100	PART NO.	A	L	APPROX WEIGHT LB/100
				MS9844-21	1.315	1.390	1.140	MS9844-36	2.253	2.328	1.880
				MS9844-22	1.378	1.453	1.200	MS9844-37	2.315	2.390	1.930
				MS9844-23	1.440	1.515	1.240	MS9844-38	2.378	2.453	1.980
MS9844-04	.253	.328	.310	MS9844-24	1.503	1.578	1.290	MS9844-39	2.440	2.515	2.030
MS9844-05	.315	.390	.360	MS9844-25	1.565	1.640	1.340	MS9844-40	2.503	2.578	2.080
MS9844-06	.378	.453	.410	MS9844-26	1.628	1.703	1.390	MS9844-41	2.565	2.650	2.140
MS9844-07	.440	.515	.460	MS9844-27	1.690	1.765	1.440	MS9844-42	2.628	2.703	2.180
MS9844-08	.503	.578	.510	MS9844-28	1.753	1.828	1.490	MS9844-43	2.690	2.765	2.220
MS9844-09	.565	.640	.550	MS9844-29	1.815	1.890	1.540	MS9844-44	2.753	2.828	2.280
MS9844-10	.628	.703	.600	MS9844-30	1.878	1.953	1.590	MS9844-45	2.815	2.890	2.320
MS9844-11	.690	.765	.650	MS9844-31	1.940	2.015	1.640	MS9844-46	2.878	2.953	2.370
MS9844-12	.753	.828	.700	MS9844-32	2.003	2.078	1.680				
MS9844-13	.815	.890	.750	MS9844-33	2.065	2.140	1.730				
MS9844-14	.878	.953	.800	MS9844-34	2.128	2.203	1.780				
MS9844-15	.940	1.015	.850	MS9844-35	2.190	2.265	1.830				
MS9844-16	1.003	1.078	.900								
MS9844-17	1.065	1.140	.950								
MS9844-18	1.128	1.203	1.000								
MS9844-19	1.190	1.265	1.050								
MS9844-20	1.253	1.328	1.100								

NOTES:
1. MATERIAL: AMS 5616.
2. HARDNESS: ROCKWELL C45-50.
3. FLUORESCENT PENETRANT INSPECTION PER AMS2645.
4. HEAD DIA TO BE CONCENTRIC WITH SHANK DIA WITHIN .003 FIR.
5. SURFACE TEXTURE: ASA B46.1 1962, UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
6. BREAK SHARP EDGES .003-.015.
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
8. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 29 Feb 68 REVISED

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF - 82, 85

P.A. USAF - 11 Other Cust NAVY - AS	TITLE PIN, STRAIGHT, HEADED .1874 DIAMETER, AMS5616	MILITARY STANDARD MS9844 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)
ASD use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-301-317/4695

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.