MILITARY SPECIFICATION SHEET

CABINET, STORAGE, STEEL: ADJUSTABLE SHELVES, VEHICULAR MOUNTING (FOR SURVEYING EQUIPMENT); TYPE XXI

The complete requirements for procuring the cabinet described herein shall consist of this document and the issue in effect of MIL-C-40060.

REQUIREMENTS:

Dimensions and configurations shall be as shown in figure 1.

COMPONENTS:

Doors, knobs, hinges, shelves, mounting strip, and channel guides shall be as specified herein and MIL-C-40060, as applicable.

CONSTRUCTION:

Doors. Each door shall be supported by two flush hinges.

Knobs. The knobs of doors shall be corrosion resistant metal or of a material treated to resist corrosion. The knobs shall operate latching mechanisms.

Mounting strips. The mounting strips shall be fabricated of steel not less than 2 inches wide by .0359 inch thick and shall be welded to the inside back of cabinet. Keyhole slots as shown on figure 1 shall be punched or cut, through back of cabinet and strips.

Shelves. The cabinet interior shall have channel guides spaced with slots (34) on 1 inch centers with the top slots 2-1/8 inches from cabinet top located in each half of the cabinet. There shall be 34 removable steel sheets in each half of the cabinet (68 per cabinet). The steel sheets shall be 11-1/4 inches long by 11-7/8 inches wide fabricated of 0.059 inch thick, 16 gage, sheet steel. The front edge of the sheet shall be cutout to a depth of 2-1/2 inches and shall be centered on the sheet. The radius of the cutout shall be 3-3/8 inches. All four outside corners shall have a radius of 3/8 inch.

Custodian:

Army - GL

Review activities:

Army - ME, NS

Preparing activity:

Army - GL

Project No. 7125-A054/21

FSC 7125

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.

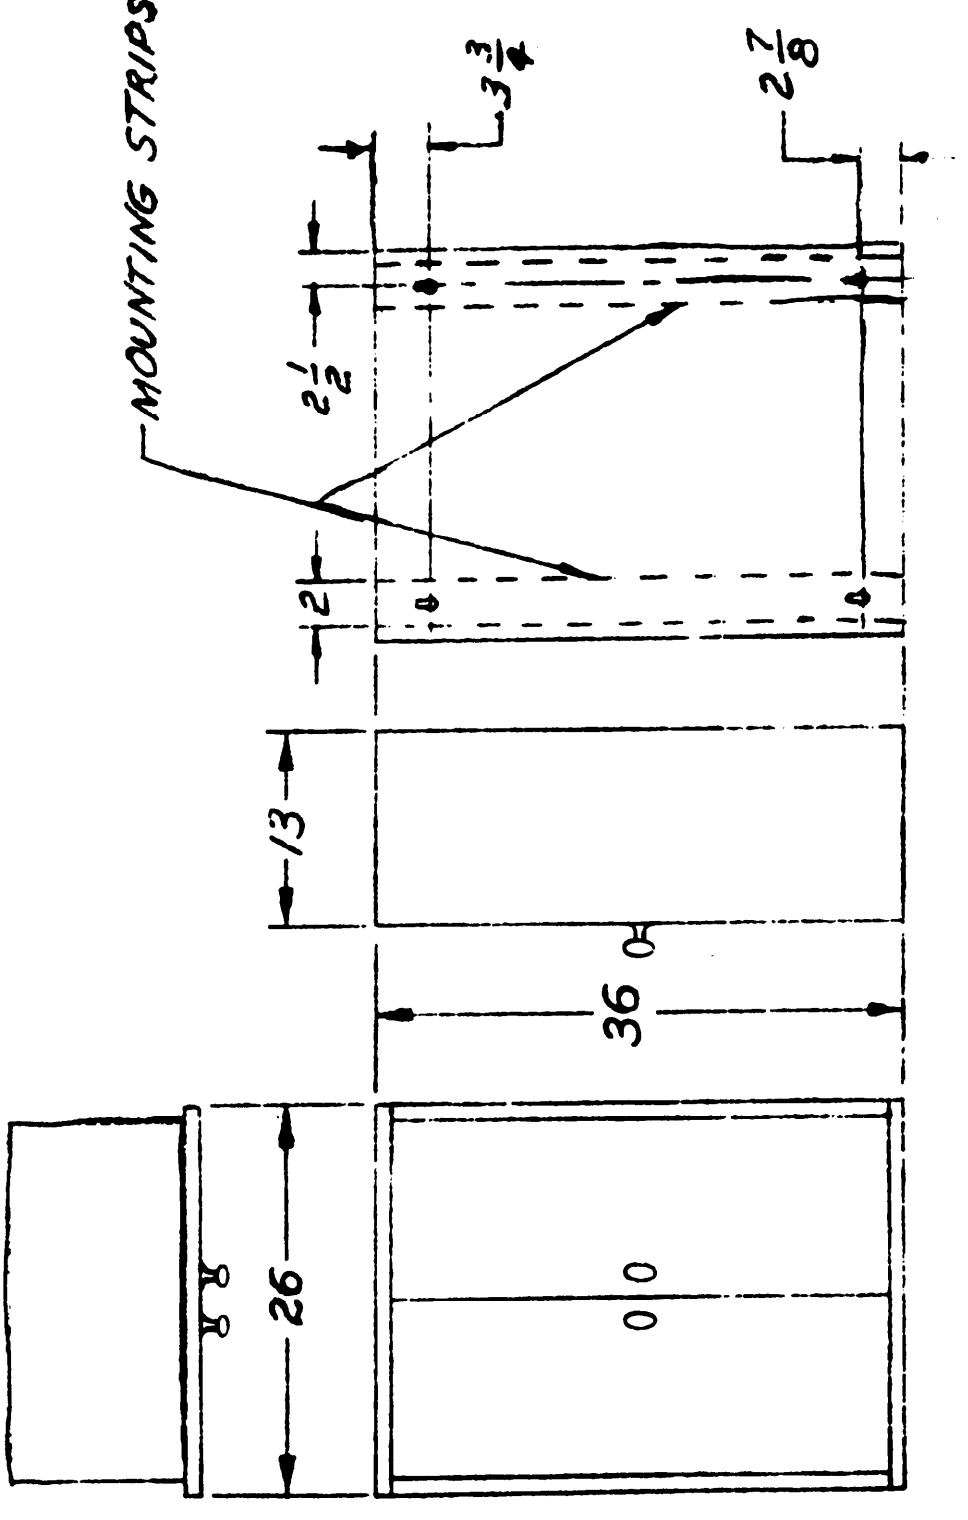


FIGURE 1. CABINET, STORAGE, STEEL, ADJUSTABLE SHELVES, VEHICULAR MOUNTING (FOR SURVEYING EQUIPMENT), TYPE XII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:10Z
Check the source to verify that this is the current version before use.