FED. SUP CLASS
4030

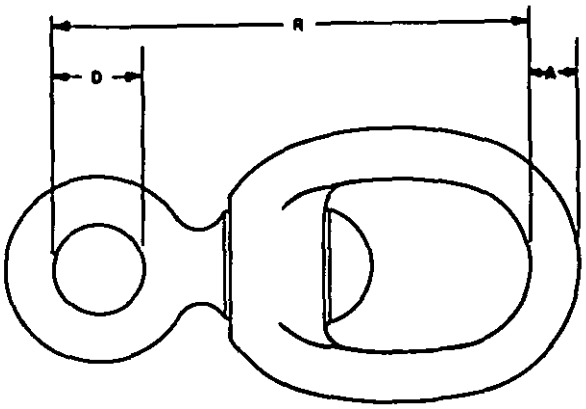

TABLE I

DASH NUMBER * MALLEABLE IRON	DASH NUMBER FORGING	A CHAIN SIZE ±.06	D DIAMETER OF EYE MIN.	R REACH MAX.
1		.19	.38	2.00
2	12	.25	.42	2.47
3	13	.31	.44	2.97
4	14	.38	.50	3.59
5		.44	.56	3.88
6	16	.50	.81	4.59
7	17	.63	.94	5.66
8	18	.75	1.00	6.47

NOTES:

1. MATERIAL: * Malleable iron: tensile strength min. 50,000 PSI: yield point min. 32,500 PSI; elongation in 2 inches min. 14.0%.
   Forged carbon steel, in accordance with procurement specification.
2. PROTECTIVE COATING: Zinc coating (hot dip galvanized) in accordance with ASTM A153, with supplementary chromate treatment in accordance with MIL-C-17711.
3. DIMENSIONS: All dimensions are in inches unless otherwise specified.
4. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
   Example: MS87007-12
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Reference documents shall be of the issue in effect on date of invitations for bid.
7. The illustration is for identification and is not intended to restrict design or shapes not dimensioned.
- (B) * 8. CANCELLED IN PART AFTER 21 MARCH 1973 Use old dash numbers until existing stock is depleted. For new design and engineering use new dash numbers listed on Table II.

INTERCHANGEABILITY TABLE
TABLE II

PART NUMBER CANCELLED	(B) PART NUMBER NEW	PART NUMBER CANCELLED	PART NUMBER NEW
MS87007-1	MS87007-12	MS87007-5	MS87007-16
-2	-12	-6	-16
-3	-13	-7	-17
-4	-14	-8	-18

REVISED (A) 21 MAR 1973 (B) 2 MAY 1974
APPROVED 2 MAY 1963

REVIEWER: EL,CL,IS,ME,82
USER: AT,AV,MC,OS,YD,SM

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC / Other Cust 82	TITLE: SWIVEL, EYE AND LINK	MILITARY STANDARD MS87007
PROCUREMENT SPECIFICATION FF-C-271	SUPERSEDES: SCCI1	SHEET 1 OF 1

DD FORM 672-1 (Cancellation)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:30Z
Check the source to verify that this is the current version before use.