FED. SUP CLASS
4720

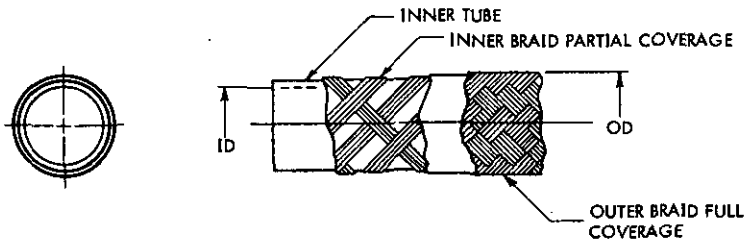

HOSE SIZE	EQUIV. OD TUBE	ID INNER TUBE	OD OVER BRAID	CONC. OD to ID TIR	WT. MAX LBS/IN.
-3	3/16	.156 ± .015	$^{+.023}_{.375\ -.020}$	.020	.0077
-4	1/4	.219 ± .015	$^{+.023}_{.438\ -.020}$	.020	.0095
-5	5/16	.281 ± .015	$^{+.023}_{.484\ -.020}$	.020	.0120
-6	3/8	.344 ± .015	$^{+.023}_{.547\ -.020}$	.020	.0129
-8	1/2	.438 ± .023	$^{+.023}_{.649\ -.020}$	.020	.0141
-10	5/8	.562 ± .023	.797 ± .023	.020	.0172
-12	3/4	.688 ± .023	.938 ± .023	.030	.0237
-16	1	.875 ± .031	1.156 ± .031	.030	.0317
-20	1-1/4	1.125 ± .031	1.437 ± .031	.030	.0408
-24	1-1/2	1.375 ± .031	1.704 ± .031	.030	.0562
-32	2	1.781 ± .031	$^{+.047}_{2.094\ -.031}$	.030	.0817

(A) CANCELLED AFTER 15 JUNE 1976 - USE MIL-H-83797/1

NOTES

1. Materials and construction: Seamless compounded inner tube of oil-resistant synthetic rubber reinforced with 18-8 corrosion-resistant steel in a manner to meet requirements of MIL-H-58089 and to retain the specified fittings without leakage or other malfunction when tested as specified in MIL-H-58089.
2. Hose is for use with MS87018 through MS87026 fittings in MS87028 through MS87032 assemblies.
3. Hose should be requisitioned in bulk quantities, and field maintenance units fabricate to specific lengths. Part numbers for specific lengths shall be used in ordering only when the need for cut specific lengths exceeds the field maintenance element capability. Examples of part numbers:

MS 87027 -( )R
- Random lengths as specified in MIL-H- 58089
- Hose size

MS 87027 -4-0124
- Eighths of an inch.
- Inches
- Hose size

4. Identification: See procurement specification.
5. Dimensions in inches. Unless otherwise specified, tolerances: Decimals, ± .010.
6. Referenced documents shall be of the issue in effect on date of invitation for bids.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REVIEWER:
USER:

APPROVED 10 Mar 69 REVISED (A) 15 JUNE 1976

This standard has been approved by the Aviation Systems Command, Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. ARMY (AV) Other Cust	TITLE HOSE, RUBBER, LIGHTWEIGHT, MEDIUM PRESSURE, FUEL AND OIL RESISTANT	MILITARY STANDARD MS87027(AV)
PROCUREMENT SPECIFICATION MIL-H- 58089(AV)	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:30Z
Check the source to verify that this is the current version before use.