Y 6609

FED. SUP CLASS.
5945

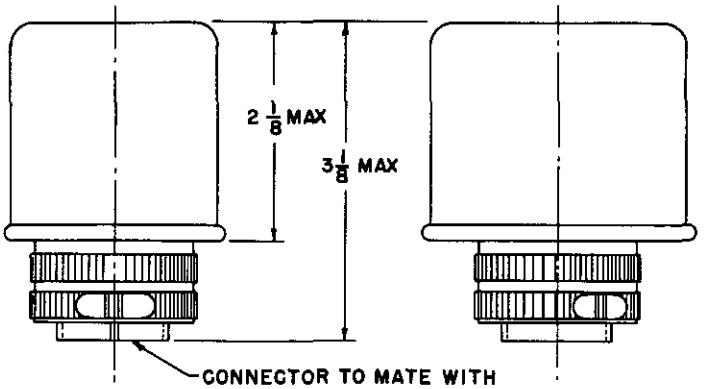

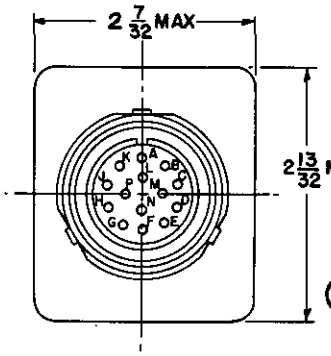

CANCELLED AFTER 3 MAY 1967
NO SUPERSEDING DOCUMENT
THE INSTALLATIONS FOR WHICH THE PANELLI MS25156-1 PARTS WERE ORIGINALLY DESIGNED NO LONGER EXIST. THESE PARTS ARE NOT SUITABLE FOR USE IN ANY OTHER APPLICATIONS.

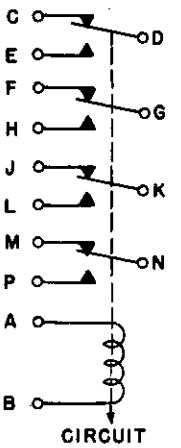

MS PART NO.	FIIN
MS25186-1	

NOTE:
1. TO BE USED AS A REPLACEMENT FOR AN3310 RELAYS. NOT TO BE USED FOR NEW DESIGN.
2. MUST MEET THE MINIMUM CURRENT REQUIREMENT OF MIL-R-6106

DETAIL REQUIREMENTS

(A)	MAXIMUM OPERATING VOLTAGE	29 VOLTS DC
(B)	PICKUP VOLTAGE	18 VOLTS DC
(C)	DROPOUT VOLTAGE	7 VOLTS +0,−5.5 DC
(D)	RATED LOAD (PER POLE)	

RESISTIVE (A-C 400-CYCLE 115 VOLTS)	NORMALLY OPEN	NORMALLY CLOSED
	10 AMP	10 AMP
RESISTIVE (DC)	10 AMP	10 AMP
INDUCTIVE (DC)	10 AMP	10 AMP
MOTOR (DC)	6 AMP	6 AMP

(E)	COIL CURRENT	0.35 AMP MAX
(F)	MINIMUM OPERATING PERIOD	3 HOURS
(G)	MINIMUM OPERATING CYCLES	50,000
(H)	MAXIMUM WEIGHT	0.75 POUND
(I)	RATED DUTY	CONTINUOUS
(J)	NOMINAL COIL VOLTAGE	28 VOLTS
(K)	TEMPERATURE RANGE	−65°C TO +120°C

APPROVED 7 JULY 58 REVISED (A) 3 MAY 1967

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS25186
Navy - BuAer	A - N - AF -	RELAY, 10 AMP, 4 PDT CONNECTOR MOUNTING, CLASS O	(AER)
PROCUREMENT SPECIFICATION: MIL-R-6106		SUPERSEDES: AN3310	SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-520/6609

Source: https://assist.dla.mil -- Downloaded: 202640-23T15:05Z
Check the source to verify that this is the current version before use.