



FED. SUP CLASS
6150

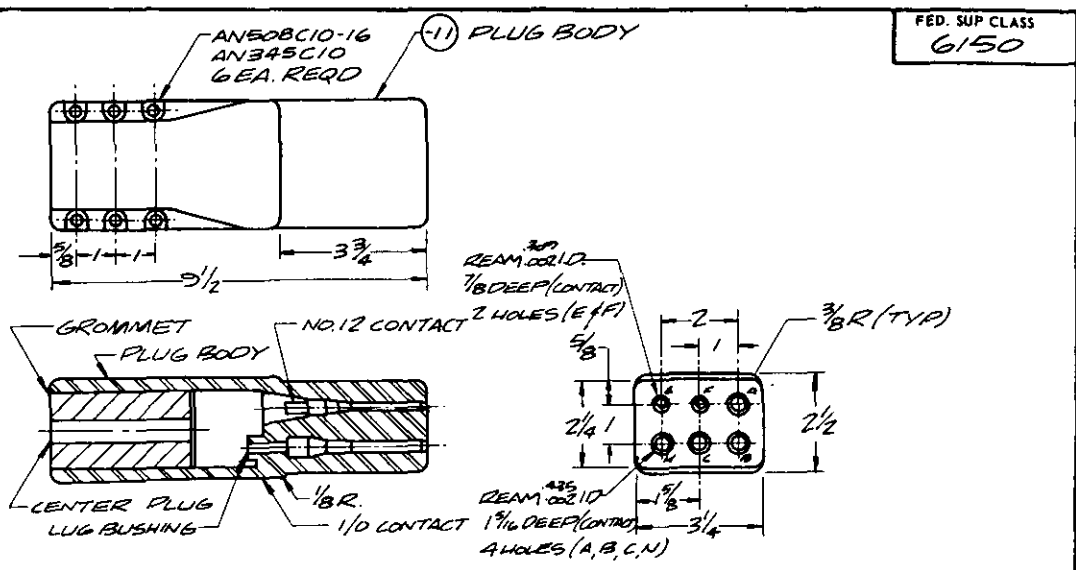

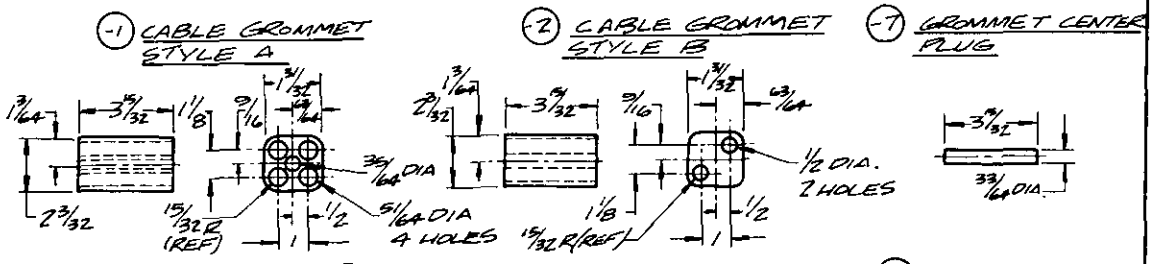

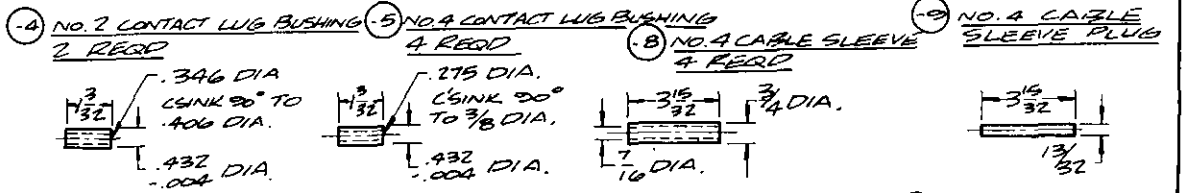

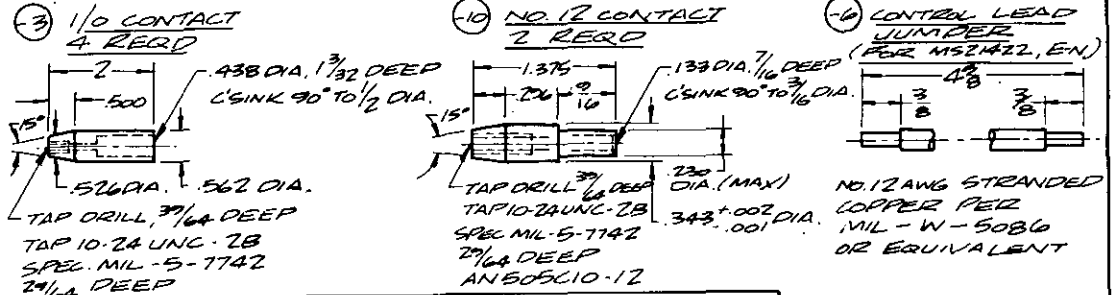

TO REPAIR CABLE TYPE	SELECT THE FOLLOWING ITEM KIT										
	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-11
AN3430-1A-2A-5-7	1		4							2	1
AN3430-3-4-6	1		4			1	1			2	1
(a) MS24122-1-2-3-4		1	2	2		1				1	1
(a) MS24122-5-6-7-8	1		2			1	1	2	2	1	1
MS24208	1		4		4			4		2	1
MS24249-1	1	1	4	2	4	1	1	4	2	2	1

(A) CANCELLED

Material: Parts; MS24249-3,-4,-5, and -10 tellurium copper or brass with .0002 minimum silver plate (same material and finish as spec. requirements for socket contacts).

Part; MS24249-1,-2,-7,-8,-9, and -11 Fungus-resistant rubber Spec. MIL-I-3930 or Butadiene-acrylonatride type (same as spec. requirements for plug body)

Each kit contains in addition to items given in table, one copy of MS24249 or equivalent.

Dimensions in inches. unless otherwise specified, tolerances: Fractions ± 1/64, Decimals ± .01 and ±.005

Provision for securing grommet in plug body to be provided

This standard takes precedence over documents referenced herein. Referenced documents shall be the issue in effect on date of invitations to bid. This standard has been approved by the department of the Air Force and is mandatory for use by that department.

APPROVED 19 APR 60 REVISED (A) 30 JUN 83

This military standard is approved by the Department of the and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P. A. 99 Other Cust	INTERNATIONAL INTEREST	TITLE: PARTS KIT, ELECTRICAL CABLE - PLUG	MILITARY STANDARD MS MS24249 (USAF)
PROCUREMENT SPECIFICATION MIL-C-7974	SUPERSEDES:		SHEET OF

DD FORM 1 MAY 73 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 — 605-034/4868

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:50Z
Check the source to verify that this is the current version before use.