
PROJECT NO. 5985-0839-1

FED SUP CLASS
5985

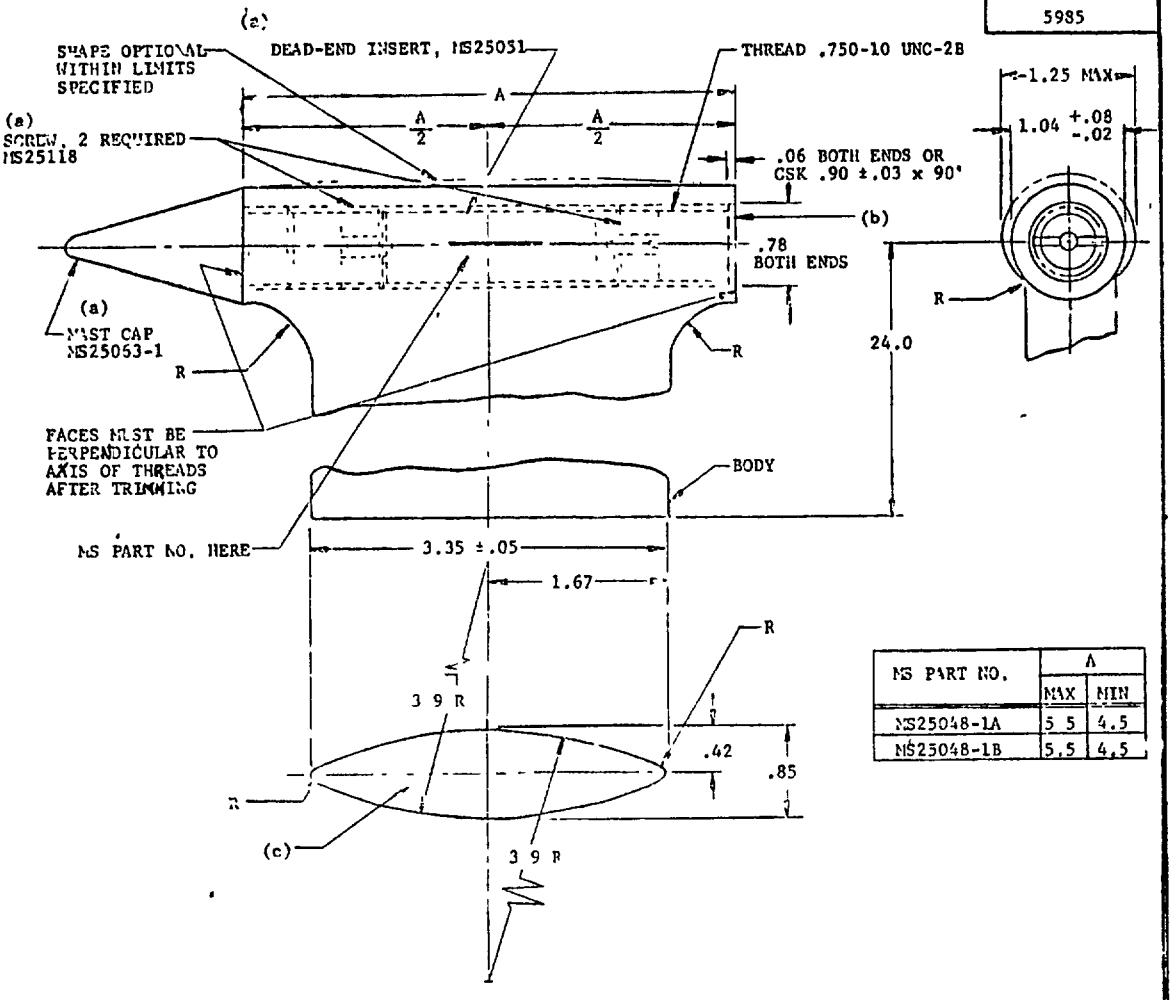

MS PART NO.	A	
	MAX	MIN
MS25048-1A	5.5	4.5
MS25048-1B	5.5	4.5

(a) DETAILS OF DEAD-END INSERT, SCREWS, AND CAP NOT REQUIRED WHERE MANUFACTURER CAN DEMONSTRATE AN INTEGRAL ASSEMBLY SATISFACTORY TO THE PROCURING ACTIVITY
(b) SUPPORT SLEEVE, MS25056 IS A PART OF THE DEAD-END MAST FOR PROCUREMENT PURPOSES.
(c) MAST MAY BE ROLLED IF PERFORMANCE IS NOT COMPROMISED

NOTES

1. MATERIAL BODY, GLASS FIBER REINFORCED POLYESTER RESIN BINDER, MIL-R-7575 OR MATERIAL OF EQUAL OR BETTER MECHANICAL AND ELECTRICAL PROPERTIES AND SUITABLE FOR THE PURPOSE
2. EXAMPLES OF PART NUMBERS MS25048-1A = MAST, ANTENNA, DEAD-END, 7,500 VOLTS
   MS25048-1B = MAST, ANTENNA, DEAD-END, 10,000 VOLTS
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ONE-PLACE DECIMALS ±.1, TWO-PLACE DECIMALS ±.02
4. THREADS SHALL CONFORM TO MIL-S-7742
5. MAXIMUM WEIGHT 3.40 POUNDS

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

(A) REVISED

APPROVED 18 AUG 55 REVISED (A) 18 JUNE 76

PA NAVY-AS Other Cust USAF - 85	TITLE MAST, ANTENNA, DEAD-END	MILITARY STANDARD MS25048
PROCUREMENT SPECIFICATION MIL-A-7935	SUPERSEDES MS25048(ASG)	SHEET 1 OF 1

DD FORM 1,672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO 23065

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:02Z
Check the source to verify that this is the current version before use.