[INCH-POUND]
A-A-55559/4
August 31, 1995


COMMERCIAL ITEM DESCRIPTION

# TAPE, ELECTRONIC DATA PROCESSING, 8 MILLIMETER (MM) (.315 INCH (IN)) WIDE, UNFORMATTED, SUPPLIED IN AN UNRECORDED HELICAL-SCAN DIGITAL COMPUTER TAPE CARTRIDGE

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for an unformatted 8 mm (.315 in), electronic data processing tape in an unrecorded helical-scan digital computer tape cartridge. Electronic data processing tapes covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

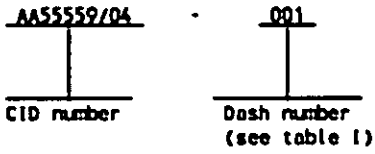


3. SALIENT CHARACTERISTICS

3.1 Design and construction. Electronic data processing tape supplied to this CID shall be as specified herein and shall meet the requirements of ANSI/ISO/IEC 11319.

3.2 Industry standard tape format. The industry standard tape format which this electronic data processing tape is compatible with shall be as specified in table I.

3.3 Tape width and tolerance. The tape width and tolerance shall be 8.0 mm ±0.010 mm (.315 inch ± .0005 inch).

3.4 Tape length. The tape length shall be as specified in table I.

TABLE I. Characteristics.

| CID PIN AA55559/04- | Industry standard tape format | Formatted memory capacity | Minimum tape length in meters (M) | Minimum tape length in feet (ft) |
|---|---|---|---|---|
| -001 | ANSI/ISO/IEC 11319 | 300 Megabyte (Mb) to 600 Mb | 15 | 49.21 |
| -002 | | 1.2 Mb to 2.4 Gigabyte (Gb) | 54 | 177.17 |
| -003 | | 2.3 Mb to 5.0 Gb | 112 | 367.45 |

3.5 Operating temperature. The operating ambient temperature shall be +5° Celsius (C) to +45°C (+41° fahrenheit (F) to +113°F).

3.6 Operating relative humidity. The operating relative humidity shall be 20 percent to 80 percent.

3.7 Maximum operating wet bulb temperature. The maximum operating wet bulb temperature shall be +26°C (+79°F).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 7045

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

3.8 Storage Temperature. The storage temperature shall be +5° Celsius (C) to +32°C (+41° F to +89°F).

3.9 Storage relative humidity. The storage relative humidity shall be 20 percent to 60 percent.

3.10 Maximum storage wet bulb temperature. The maximum storage wet bulb temperature shall be +26°C (+79°F).

3.11 Used or reconditioned material. A manufacturer shall not furnish any electronic data processing tape which is used or reconditioned or is comprised of used or reconditioned material.

3.12 Marking. Electronic data processing tape supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55559.

5. PACKAGING. Packaging shall be as specified in A-A-55559.

6. NOTES

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these instruments to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

6.3 Source of documents.

Commercial Item Description

A-A-55559 - Tape, Electronic Data Processing, Cartridge, General Specification for.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Other Publications.

AMERICAN NATIONAL STANDARDS INSTITUTE/INTERNATIONAL ORGANIZATION FOR STANDARDIZATION/INTERNATIONAL ELECTROTECHNICAL COMMISSION (ANSI/ISO/IEC)

ANSI/ISO/IEC 11319 - Information Technology - 8 mm Wide Magnetic Tape Cartridge for Information Interchange - Helical Scan Recording.

(Applications for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

6.4 Government users. To acquire information on obtaining these electronic data processing tapes from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOC, 1507 Wilmington Pike, Dayton, OH 45444-5520, or telephone (513) 296-5625.

6.5 Ordering data. Ordering data shall be as specified in A-A-55559.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

6.6 Suggested sources of supply. Suggested sources of supply are listed below. Additional sources will be added as they become available.

| CID dash number (see table I) AA55559/04- | Vendor commercial PIN CAGE 0CEN9 | Vendor commercial PIN CAGE 0DA14 | Vendor commercial PIN CAGE 0EGZ7 | Vendor commercial PIN CAGE 52327 |
|---|---|---|---|---|
| 001 | --- | --- | --- | --- |
| 002 | --- | 00-40046 | --- | 08-54M |
| 003 | PL8mm112 | L0-41812 | 14450 | 08-112M |

| Vendor CAGE number | Vendor name and address |
|---|---|
| 0CEN9 | Syncom Technologies, Incorporated<br>1000 Syncom Drive<br>Mitchell, SD 57301-4767<br>(800) 843-9862 |
| 0DA14 | Anacomp Incorporated<br>1155 Western Avenue<br>Cincinnati, OH 45203-1123<br>(203) 647-7646 |
| 0EGZ7 | BASF Corporation<br>Information Systems Division<br>35 Crosby Drive<br>Bedford, MA 01730-1471<br>(703) 642-1551 |
| 52327 | Minnesota Mining And Manufacturing Company<br>Data Storage Products Division<br>3M Center, 224-5N-39<br>St. Paul, MN 55144-1000<br>(805) 388-4029 |

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - KMR

Preparing Activity:

DLA-ES

Project 7045-0022-04



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.